


Quick Start Guide

SYG-S7G2-70C-MDK

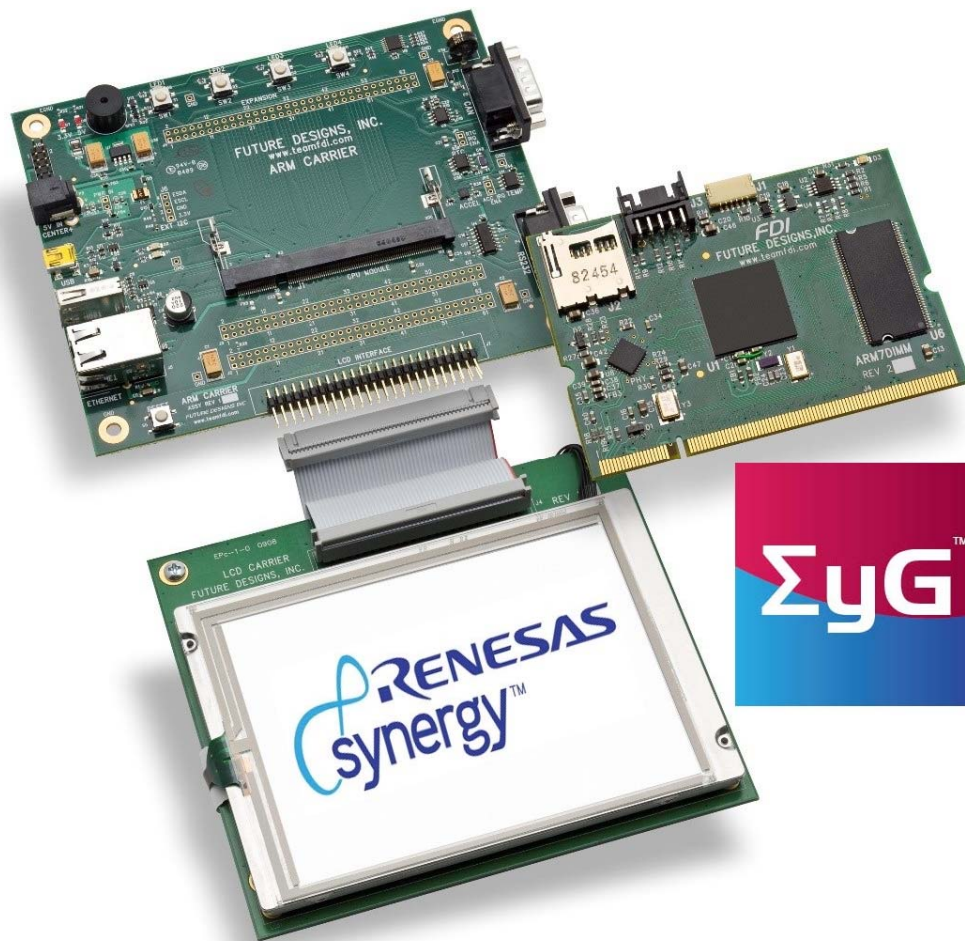

FDI *Future Designs, Inc.*
Your Development Partner
996 A Cleaner Way, Huntsville, AL 35805

Copyright ©2015, Future Designs, Inc., All Rights Reserved

Important Legal Information

Information in this document is provided solely to enable the use of Future Designs, Inc. (FDI) products. FDI assumes no liability whatsoever, including infringement of any patent or copyright. FDI reserves the right to make changes to these specifications at any time, without notice. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the express written permission of Future Designs, Inc. 996 A Cleaner Way, Huntsville, AL 35805.

NOTE: The inclusion of vendor software products in this kit does not imply an endorsement of the product by Future Designs, Inc.

ΣyG™ is a trademark of Future Designs, Inc.

Renesas Synergy™ is a trademark of Renesas Electronics Corporation.

Microsoft, MS-DOS, Windows, Windows XP, Microsoft Word are registered trademarks of Microsoft Corporation.

Other brand names are trademarks or registered trademarks of their respective owners.

Printed in the United States of America.

For more information on FDI or our products please visit www.TeamFDI.com.

© 2015 Future Designs, Inc. All rights reserved.



Copyright ©2015,
Future Designs, Inc

1.0 Introduction

The Future Designs, Inc. ΣyG™ Family provides a complete and qualified Graphical User Interface (GUI) / Human Machine Interface (HMI) platform for the rapid release of customer products. The core of ΣyG (pronounced, “sig”) is Renesas Synergy™ – a comprehensive and integrated software-based microcontroller platform. FDI adds the Synergy platform to its GUI hardware, systems and production expertise. The end result is a sum of high-quality products that provide a robust and proven source for GUI and HMI solutions:

ΣyG = Renesas Synergy+ GUI

The ΣyG-S7G2 7.0” PCAP Modular Development Kit is optimized to save development time in typical embedded control applications. The modular format uses a base carrier board, a Renesas Synergy S7G2 SOM (System on Module) and an LCD carrier board. The base carrier board includes expansion connectors for added flexibility and a range of configurations. FDI offers low cost customization services for customer specific hardware, software or packaging applications at volumes of 500 units or more.

2.0 Prerequisites

2.1 Kit Contents

- SYG-S7G2-SOM
- Carrier Board
- LCD Carrier Board
- 7.0” WVGA PCAP Touch Screen LCD
- 5V DC Center Positive 2A Power Supply
- Segger J-LINK Lite for Cortex-M with USB Type A to USB Type Mini-B cable
- USB Flash Drive
- CAT5 Ethernet Cable
- USB Type A to USB Type Mini-B cable
- Quick Start Guide

2.2 Required Software and Tools

- PC with Windows 7 or Windows 8
- e² studio Integrated Solution Development Environment (ISDE) from Renesas
- Renesas Synergy™ Software Package (SSP)
- GNU tool chain for ARM® Cortex®-M MCUs
- 7-zip



Copyright ©2015,
Future Designs, Inc

NOTE: Access to the Synergy Beta site is restricted to authorized Renesas Synergy beta program participants. If you require access to this site, contact your Renesas representative. The GNU tool chain and installation instructions for the tool chain are included in the e² studio ISDE download.

2.3 Software Installation

To install the tools, follow these steps:


- 1) For optimal results extracting e² studio ISDE and Renesas SSP files, download the latest version of 7-Zip from <http://www.7-zip.org>.
- 2) Download the latest version of the e² studio ISDE from <https://synergybeta.renesas.com/> and extract the files using 7-zip.
- 3) Download the latest version of the SSP from <https://synergybeta.renesas.com/> and extract the files using 7-zip.
- 3) Locate the ISDE_Installation_Guide within the e² studio ISDE file directory. Follow the installation instructions provided in the document.

NOTE: Renesas SSP includes the license file in its installation directory at “<Install Directory>\ISDE\internal\projectgen\arm\Licenses”. You must load the license file prior to initiating the first Renesas Synergy project into the e² studio ISDE.

3.0 Startup Procedure

3.1 Power On Board

To power the boards and run the demonstration software, connect the 5V power supply to the SYG-S7G2-70C-MDK kit. The device will start up and load the demo program from the internal flash.

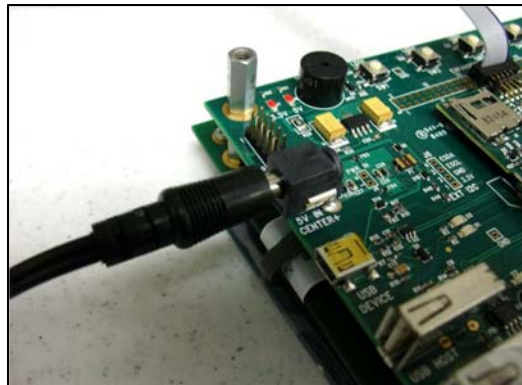

FDI

Copyright ©2015,
Future Designs, Inc


3.2 Load Demonstration Software

Once the device is powered on, the demonstration software start menu will appear on the LCD screen. The software consists of the brewing demonstration and temperature demonstration.




3.2.1 Brewing Demonstration

To launch the Brewing Demonstration tap the “Brewing Demo” button on the demonstration software start menu. The purpose of the Brewing Demonstration is to showcase Renesas SSP’s sprite animation capability. Bottles appear to move down the production line, fill with a liquid, and the man drinks the liquid.

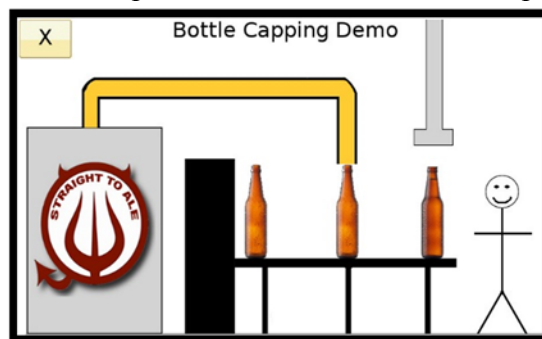

3.2.2 Temperature Demonstration

To launch the Temperature Demonstration, tap the “Temperature” button on the demonstration software start menu. This interactive demonstration displays the temperature of the processor and the temperature measured by an optional external sensor. Clicking on the “Deg. C” or “Deg. F” button will change the degree scale in which the temperatures are displayed. If you have a can of air duster, apply it over the external sensor located Component U11 on the Carrier Board and watch the temperature drop!

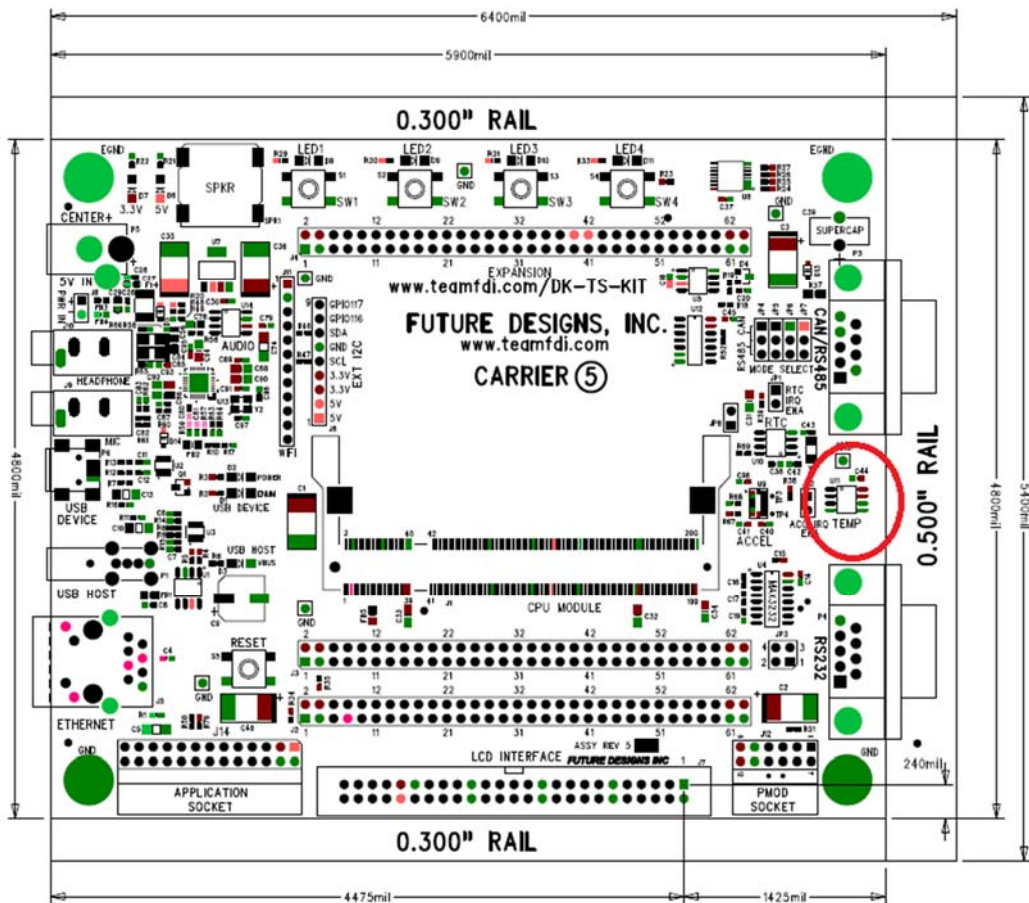

4.0 What's Next?

4.1 Blinky Demo

The Blinky Demo is currently under development. It will provide instructions for a sample e² studio project that will allow the user to learn about the ISDE and make an LED on the board blink.



5.0 Support

5.1 Where to Get Help

Online technical support is available at <http://www.teamfdi.com/support/>

5.2 Useful Links

- Future Designs Inc. Forums: http://www.teamfdi.com/?post_type=forum
- SYG-S7G2-70C-MDK Product Page: <http://www.teamfdi.com/product-details/syg-s7g2-70c-mdk/>
- Renesas Synergy: <https://synergybeta.renesas.com/>
- SEGGER J-Link LITE: <https://www.segger.com/jlink-lite-cortexm.html>
- Renesas Forums: <http://www.renesasrulz.com/>
- 7-Zip: <http://www.7-zip.org>

