



# SMD Power Inductor CDEPI106




## Description

- Ferrite core construction.
- Magnetically shielded.
- L × W × H: 11.3 × 11.3 × 10.5 mm Max.
- Product weight: 3.6 g (Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

## Dimension - [mm]

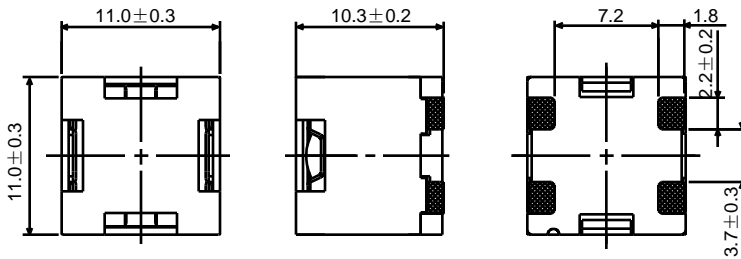

## Land pattern and Schematics - [mm]

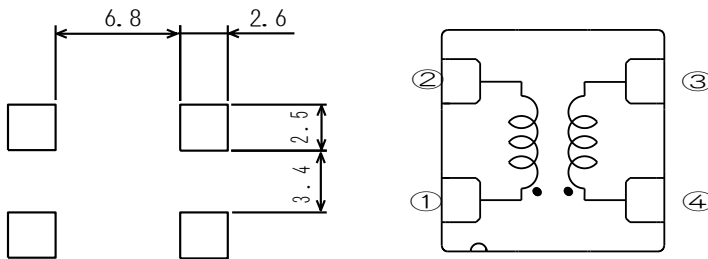

## Environmental Data

- Operating temperature range: -40°C ~ +105°C (including coil's self temperature rise)
- Storage temperature range: -40°C ~ +105°C
- Solder reflow temperature: 260 °C peak.

## Packaging

- Carrier tape and reel packaging
- 13.0" diameter reel
- 250pcs per reel

## Applications

- Ideally used in digital Amplifier in car audio, home theater and large LCD etc.

## Electrical Characteristics


PART NAME	STAMP	INDUCTANCE [WITHIN] ※1		D.C.R. (mΩ) [MAX.] (Typ.) (at 20°C)		THE SATURATION CURRENT (A) ※2		HEATING CURRENT (A) ※3
		BETWEEN 1-2	BETWEEN 4-3	BETWEEN 1-2	BETWEEN 4-3	(at 20°C)	(at 105°C)	
CDEPI106NP-100	100	10μH ± 25%	10μH ± 25%	28.8(23.0)	28.8(23.0)	4.9	4.5	4.0
CDEPI106NP-150	150	15μH ± 25%	15μH ± 25%	28.8(23.0)	28.8(23.0)	3.5	3.0	4.0
CDEPI106NP-220	220	22μH ± 30%	22μH ± 30%	28.8(23.0)	28.8(23.0)	2.2	1.9	4.0

※1. Measuring condition: at 100kHz.

※2. Saturation current: The value of D.C. current when the inductance decreases to 75% of it's nominal value.

※3. Heating current: The value of D.C. current when the temperature rise is  $\Delta t = 40^\circ\text{C}$  ( $T_a = 20^\circ\text{C}$ ).


# SMD Power Inductor CDEPI106

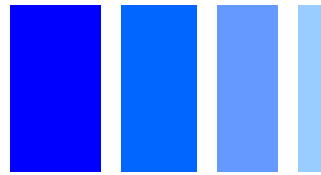


## Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) —  $\Delta T$


1. CDEPI106NP-100

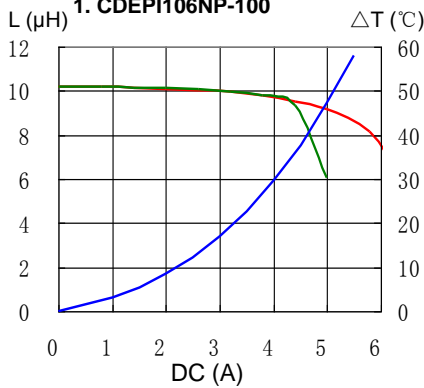

2. CDEPI106NP-150

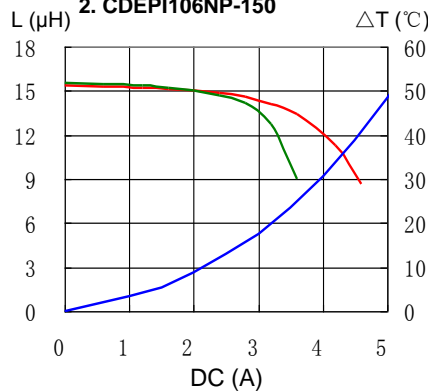


3. CDEPI106NP-220

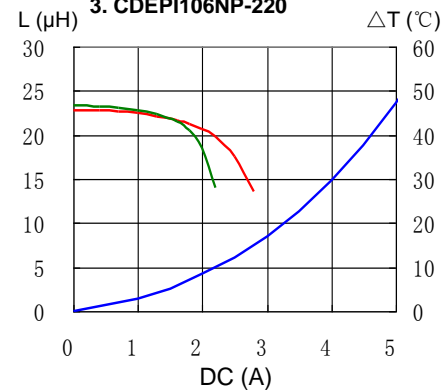


## Solder Reflow Condition

Heat Endurance

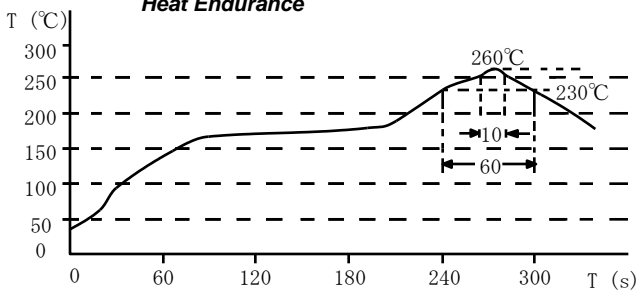

Temperature Chart

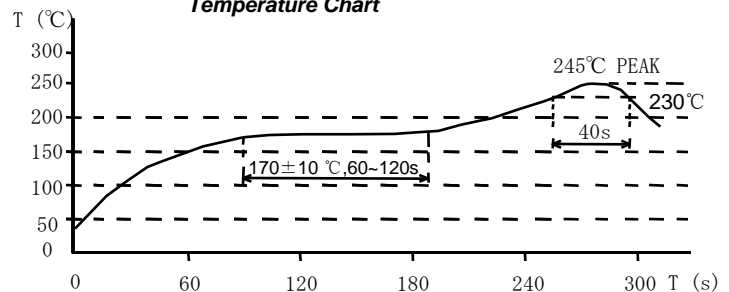

Please refer to the sales offices on our website - <http://www.sumida.com>

### Hong Kong

Tel.+852-2880-6781  
FAX.+852-2565-9600  
[sales@hk.sumida.com](mailto:sales@hk.sumida.com)

### Saitama(Japan)

Tel.+81-48-691-7300  
FAX.+81-48-691-7340  
[sales@jp.sumida.com](mailto:sales@jp.sumida.com)

### Chicago

Tel.+1-847-545-6700  
FAX. +1-847-545-6720  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

### Shanghai

Tel.+86-21-5836-3299  
FAX.+86-21-5836-3266  
[shanghai.sales@cn.sumida.com](mailto:shanghai.sales@cn.sumida.com)

### Seoul

Tel.+82-2-6237-0777  
FAX.+82-2-6237-0778  
[sales@kr.sumida.com](mailto:sales@kr.sumida.com)

### Obernzell

Tel.+49-8591-937-0  
FAX. +49-8591-937-103  
[contact@eu.sumida.com](mailto:contact@eu.sumida.com)

### Shenzhen

Tel.+86-755-8291-0228  
FAX.+86-755-8291-0338  
[shenzhen.sales@cn.sumida.com](mailto:shenzhen.sales@cn.sumida.com)

### Singapore

Tel.+65-6296-3388  
FAX.+65-6841-4426  
[sales@sg.sumida.com](mailto:sales@sg.sumida.com)

### Neumarkt

Tel.+49-9181-4509-110  
FAX. +49-9181-4509-310  
[infocomp@eu.sumida.com](mailto:infocomp@eu.sumida.com)

### Taipei

Tel.+886-2-8751-2737  
FAX.+886-2-8751-2738  
[sales@tw.sumida.com](mailto:sales@tw.sumida.com)

### San Jose

Tel.+1-408-321-9660  
FAX.+1-408-321-9308  
[sales@us.sumida.com](mailto:sales@us.sumida.com)