



| ■ Specifications                   |  |
|------------------------------------|--|
| <b>Input Voltage</b>               | 110 ~ 240Vac                                   |
| <b>Input Frequency</b>             | 50/60Hz  |
| <b>Input Current</b>               | 1A Max any input voltage                       |
| <b>Inrush Current</b>              | 115V/30A, 230V/50A @25°C                       |
| <b>Leakage Current</b>             | 0.25mA Max @ 240Vac                            |
| <b>Operating Temperature</b>       | 0 ~ 40°C<br>Under full load & normal operation |
| <b>Safety &amp; EMI</b>            | ETL1310, EN61558<br>Meets FCC Part15 Class B   |
| <b>Over Current Protection</b>     | 2A @ 100 ~ 240Vac                              |
| <b>Short Circuit Protection</b>    | Present - Self-Recovery                        |
| <b>Reverse Polarity Protection</b> | Present - Self-Recovery                        |

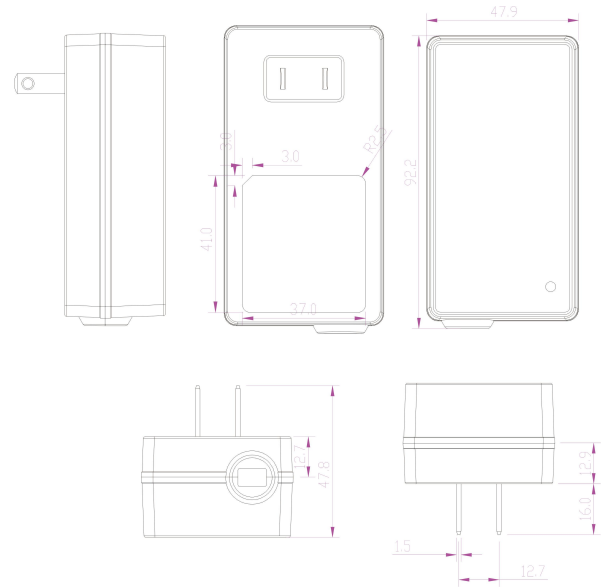


unit:mm

| ■ Output Characteristics  |           |
|---------------------------|-----------|
| <b>Voltage</b>            | 14.5V Max |
| <b>Min. Load</b>          | 0A        |
| <b>Rated Load</b>         | 1.8A      |
| <b>Voltage Regulation</b> | ±3%       |

# Sealed Lead Acid Battery Charger

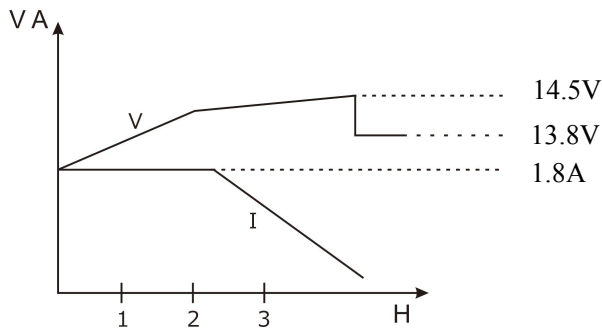



**Class 2 Battery Charger**  
PN:PCCG-SLA12V1800  
MODEL:CH0351-1200180U  
INPUT:100-240V~50/60Hz 1.0A(max)  
OUTPUT:12V= 1800mA


 **Conforms to UL Std.1310**  
**Certified to CSA Std C22.2 No.223**

**Intertek**  
5003982

black (-)  
red (+)

Made in China YYMM

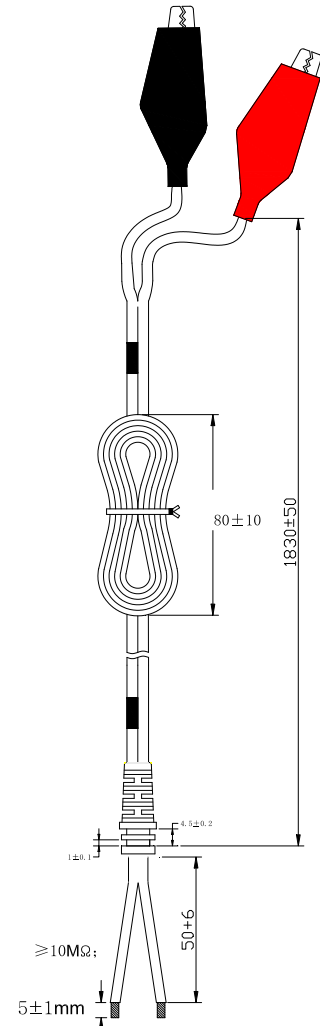

## ■ Handling Precautions

- Don't immerse in water or allow it to get wet!
- Don't reverse the positive and negative polarity!
- Don't short-circuit the charger with wire or other metal objects!
- Don't disassemble the charger in any way!