


1. Wiring Diagram.

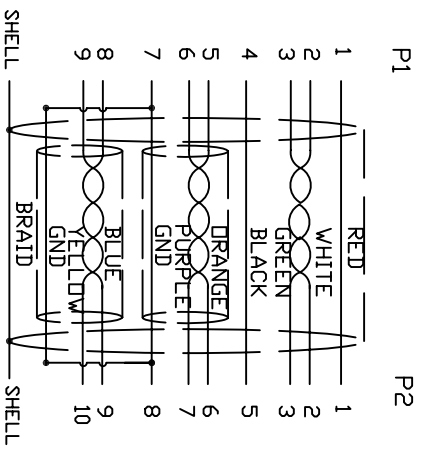

2. Cable test condition :

- Open / Short : 100%
- Insulation resistance : 5M ohms
- Contact resistance : 2 ohm
- Hipot : DC 300V / 1 sec

3. Each pcs with PE palybag

6	CORE	RH14.2*28.5*6.35mm	2	
5	CONN	USB3.0 MICRO B MALE G/F BLACK	1	P2
4	PVC	45P PVC BLACK OVERMOLD	25g	
3	PE	LLDPE 500026 6201	16g	
2	CONN	USB3.0 A/M G/F BLUE	1	P1
1	CABLE	《28AWG (7/0.127T) *IP+D(7/0.127T)+AL+M》*2+28AWG (7/0.127T) *IP+24AWG(7/0.2T)*2C+A+D+B (11/6/0.12AM) OD5.5 BLACK	1	2000mm
NO.	PART NO.	DESCRIPTION		
BILL OF MATERIAL				

A	2015125	INITIAL RELEASE	2015/11/24
REV	ECN#	DESCRIPTION	DATE
Cnc Tech, LLC			
DRAWN	EDWIN LAI	DATE	11/24/15
CHECKED	WENG	DATE	11/24/15
APPROVAL			
TITLE		USB3.0 A/M-MICRO B W/FERRITES,2M	
DWN NO.		103-1092-BL-F0200	
CUSTOMER P./N:			
CUSTOMER:			
SHEET		1 OF 1	