



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED. © COPYRIGHT 1989

LOC	DIST	P	F	ZONE	LTR	REVISIONS	DESCRIPTION	DATE	APPD
G	14					E	REVISED & REDRAWN PER 0720-0303-93	7-26-93	BB

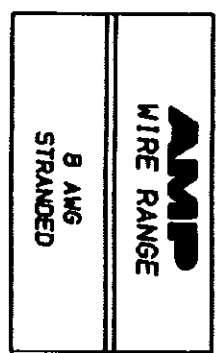

**METRIC**  
DIMENSIONS LISTED IN mm [ INCHES ]

NOTE: 1. WIRE INSULATION DIA 6.48 [ 2.55 ] MAX

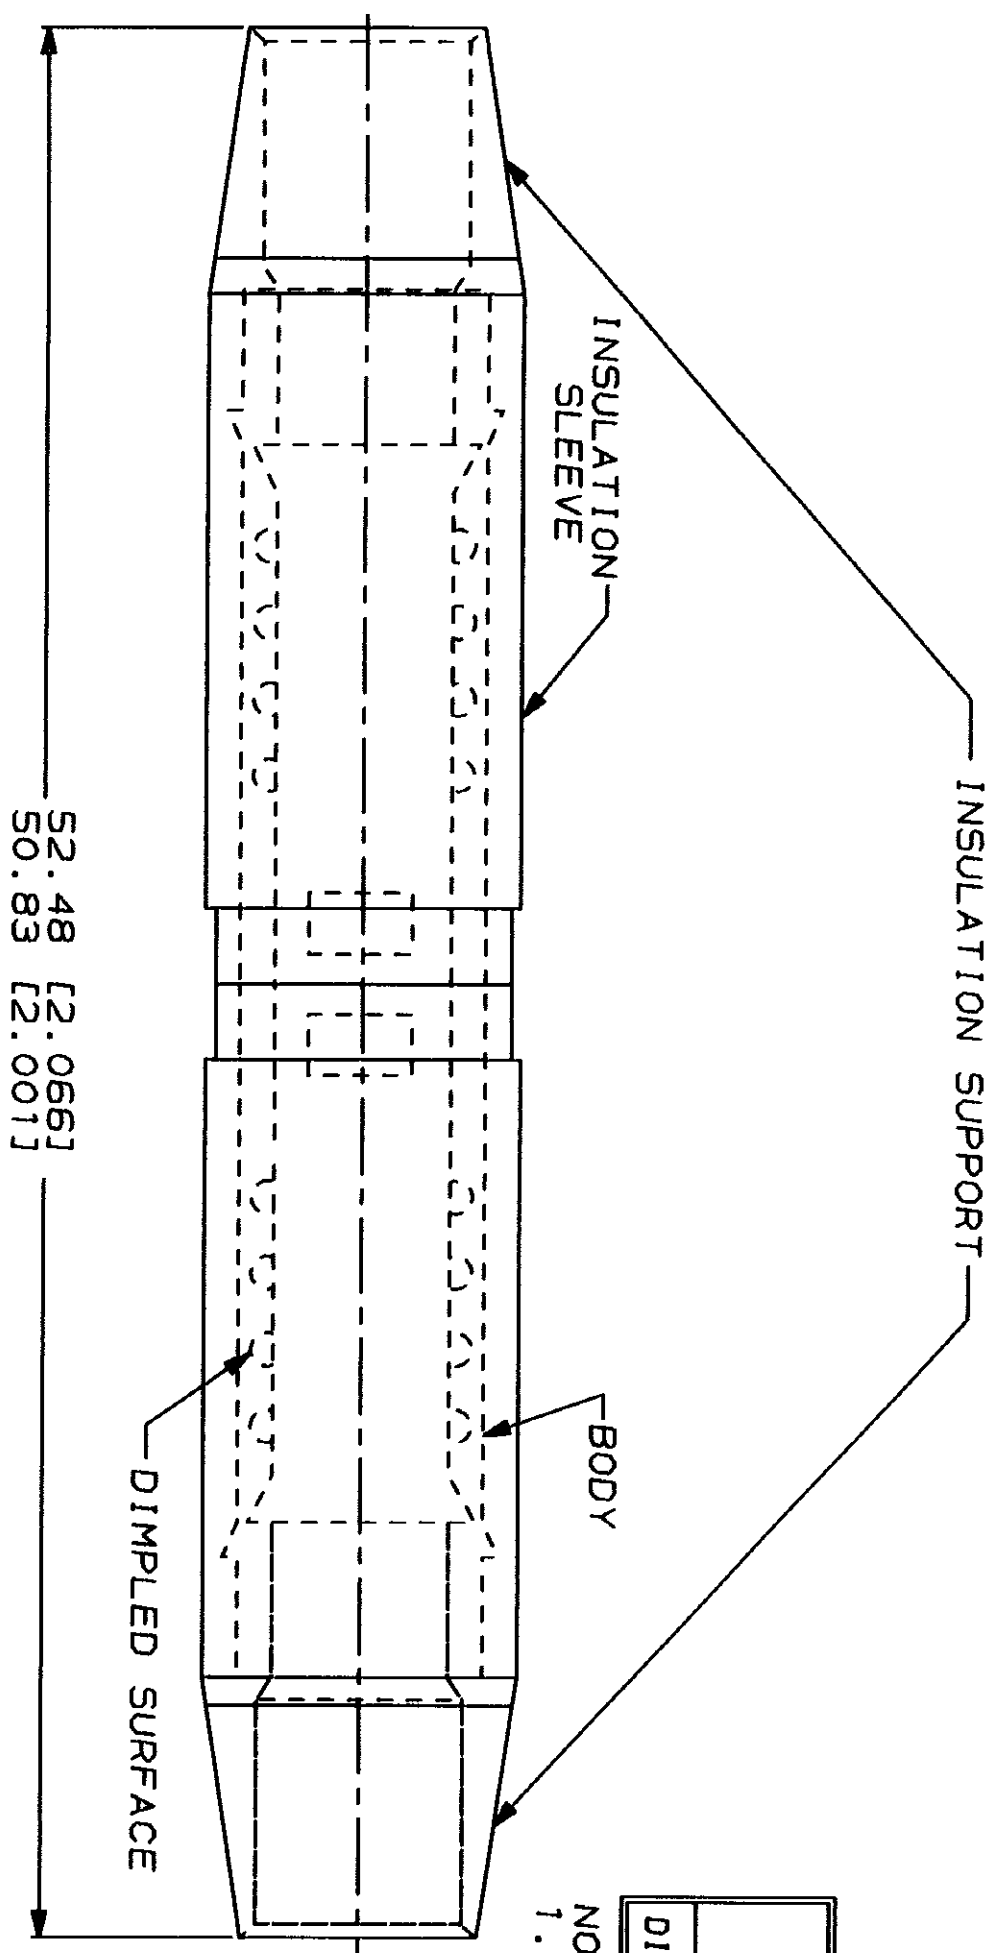

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 105°C		DO NOT SCALE PRINT. UNLESS SPECIFIED		DR 7-26-93 S.S. BOLDEN		QTY 100		LOOSE PC		324625	
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS		PRODUCT INFORMATION CENTER 1-800-522-6752		VOLTAGE RATING: 600 V MAX		TOLERANCES ON: 2 P.L.C DEC # 0.20 (0.008) 3 P.L.C DEC # -		CHK 7-26-93 R. HERSEY		AMP		AMP Incorporated Harrisburg, PA 17105-3608	
FOR APPLICATION		TOOLING ASSISTANCE CENTER 1-800-722-1111		CIRCULAR MIL AREA: 5.64-10.54mm² [13,100-20,800] STRANDED		MATERIAL COPPER PER ASTM B-152 MIL-DTL. COLOR-RED		APPD 7-26-93 B. BAUE		NAME		SPLICE, BUTT, SINGLE TO SINGLE, TERMINAL, WIRE SIZE: 8 AWG	
TOOLING INFORMATION		1-800-526-5142		FINISH TIN PLATE PER MIL-T-10727		PRODUCT SPEC		APPL. SPEC		SIZE B		CAGE CODE 00779	
FOR ORDER ENTRY		1-800-526-5142		THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		WEIGHT		SCALE		DRAWING NO 324625		SHEET 1 OF 1	

AMP 1470-15 REV 3-92 05 JAN 1994 17:01:37 AMP10744 <UJI28A>DEPT1132>AMP10744>U. TERMINAL-SPLICE-CUST CUSTOMER DRAWING