
| т | ם ا | п – | <u> </u> | 0 |
|---|--------|-----|----------|---|
| | | | | |





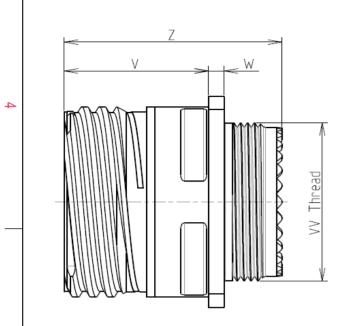

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 15

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Aluminium : Nickel -Shell Plating -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range -Salt Spray : 48 hours -Mass : 24.88 g ± 10%

8D 0

G

15

F

05

S

F

В

| Dim | Nominal |
|-----------|---------------|
| Р | 3.25±0.2 |
| PP | 4.39±0.2 |
| R1 | 24.61 |
| R2 | 23.01 |
| S | 31±0.3 |
| V | 20.83+0/-1.25 |
| W | 2.1/2.5 |
| Z | 31.5 Max |
| VV THREAD | M22x1-6g |


ORIENTATION : B

CONTACT LAYOUT : 15-05

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

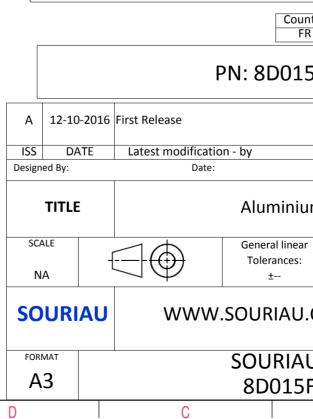

| σ | | A | | | | |
|---|---|---------------|--------|---|--|--|
| | | | | | | |
| | | | | 4 | | |
| | | | | 3 | | |
| S EXAMPLE | | | | | | |
| any non-conformi which does not co of the Parties or l dation, technical n | mply with by a third part otice.) | | | | | |
| Intry Juriso R | liction & Cont Not Listed | rol List | | 2 | | |
| .5F05SB | F05SB | | | | | |
| | | | | | | |
| | CUSTOME | R DRAWING | MOD N° | | | |
| um Receptacle 8D series | | | | | | |
| ar | | PROJECT 59 | | 1 | | |
| I.COM | COM This document is the property of SOURIAU it must not be reproduced or communicated without permission | | | | | |
| U DRG N° | 1 | | SHEET | | | |
| F05SB-C | | A | 1/2 | J | | |
| U | 1 | Γ | | | | |

| | <u>т</u> | ۵ | н г | m | D | 0 |
|----------|----------|--|------------|---|-----------------------------------|---|
| | | Contact Layout | | | | Panel Cuto |
| 4 | × | $ \begin{array}{c} $ | | | Å | SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING |
| | | X-axis (mm) Y-axis (mm) +.000 (0.00) +.100 (2.54) +.174 (4.42) +.024 (0.61) 094 (2.39) 148 (3.76) 174 (4.42) +.024 (0.61) | | | Σ | Ø |
| S | | | | | | Dim ØA ØAA R1 ØT |
| | | | | | | |
| | | | | | | SOURIAU shall not be liable for a due to a use of the Products v the Specifications issued by either (professional recommend |
| S | | | | | | |
| | | | | | | PN: 8D015 |
| | | | | | ISS DATE Designed By: TITLE | Date: |
| | | | | | SCALE | Aluminiu General linear Tolerances: |
| → | | | | | SOURIA | U WWW.SOURIAU. |
| | | | | | FORMAT A3 | SOURIAU 8D015F |
| | Н | G | F | E | D | C |

