



CONNECTOR ASSEMBLY  
EXEMPLARY LOADED

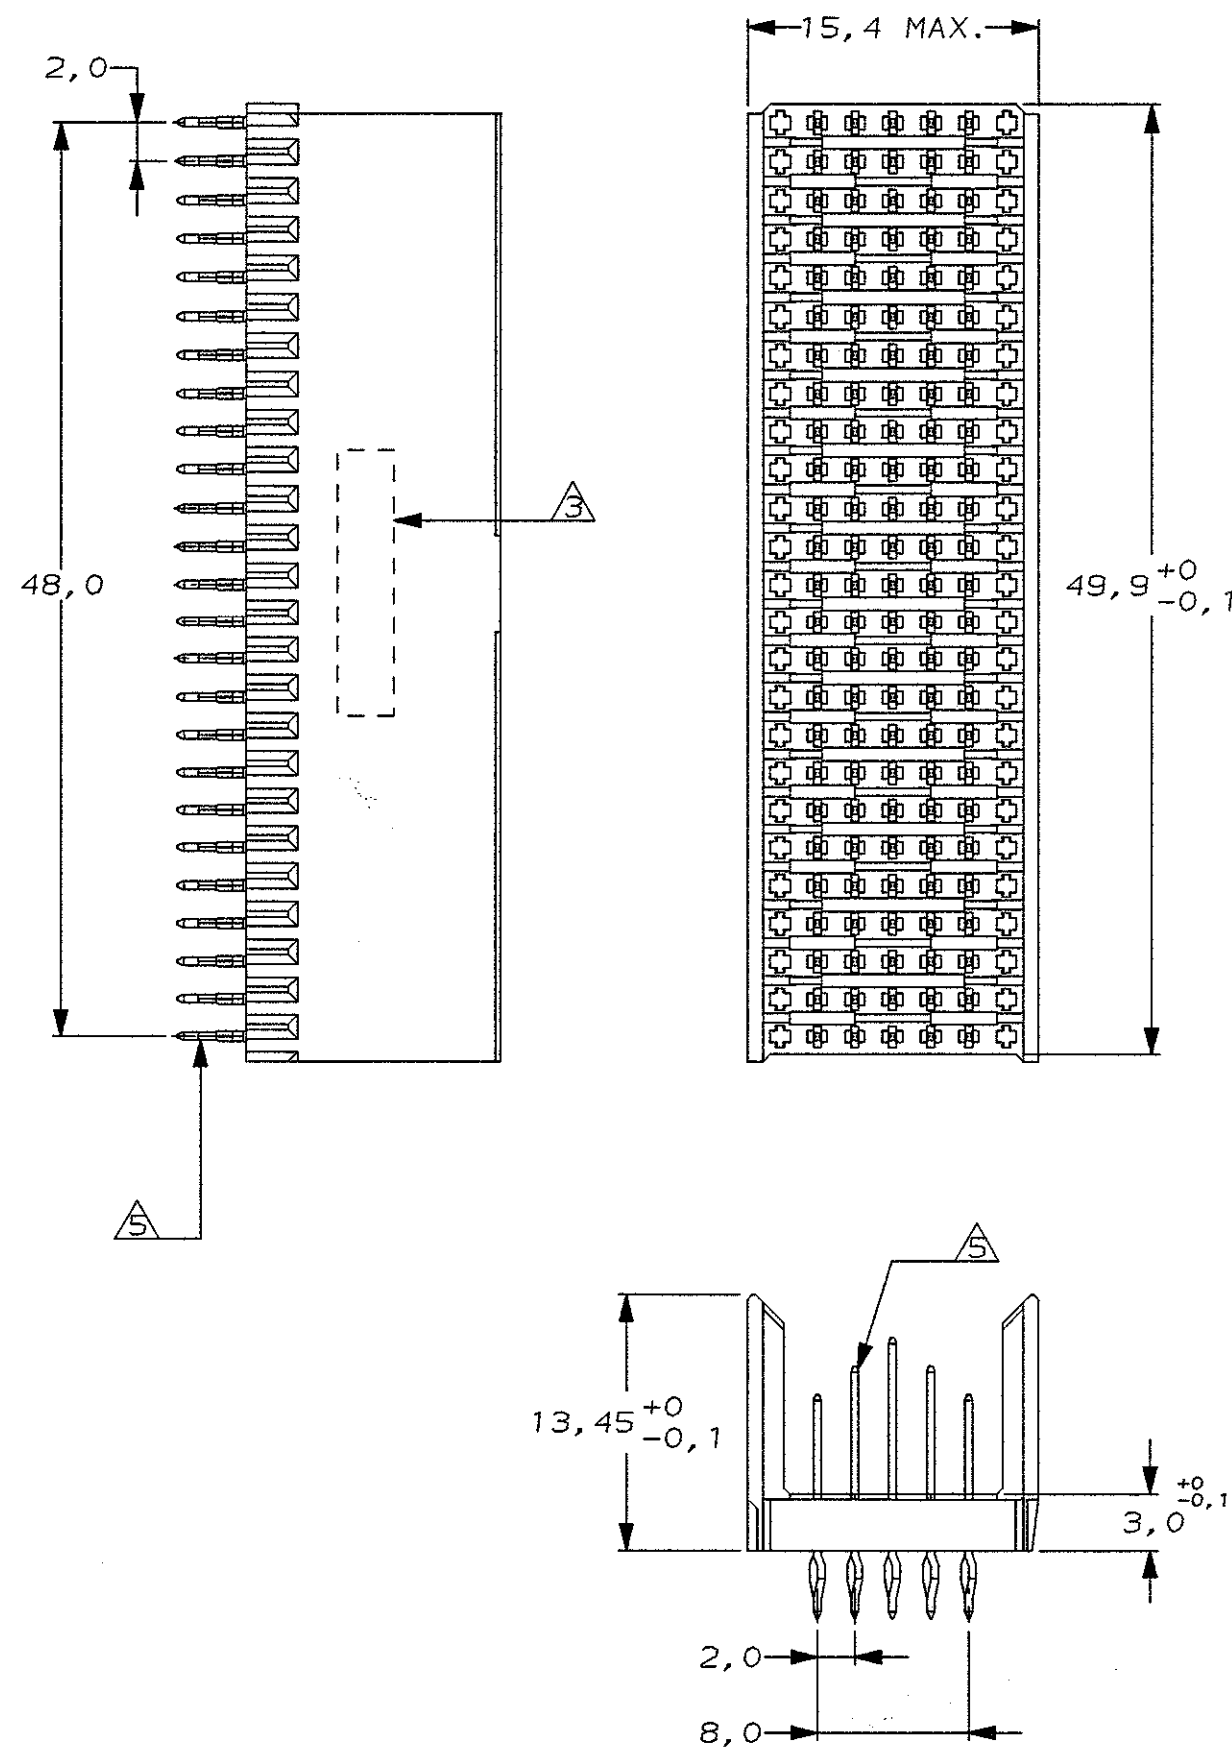

CONTACT DIMENSIONS

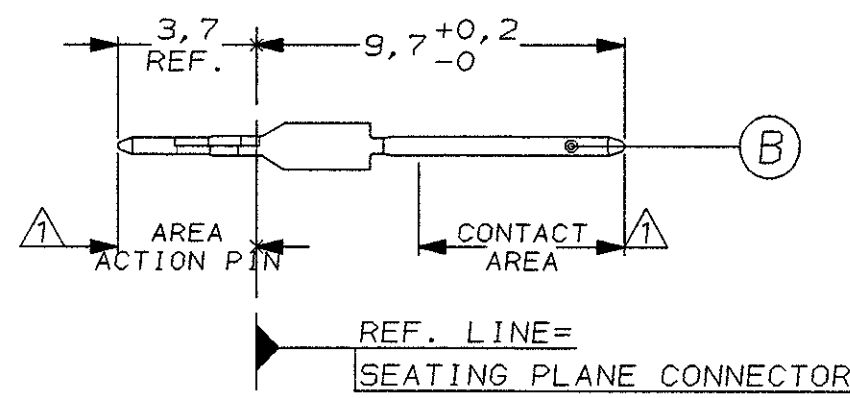

DO NOT SCALE  
DIMENSIONS IN mm

METRIC

THIRD ANGLE  
PROJECTION

CONTACT LAYOUT


	z	a	b	c	d	e	f
1			B		B		
2		B		B		B	
3			B		B		
4		B		B		B	
5			B		B		
6		B		B		B	
7			B		B		
8		B		B		B	
9			B		B		
10		B		B		B	
11			B		B		
12		B		B		B	
13			B		B		
14		B		B		B	
15			B		B		
16		B		B		B	
17			B		B		
18		B		B		B	
19			B		B		
20		B		B		B	
21			B		B		
22		B		B		B	
23			B		B		
24		B		B		B	
25			B		B		

THIS DRAWING IS  
PRELIMINARY

NOTES:

- ① PLATING  
CONTACT AREA: 0,8µm Au MIN. OVER 1,3µm Ni MIN.  
ACTION PIN : 0,5µm SnPb MIN. OVER 1,3µm Ni MIN.
- ② MATERIAL CONTACT: PHOSPHORBRONZE.  
MATERIAL HOUSING: GLASSFILLED POLYESTER.
- ③ CONNECTOR PRINTED WITH PARTNUMBER AND DATECODE.
- ④ PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID.  
TOTAL 62 HOLES.
- ⑤ FOR ACTUAL PIN LOADING SEE "CONTACT LAYOUT"
- ⑥ CONNECTOR ASSEMBLY LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE : TR-NWT-001217 ISSUE 1, SEPT 1992.

RECOMMENDED PCB-HOLE LAY-OUT  
COMPONENT SIDE SHOWN

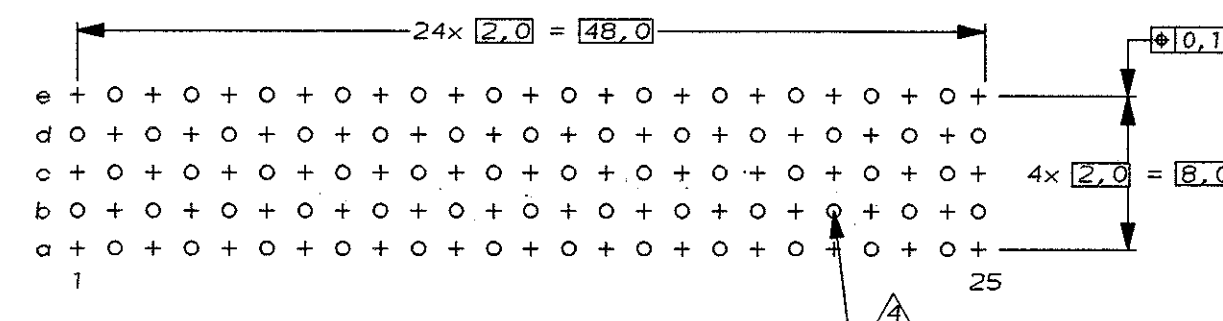

P.C.B. HOLE DIM. ACTION PIN

DRILLED HOLE:	0,7±0,025mm
FIN. HOLE :	0,55 TO 0,65mm
Cu-thks :	0,025 TO 0,050mm
SnPb-thks :	0,004 TO 0,010mm

①	②	188667-9
①	②	188667-1
FINISH	MATERIAL	PARTNUMBER
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
0	EH-0590-95	ED BM 12.05.95
LTR.	REVISION RECORD	DR. CHK. DATE
DR. :	E. DERKS	CHK. : B. MOOIJ
DATE:	12.05.95	DATE: 12-5-95
APP. :	-	DATE: -
DWG.No.	C-188667	REV.LTR.
0	1 OF 1	A2