
	т (п		0			
ØS-						
			LAYOUT SHOWN AS EXAM			
	Keying Shown as example					
CHARACTERISTICS	Connector dimension Dim Nominal	7				
	ØS 44.9 Max	┫	CONDIALISES Harden Harden			
-Shell Plating : Nickel	Z 31 Max VV THREAD M34x1-6g	-	SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with			
-Insulator : Thermoplastic		-	the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)			
-Contacts : Copper Alloy			נטוטונאסטער אראטאראראראראראראראראראראראראראראראראר			
-Seals & Grommet : Silicon Elastomer			Country	Jurisdiction & Control List	]	
-Contact Plating : Gold over copper Alloy 0.8µm minimum		[	FR Not Listed			
-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories			PN: 8D523F21BC			
-Temperature Range : -65°C to +200°C -Salt Spray : 48 hours		A 06-10-201	6 First Release			
Mass : 73.74 g ± 10%		ISS DATE	Latest modification - by		MOD N°	
		Designed By:	Date:	CUSTOMER DRAWING		
		TITLE	Aluminium Plug 8D series			
BASIC SERIES: 8D 5 - 23 F	21 B C	SCALE	General linear	NPRDS / PROJECT		
		NA	-[ (	859		
SHELL TYPE : Plug with RFI Shielding				This document is the pro	perty of	
CONTACT TYPE : Standard Crimp Contact			SOURIAU WWW.SOURIAU.COM SOURIAU it must not be reproduced or			
SHELL SIZE : 23	CONTACT TYPE : SOCKET(		communicated without permission			
	CONTACTIA	OUT : 23-21	SOURIAU D	RG N°	SHEET	
PLATING : F = Nickel		A3	8D523F21		1/2	

r	<b></b>	۵	п П	m	D	0
		Contact Layout				
4	_	$\begin{array}{c} & & \\$				
	Contact position ID A +.128 (3.25) B +.289 (7.34)	Y-axis (mm)         Contact position ID         X-axis (mm)         Y-axis           + 385 (9 78)         M         - 289 (7 34)         + 285 (7 24)				
ω	C +386 (9.80) D +400 (10.16) E +328 (8.33) F +.183 (4.65) G +.000 (0.00) H183 (4.65) J -328 (8.33) K -400 (10.16) L386 (9.80) Shell size no. con	+.285 (7.24)         N        128 (3.25)         +.385 (9.78)           +.123 (3.12)         P         +.000 (0.00)         +.246 (6.22)          065 (1.65)         R         +.160 (4.06)         +.146 (3.71)          239 (6.07)         S         +.214 (5.44)        035 (1.89)          362 (9.19)         T         +.094 (2.39)        194 (4.93)          362 (9.19)         V        214 (5.44)        035 (0.89)          239 (6.07)         W        160 (4.06)         +.146 (3.71)          239 (6.07)         V        214 (5.44)        035 (0.89)          239 (6.07)         V        160 (4.06)         +.146 (3.71)          055 (1.65)         X         +.000 (0.00)         +.000 (0.00)           +.123 (3.12)              ber of         Size         Service         Contact         Supersedi           tacts         cantacts         rating         MS20056-1         MS20056-1				
	F					
	-					SOURIAU shall not be liable for a due to a use of the Products v the Specifications issued by either (professional recommend
N						
					A 06-10-20 ISS DATE Designed By:	PN: 8D523
					TITLE	Alumi
					SCALE NA	General linear Tolerances: ±
					FORMAT	U WWW.SOURIAU. SOURIAU
		1			A3	8D523F
	Н	G	F F	E	D	C

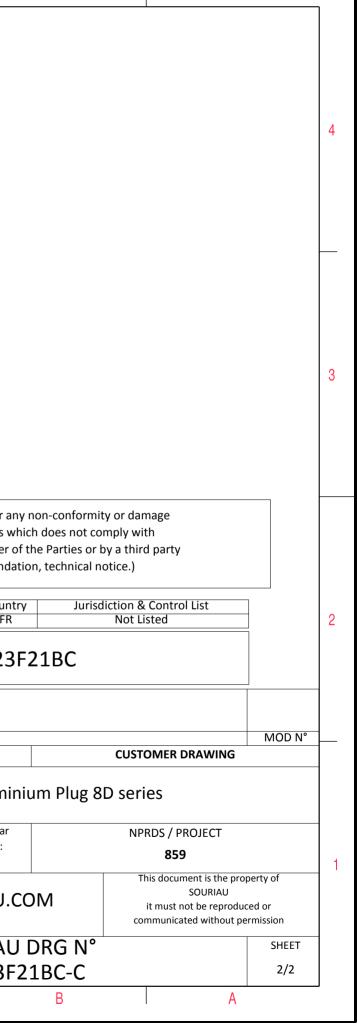

 $\triangleright$ 

σ