

PCB terminal block - FKDSO 2,5 HV/3-L 7,5 GY7035 - 2201128


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



PCB terminal block, Nominal current: 24 A, Nom. voltage: 630 V, Pitch: 7.5 mm, Number of positions: 3, Connection method: Push-in spring connection, Mounting: Wave soldering, Article with lateral pin exit

Why buy this product

- Spring-cage PCB terminal block for ME/ME MAX electronics housing
- Push-in Technology simplifies connection

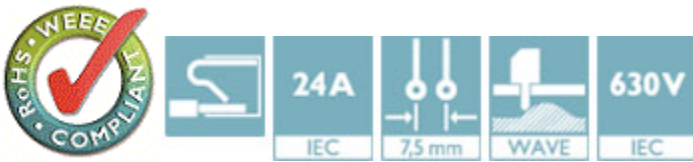

Key Commercial Data

| | |
|------------------------|----------|
| Packing unit | 1 STK |
| Minimum order quantity | 50 STK |
| Custom tariff number | 85369010 |
| Country of origin | Germany |

Technical data

| | |
|---------------------|---------------------------------------|
| Product type | Printed circuit board terminal |
| Approval | UL Recognized |
| | cUL Recognized |
| | VDE report with production monitoring |
| | CCA |
| | IECEE CB Scheme |
| | EAC |
| Rated voltage (IEC) | 630 |
| Rated current (IEC) | 24 |
| Mounting type | Wave soldering |
| Number of positions | 3 |


PCB terminal block - FKDSO 2,5 HV/3-L 7,5 GY7035 - 2201128

Technical data


| | |
|--------------------------|---------------------------|
| Pitch | 7.5 mm |
| Levels | single-level |
| Connection method | Push-in spring connection |
| Connection cross section | 2.5 |

Drawings

Drilling diagram



Diagram

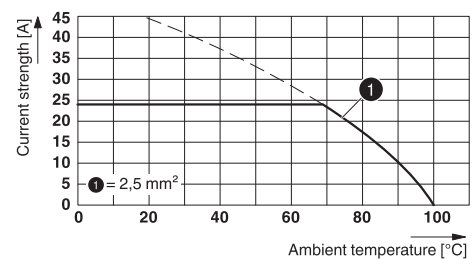

Type: FKDSO 2,5 HV/...-L(R) 7,5 ...

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27180401 |
| eCl@ss 4.1 | 27180401 |
| eCl@ss 5.0 | 27180506 |
| eCl@ss 5.1 | 27141190 |
| eCl@ss 6.0 | 27261101 |
| eCl@ss 7.0 | 27440401 |
| eCl@ss 8.0 | 27440401 |
| eCl@ss 9.0 | 27440401 |

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC001031 |
| ETIM 4.0 | EC001031 |
| ETIM 5.0 | EC002643 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 31261501 |
| UNSPSC 7.0901 | 31261501 |
| UNSPSC 11 | 31261501 |
| UNSPSC 12.01 | 31261501 |

PCB terminal block - FKDSO 2,5 HV/3-L 7,5 GY7035 - 2201128

Classifications

UNSPSC

| | |
|-------------|----------|
| UNSPSC 13.2 | 31261501 |
|-------------|----------|

Approvals


Approvals

Approvals


UL Recognized / cUL Recognized / VDE Gutachten mit Fertigungsüberwachung / CCA / IECCE CB Scheme / EAC

Ex Approvals

Approval details

| |
|---|
| UL Recognized  http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm FILE E60425 |
|---|


| |
|--|
| cUL Recognized  http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm FILE E60425 |
|--|

| | |
|--|---------|
| VDE Gutachten mit Fertigungsüberwachung  http://www.vde.de 40033478 | |
| mm ² /AWG/kcmil | 0.2-2.5 |
| Nominal current I _N | 24 A |
| Nominal voltage U _N | 750 V |

| | |
|--------------------------------|---------|
| CCA CCA/ DE1 34257 | |
| mm ² /AWG/kcmil | 0.2-2.5 |
| Nominal current I _N | 24 A |
| Nominal voltage U _N | 750 V |

PCB terminal block - FKDSO 2,5 HV/3-L 7,5 GY7035 - 2201128

Approvals

| | |
|---|---------|
| IECEE CB Scheme  http://www.iecee.org/ DE1-52051 | |
| mm ² /AWG/kcmil | 0.2-2.5 |
| Nominal current I _N | 24 A |
| Nominal voltage U _N | 750 V |

| |
|-------------|
| EAC B.01742 |
|-------------|