
	ſ	I G I I M		0	₿		7
CARACTERSIES Setads of tilbade of ML-07L-38999 series till Setads & Grommet Setads &	4						4
CHARCTENSTCS Standard: Based on ML-DT. 38999 Series III. Schell Material :: Aluminium Schell Material :: Aluminium Schell Material :: Aluminium Schell Material :: Schell Schell on dirabation: Schell Material :: Contact Hairing :: Colloger Alloy Objum minimum Schell Material :: Schell Schell on Classione: Outract Hairing :: Colloger Alloy Objum minimum Schell Material :: Schell Schell Schell Schell :: Sc	ω			LAYOUT SHOWN AS EXA	MPLE		3
CHARCTENSTCS Standard: Based on ML-DT. 38999 Series III. Schell Material :: Aluminium Schell Material :: Aluminium Schell Material :: Aluminium Schell Material :: Schell Schell on dirabation: Schell Material :: Contact Hairing :: Colloger Alloy Objum minimum Schell Material :: Schell Schell on Classione: Outract Hairing :: Colloger Alloy Objum minimum Schell Material :: Schell Schell Schell Schell :: Sc		Koving Shown as oxample					
Standard : Based on ML DTL 38999 Series III Commentation in the standard is associated on the fractions is such by the control of the fraction is such by the control of the fractions is such by the control of the fraction is such by the control of t							
Shell Material : Aluminium Shell Plating : Olive drab Cadmium Insulator Shell Plating : Olive drab Cadmium Insulator Shell Plating : Gold over copper Alloy 0 Sum minimum Dorator Plating : Gold over copper Alloy 0 Sum minimum Derivered with Souriau contacts and Accessories Interpretative Range : 65°C to +175°C Sait Spray : 500 hours Mass : 14.83 g ± 10% Mod N ⁴ Shell Stress Shell Stress Interpretative Range : 65°C to +175°C Sait Spray : 500 hours Mass : 14.83 g ± 10% Mod N ⁴ Shell Stress Souriau ORIENTATION : E CONTACT TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact Shell Stress Souriau ORIENTATION : E CONTACT TYPE : Standard Crimp Contact Shell Stress Souriau CONTACT TYPE : Plug with RFI Shielding PLATING : W = Olive drab Cadmium CONTACT LAYOUT : 11.05		connector unitension					
No -Contact Plating ::::::::::::::::::::::::::::::::::::		Shell Material Aluminium -Shell Material : Aluminium -Shell Plating : Olive drab Cadmium -Shell Plating : Olive drab Cadmium -Insulator : Thermoplastic					
-Durability : 500 Mating voles -Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +175°C -Sait Spray : 500 hours -Mass : 14.83 g ± 10% BASIC SERIES: 8D 5 11 W 05 P E SHELL TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact SHELL SZE : 11 PLATING : W = Olive drab Cadmium PLATING : W = Olive drab Cadmium PLATING : W = Olive drab Cadmium -Derive drab Cadmium -	N			Country FR]	2
-Salt Spray : 500 hours -Mass : 14.83 g ± 10% BASIC SERIES: 8D 5 - 11 W 05 P E SHELL TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 11 PLATING : W = Olive drab Cadmium CONTACT TYPE : Dive drab Cadmium CONTACT TYPE : Dive drab Cadmium CONTACT TYPE : Dive drab Cadmium SOURIAU CONTACT TYPE : Dive drab Cadmium CONTACT TYPE : Standard Crimp Contact SOURIAU CONTACT TYPE : Standard Crimp Contact SOURIAU CONTACT TYPE : Dive drab Cadmium CONTACT TYPE : Standard Crimp Contact SOURIAU CONTACT TYPE : Standard Crimp Contact SOURIAU SOURIAU CONTACT TYPE : Standard Crimp Contact SOURIAU CONTACT TYPE : Standard Crimp Contact SOURIAU CONTACT TYPE : Standard Crimp Contact SOURIAU SOURIAU CONTACT TYPE : Standard Crimp Contact SOURIAU CONTACT TYPE : Standard Crimp Contact SOURIAU CONTACT TYPE : Standard Crimp Contact SOURIAU CONTACT TYPE : Standard Crimp Contact SOURIAU SOURIAU CONTACT TYPE : Standard Crimp Contact SOURIAU CONTACT TYPE : Standard Crimp Contact SOURI		-Durability : 500 Mating cycles					
-Salt Spray : 500 hours -Mass : 14.83 g ± 10% -Mass : 14.83 g ± 10% -MoD N* 			A 17-10-2016	First Release			_
BASIC SERIES: 8D 5 11 W 05 P E E CUSTOMER DRAWING BASIC SERIES: 8D 5 - 11 W 05 P E E Aluminium Plug 8D series SHELL TYPE : Plug with RFI Shielding - 11 W 05 P E SCALE General linear NPRDS / PROJECT CONTACT TYPE : Standard Crimp Contact ORIENTATION : E SOURIAU WWW.SOURIAU.COM This document is the property of SOURIAU SHELL SIZE : 11 CONTACT TYPE : PIN(500 Matings) CONTACT TYPE : PIN(500 Matings) WWW.SOURIAU.COM This document is the property of SOURIAU PLATING : W = Olive drab Cadmium CONTACT TYPE : PIN(500 Matings) FORMAT SOURIAU DRG N° SHEET						MOD N°	
BASIC SERIES: 8D 5 - 11 W 05 P E SCALE SCALE NPRDS / PROJECT 859 SHELL TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact ORIENTATION : E NA Image: Contact is the property of SOURIAU SOURIAU SOURIAU This document is the property of SOURIAU SHELL SIZE : 11 E CONTACT TYPE : PIN(500 Matings) CONTACT LAYOUT : 11-05 CONTACT LAYOUT : 11-05 FORMAT SOURIAU DRG N° SHEET					CUSTOMER DRAWING		_
BASIC SERVES. ab 3 - 11 W 03 P E Tolerances: Tolerances: 859 SHELL TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact ORIENTATION : E NA - - 859 SHELL SIZE : 11 CONTACT TYPE : PlN(500 Matings) CONTACT TYPE : PIN(500 Matings) This document is the property of SOURIAU.COM SOURIAU Na -			TITLE	Aluminiu	ım Plug 8D series		
CONTACT TYPE : Standard Crimp Contact ORIENTATION : E SHELL SIZE : 11 CONTACT TYPE : PIN(500 Matings) PLATING : W = Olive drab Cadmium CONTACT LAYOUT : 11-05 FORMAT SOURIAU This document is the property of SOURIAU.COM BOURIAU WWW.SOURIAU.COM This document is the property of SOURIAU.COM	_ _		-	Tolerances:			-
SHELL SIZE : 11 CONTACT TYPE : PIN(500 Matings) communicated without permission PLATING : W = Olive drab Cadmium CONTACT LAYOUT : 11-05 FORMAT SOURIAU DRG N° SHEET			SOURIAU	WWW.SOURIAU.CO	SOURIAU		
		SHELL SIZE : 11 CONTACT TYPE : PIN(500 Matings		communicated without per			
A3 8D511W05PE-C 1/2		PLATING : W = Olive drab Cadmium CONTACT LAYOUT : 11-05					1
			A3	8D511W0	5PE-C	1/2	

	т	G	וד	m		0	
		Contact Layout					
4	-X	$ \begin{array}{c} & & \\ & & \\ & \\ & \\ & \\ & \\ & \\ & \\ & $					
	Shell Arrangement Numb size no.	X-axis (mm) Y-axis (mm) +065 (1.55) +.056 (1.42) +.113 (2.87) 065 (1.65) +.000 (0.00) 130 (3.30) 113 (2.87) 065 (1.65) 065 (1.65) +.056 (1.42) 065 (1.65) 065 (1.65) 065 (1.65) 065 (1.42) 065 (1.65) 065 (1.42)					
ω							
	\vdash					SOURIAU shall not be liab due to a use of the Pro	
N						the Specifications issued by (professional reco	y either c
					A 17-10-20	PN: 8D	0511\
					ISS DATE Designed By: TITLE	Date:	Alumir
-					SCALE NA	Gener	ral linear rances:
					SOURIA		
		1	1		FORMAT A3		IRIAL
	Н	G	F	E	D	C	

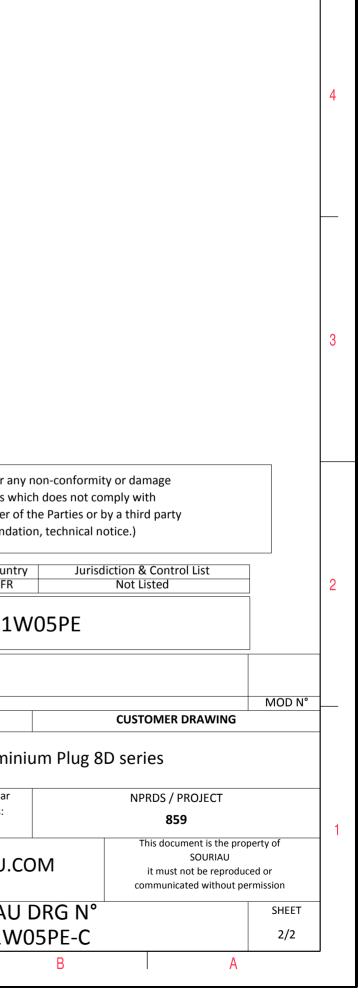

 \triangleright

σ