


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
BD	0	AB	REVISED PER ECO-09-015488	06JUL09	HMR	GS	

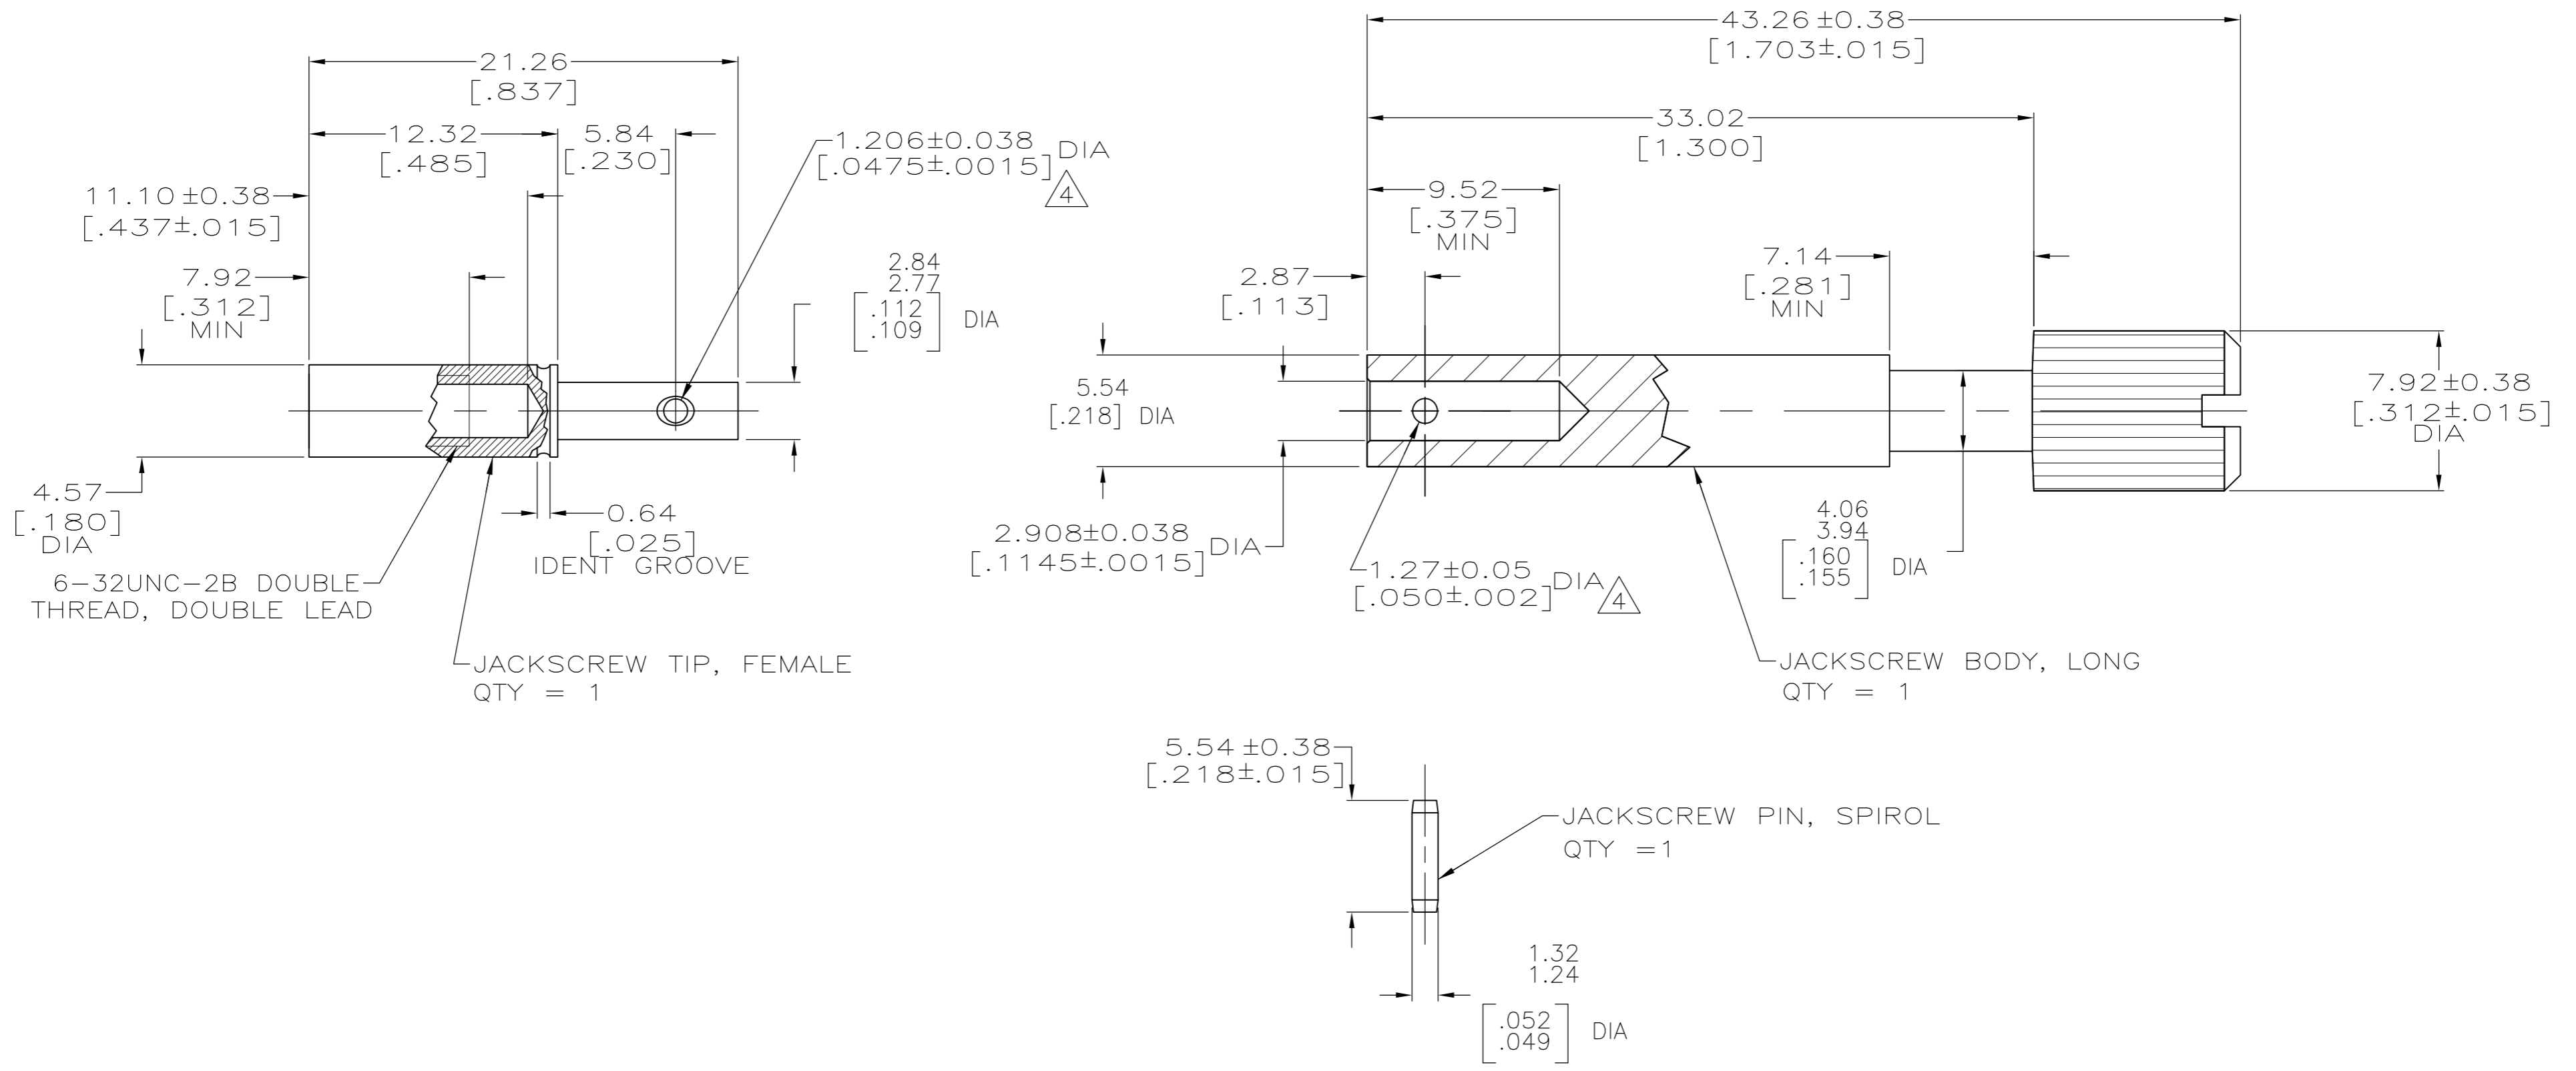

- 1 ZINC.
- 2 STAINLESS STEEL.
- 3 TO ASSEMBLE JACKSCREW REFER TO INSTRUCTION SHEET #1189.
- 4 HOLE CENTRALLY LOCATED WITHIN ±.007[.003] OF THE 5.54[.218] DIA AND THE 2.77/2.84 [.109/.112] DIA CENTER LINES.
- 5 CHROMATE CONVERSION, CLEAR.
- 6 NON-HEXAVALENT CHROMATE COATING ON JACKSCREW BODY.

6	1-200867-1
6	200867-1
NOTES	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	K.FOLTZ	05/19/94	Tyco Electronics Corporation Harrisburg, PA 17105-3608
DIMENSIONS: mm		CHK	R.STONE	06/16/94	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	-	-	NAME
0 PLC	± -	PRODUCT SPEC	-	-	JACKSCREW KIT, UNASSEMBLED, FEMALE, M SERIES
1 PLC	± -	APPLICATION SPEC	-	-	SIZE
2 PLC	± 0.13 [.005]	WEIGHT	-	-	A2
3 PLC	± -	CUSTOMER DRAWING	-	-	CAGE CODE
4 PLC	± -	SCALE	4:1	-	00779
ANGLES	± -	SHEET	1 OF 1	-	DRAWING NO
MATERIAL	JACKSCREW BODY: 1	RESTRICTED TO	-	-	C=200867
JACKSCREW TIP: 2	JACKSCREW PIN: PASSIVATED	REV	AB	-	