



101-00042-**

64 功能區鍍金1u",錫腳鍍亮純錫至少160u"
 65 功能區鍍金3u",錫腳鍍亮純錫至少160u"
 66 功能區鍍金5u",錫腳鍍亮純錫至少160u"
 67 功能區鍍金10u",錫腳鍍亮純錫至少160u"
 68 功能區鍍金15u",錫腳鍍亮純錫至少160u"

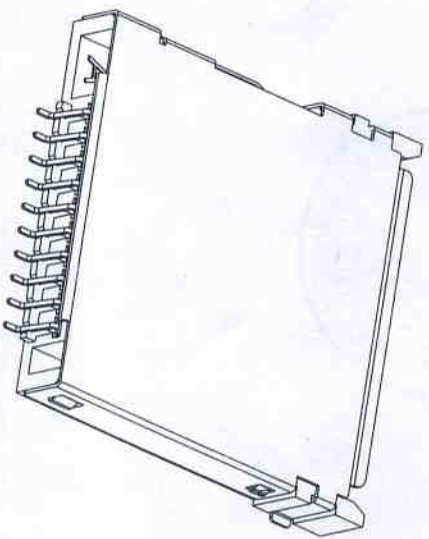

REV.	ECN/NO.	MODIFY CONTENT	DATE
B	ES.00503.205	公差變更	03/26/05
C	ES.00604.018	變更金一層式	2006/04/04
D	ES.00710.005	修改鍍金厚度	2007/10/24

- Notes:
1. All Dimensions are in Millimeters.
 2. Operation voltage: 100 VAC max.
 3. Current rating : 1 Amps max.
 4. Contact resistance: 100m ohms max.
 5. Insulation resistance: 1000M ohms min. 500 VDC
 6. Dielectric withstanding voltage: 500 VAC / 1minute
 7. Operating Temperature: -20。 C to +60。 C
 8. Storage Temperature: -40。 C to +70。 C

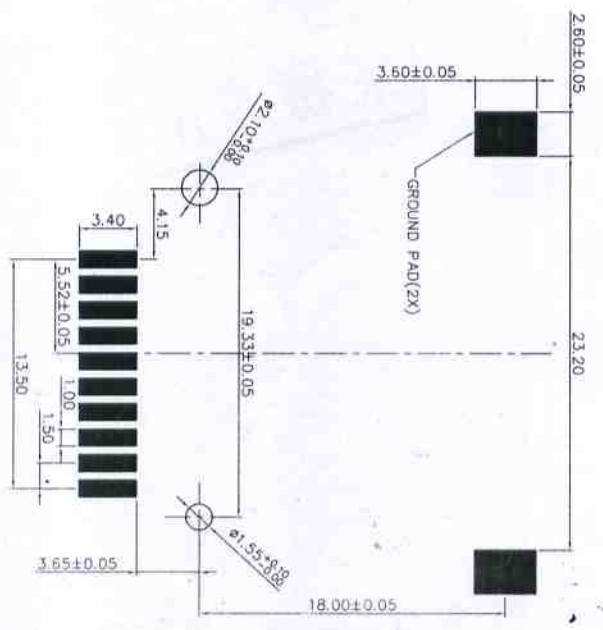

GENERAL TOLERANCE		FILE NO.	PART. NO.		DRAWN	MATERIAL	
X. ±0.50	X. ±5°	101-00042	101-00042-**		賀勝	DATE	SCALE
.X±0.38	.X ±1.2°	REV.	TITLE	CHECKED	楊森 10/26/05	2007/10/24	UNIT
.XX±0.25	.XX ±1°	SIZE	MS. Q. ANN. 全包裝下一體式	APPROVED	賀勝 10/21		MM
		A4	SHEET				

SM Shouh Min Industry (Shenzhen) CO., LTD