

1

2

3


4

5


6

7

2000±50

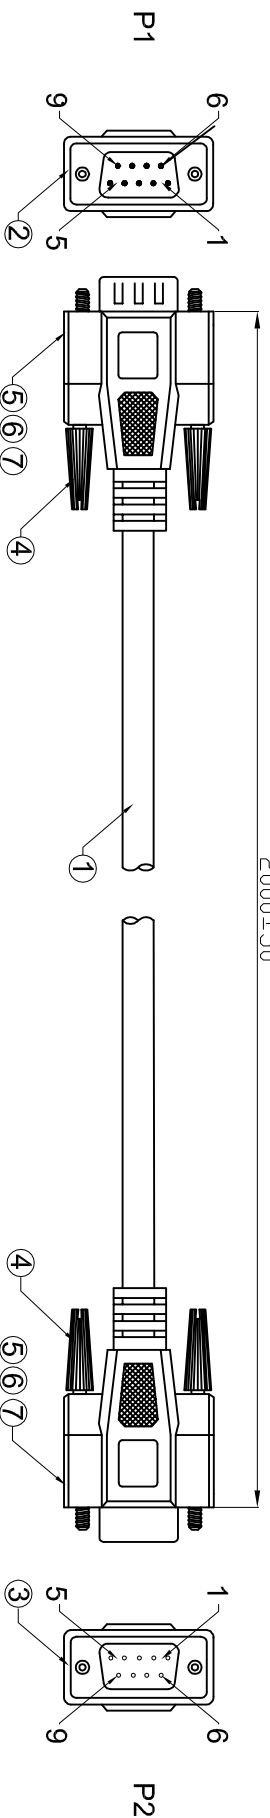

PE Bag Packing

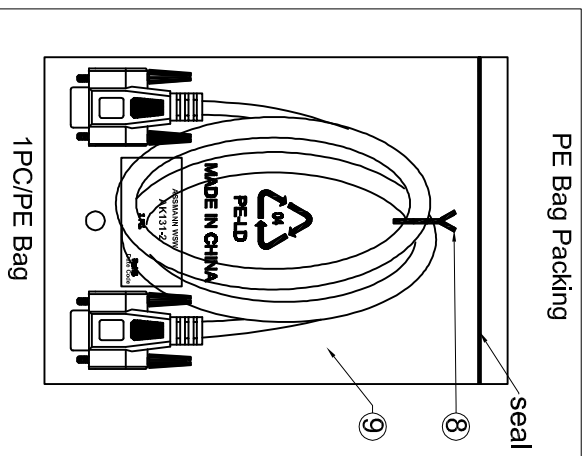

1PC/PE Bag

PIN ASSIGNMENT

P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
Shell	Shell

- Electrical test:
1. 100% short, open, miss wire test
 2. Conduct resistance: 2 Ohm max.
 3. Insulator resistance: 5Mohm min.
 4. Hi-Pot: 300V DC/10ms

①	PE Bag	1pcs	Clear Print black "MADE IN CHINA"+ "1PC"
②	Tie	1pcs	White tie
③	Outermold	NA	PVC 45P Beige(BG002)
④	Innermold	NA	LD-PE
⑤	Tube	2pcs	Heat shrink tube black OD:Ø1.5* L:15mm
⑥	Screw	4pcs	Screw #4-40UNC D-E L=32.5mm Nickel plated Insulator color:Beige(BG002)
⑦	CONN	1pcs	DB 9Pin Female, Pin:G/F Shell-Nickel Insulator color:Blue solder type
⑧	CONN	1pcs	DB 9Pin male, Pin:G/F Shell-Nickel Insulator color:Blue solder type
⑨	Cable	1pcs	No UL 28AWG(7/0.12TC)*9C+D+AL/MY/ar Jacket PVC, Beige(BG002) OD:5.0mm

SPECIFICATION

RoHS compliant

Unit:mm

Scale	Free	Customer-No.
TOLERANCE		ASSMANN WSW-No.
		AK131-2
DIM	TOL	Drawing-No.
		ASS 7603 CA
Angle	TOL	Replace
		Sheet
Id.	Modification	
⑩	Drawn	
	05.04.2016	
	Amy	

ASSMANN
components

rev00

1

2

3

4

5

6

7

G

G

H

H

C

C

D

D

E

E

F

F