




- NOTE
- 1 THIS PRODUCT IS PACKAGED IN TRAY. (60pcs/TRAY)
 - 2 BLEMISH AND HIT MARK CAN BE OCCURED THROUGH OUT THE MANUFACTURING PROCESS WHITCH DOSEN' T AFFECT QUALITY LEVEL. ALSO, BLACK SPOT COULD BE OBSERVED ON THE SURFACE OF HOUSING.
 - 3 EACH CONTACT NO. IS APPLIED TO ADJACENT 6 LEADS AS A LINE.
 - 4 MISALIGNMENT ABSORBING RANGE: ± 0.3 mm max.
 - 5 THE DIMENSION IN PARENTHESES ARE FOR REFERENCES.
 - 6 LOT NO. IS INDICATED AT EITHER ONE OF THE POSITION AS SHOWN.

2	COPPER ALLOY	CONTACT AREA:GOLD-PLATING $0.1 \mu\text{m}$	4	POLYSTYRENE			
		LEAD AREA:TIN-PLATING $1.0 \mu\text{m}$					
		UNDER PLATING:NICKEL $1.0 \mu\text{m}$	3	PHOSPHOR BRONZE	TIN-PLATING $3.0 \mu\text{m}$		
1	POLYAMIDE	BLACK UL94V-0			UNDER PLATING:NICKEL $1.0 \mu\text{m}$		
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA	12.06.15	DRAWING NO.	EDC3-341814-00		
		CHECKED : KI. HIROKAWA	12.06.15	PART NO.	FX30A-4P-3.81DSA20		
		DESIGNED : DK. AIMOTO	12.06.14	CODE NO.	CL570-2102-3-00		
		DRAWN : DK. AIMOTO	12.06.14				

RECOMMENDED HOLE PATTERN DIMENSION OF PCB(5:1)
 (CONNECTOR MOUNTING SIDE, PCB THICKNESS: t=1.6mm)

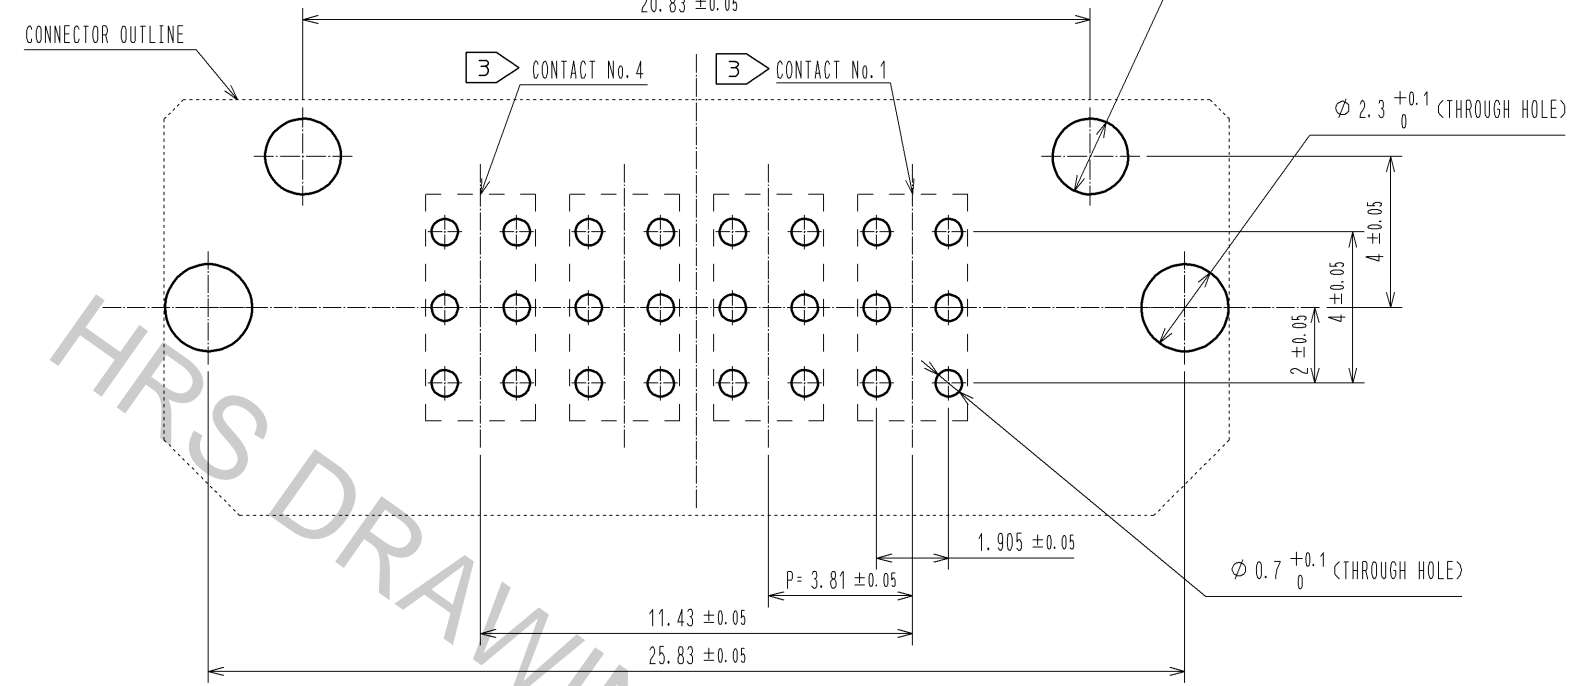

1 DRAWING FOR PACKAGING(1:2)

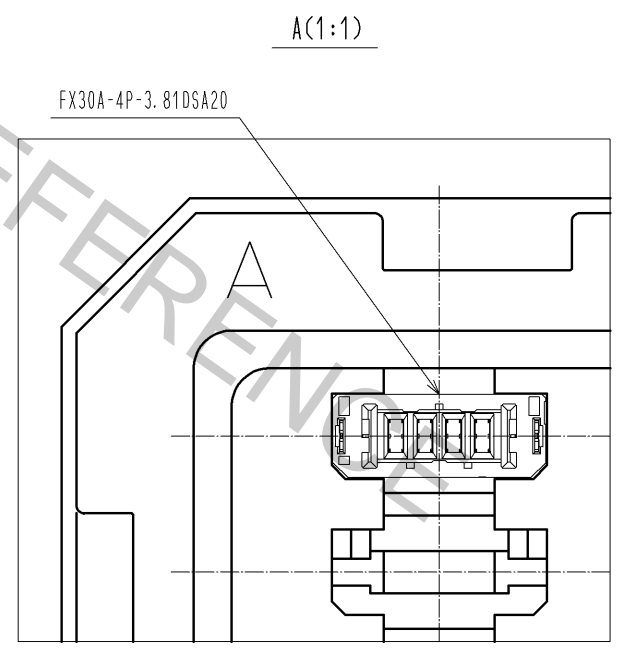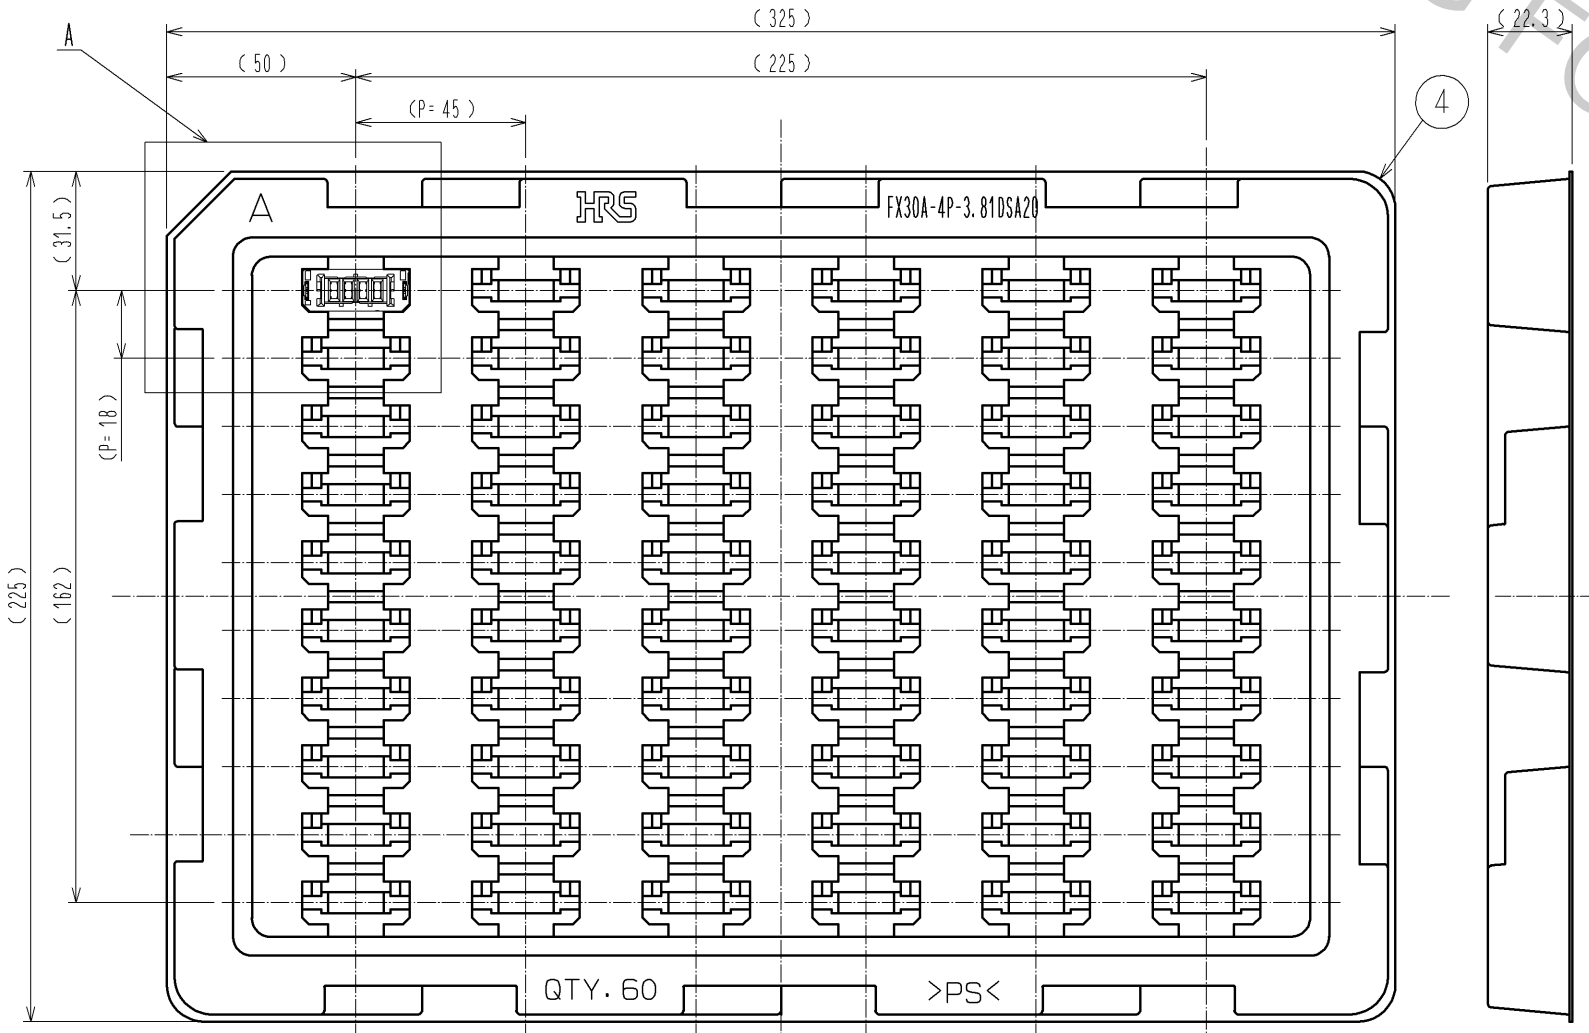

HRS	DRAWING NO.	EDC3-341814-00	
	PART NO.	FX30A-4P-3.81DSA20	
	CODE NO.	CL570-2102-3-00	