


| т G " | m | | σ | |
|--|---|--|------------------------------------|--|
| R 22.6 Max (tr) tr) tr tr) tr tr tr tr tr tr tr tr tr tr tr tr tr t | S T T T T T T T T T T T T T T T T T T T | | LAYOUT SHOWN AS EXAMPLE | 4 |
| Keving Shov | vn as example | | | |
| CHARACTERISTICS -Standard : Based on NIL-DTL-38999 Series III -Shell Material : Aluminium -Shell Plating : Black Zinc Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum | Connector dimension Dim Nominal A 44.5±0.3 B 30.15+0.1/-0.15 R 32.5Max S 41.3±0.4 W 2.2+0.9/-0.1 VV THREAD M25x1-6g | due to a u the Specification | | pply with a third party |
| -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories | | | PN: 8D717Z06PN | |
| -Temperature Range : -65°C to +175°C -Salt Spray : 500 hours -Mass : 39 g ± 10% | | A 01-10-2016 First Release ISS DATE Latest modific Designed By: Date | | CUSTOMER DRAWING |
| | | TITLE Aluminium Receptacle 8D series | | |
| BASIC SERIES: 8D 7 - 17 Z 06 P N SHELL TYPE : Jam nut Receptacle - - 17 Z 06 P N | | SCALE NA | General linear Tolerances: ± | NPRDS / PROJECT 859 |
| CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 17 | ORIENTATION : N CONTACT TYPE : PIN(500 Matings) | SOURIAU WWV | W.SOURIAU.COM | This document is the property of SOURIAU it must not be reproduced or communicated without permission |
| PLATING : Z = Black Zinc Nickel | CONTACT LAYOUT : 17-06 | FORMAT A3 | SOURIAU DRG N° 8D717Z06PN-C | SHEET 1/2 |
| H G F | E | DC | В | Α |

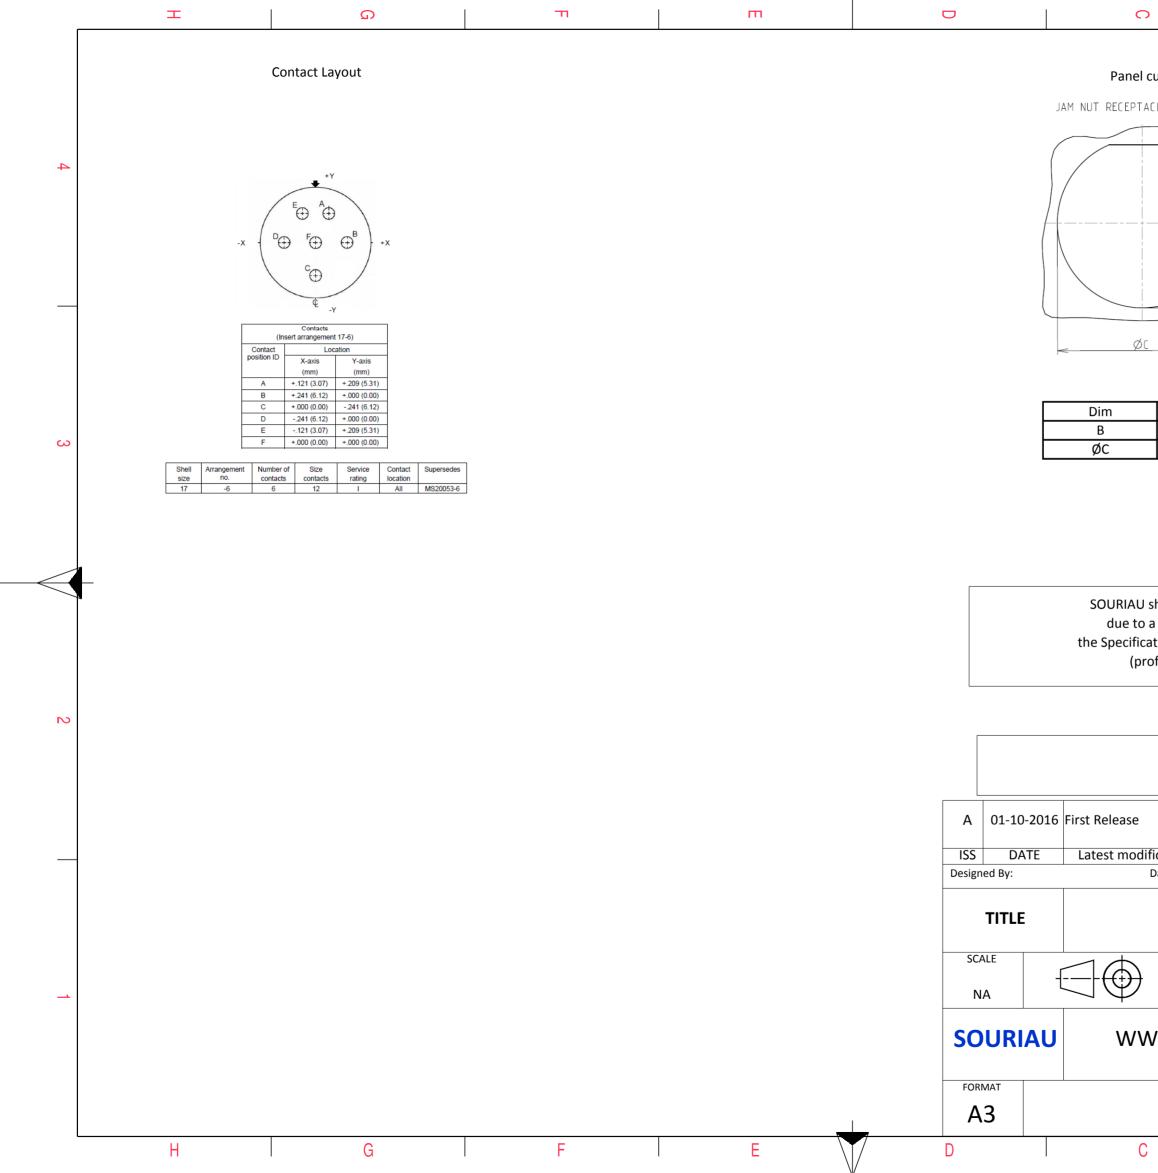

| 0 | | σ | | A | | |
|--|---|--------------|-------------------------------|----------------|---|--|
| | | | | | | |
| l cutou | t | | | | | |
| FACLE (T | YPE 7) | | | | | |
| | | | | | | |
| | | | | | 4 | |
| Sc | | | | | | |
| | > | | | | | |
| | | | | | | |
| 3 | Nominal 0.73+0/-0.25 | | | | | |
| | 2.01+0.25/-0 | | | | 3 | |
| | | | | | | |
| o a use cations professio | of the Products issued by either onal recomment | R | mply with by a third party | | 2 | |
| | | | | | _ | |
| 1.6 | | | | | | |
| dificatic Date: | on - by | | CUSTOMER | DRAWING MOD N° | | |
| | Aluminiu | um Receptacl | e 8D serie | 25 | | |
| | General linea | r | NPRDS / | PROJECT | - | |
| t | Tolerances: ± | | 85 | 9 | 1 | |
| WW.SOURIAU.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission | | | | | | |
| SOURIAU DRG N° | | | | SHEET | - | |
| | | Z06PN-C | | 2/2 | | |
| С | | В | | Α | | |
| | | | | | | |