


I/S View of panel w/
lock removed

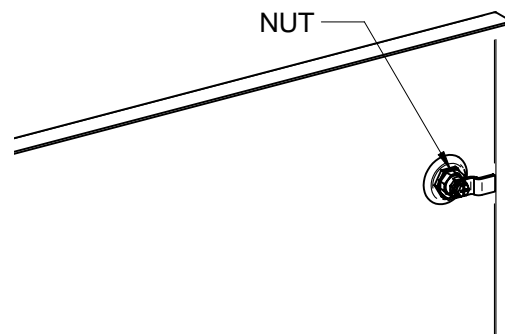

I/S View of panel w/
lock installed

INSTRUCTIONS FOR REMOVING LOCK:

- Remove quarter turn locks by unfastening the nut.
- Slide the lock through the cutout in the panel, as shown.

INSTRUCTIONS FOR INSTALLING LOCK:

- Install quarter turn keyed locks by inserting the lock, without nut, through the panel.
- Then fastening the nut on the I/S as shown.
- Note: When installing the lock, ensure the cam is in the proper location for locking and unlocking the panel. Also, washer stays on O/S of panel.

TOOL BOX



3/4 Open End
Wrench

