

## Cable plug in molded plastic - K-5E - OE/2,0-C04/M40 F8 - 1620311

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Cable plug in molded plastic, Length: 2 m, Color of outer sheath: orange RAL 2003

### Product Features

- Our standard: robust halogen-free PUR cable
- Simple and safe: 100% electrically tested and assembled ready for use
- Designs with pre-assembled cables on one or both sides
- High flexibility: customer-specific assemblies and cable lengths can be supplied



### Key Commercial Data

|                        |          |
|------------------------|----------|
| Packing unit           | 1 pc     |
| Minimum order quantity | 2 pc     |
| Custom tariff number   | 85444290 |
| Country of origin      | Germany  |

### Technical data

|                  |      |
|------------------|------|
| Conductor length | 2 m  |
| Nominal current  | 34 A |

### Connector specifications

|                             |                            |
|-----------------------------|----------------------------|
| Type                        | straight plastic-sheathed  |
| Thread type                 | M40                        |
| Locking type                | Screw locking              |
| Degree of protection        | IP67, when in locked state |
| Number of positions         | 2+3+PE                     |
| Direction of rotation       | Standard                   |
| Type of contact             | Socket                     |
| Insertion/withdrawal cycles | 50                         |

# Cable plug in molded plastic - K-5E - OE/2,0-C04/M40 F8 - 1620311

## Technical data

### Connector specifications

|                                 |                   |
|---------------------------------|-------------------|
| Contact resistance              | < 0.3 mΩ          |
| Max. current                    | 70 A              |
| Voltage                         | 630 V             |
| Overvoltage category            | III               |
| Degree of pollution             | 3                 |
| Rated surge voltage             | 6 kV              |
| Ambient temperature (operation) | -40 °C ... 105 °C |

### Cable specifications

|   |   |
|---|---|
| Type of cable                                 | PSLC11Y-J                                     |
| Shielded                                      | yes   |
| Cable structure                               | 4x 4 mm <sup>2</sup> + 2x 1.5 mm <sup>2</sup> |
| Cable structure (AWG)                         | 12 AWG/4c + 16 AWG/1pr                        |
| External cable diameter                       | 14.9 mm                                       |
| Outer sheath, material                        | TPU   |
| Material wire insulation                      | TPM   |
| External sheath, color                        | orange RAL 2003                               |
| Nominal voltage, cable                        | 1000 V  |
| Test voltage                                  | 4 kV (2 kV signal)                            |
| Rated current                                 | 34 A  |
| Smallest bending radius, movable installation | 149 mm  |
| Ambient temperature for fixed installation    | -50 °C ... 80 °C                              |
| Ambient temperature for flexible installation | -20 °C ... 70 °C                              |

## Classifications

### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27060306 |
| eCl@ss 4.1 | 27060306 |
| eCl@ss 5.0 | 27061801 |
| eCl@ss 5.1 | 27061801 |
| eCl@ss 6.0 | 27279218 |
| eCl@ss 7.0 | 27279218 |
| eCl@ss 8.0 | 27062011 |
| eCl@ss 9.0 | 27062011 |

### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001121 |
|----------|----------|

# Cable plug in molded plastic - K-5E - OE/2,0-C04/M40 F8 - 1620311

## Classifications

### ETIM

|          |          |
|----------|----------|
| ETIM 4.0 | EC001855 |
| ETIM 5.0 | EC001578 |

### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 26121604 |
| UNSPSC 7.0901 | 26121604 |
| UNSPSC 11     | 26121604 |
| UNSPSC 12.01  | 26121604 |
| UNSPSC 13.2   | 26121604 |

## Approvals

### Approvals

Approvals

UL Listed / cUL Listed / EAC / cULus Listed

Ex Approvals

Approvals submitted

### Approval details

|                    |       |
|--------------------|-------|
| UL Listed          |       |
| Nominal current IN | 20 A  |
| Nominal voltage UN | 600 V |

|                    |       |
|--------------------|-------|
| cUL Listed         |       |
| Nominal current IN | 20 A  |
| Nominal voltage UN | 600 V |

# Cable plug in molded plastic - K-5E - OE/2,0-C04/M40 F8 - 1620311


## Approvals

EAC


cULus Listed

## Drawings

Schematic diagram




Dimensional drawing

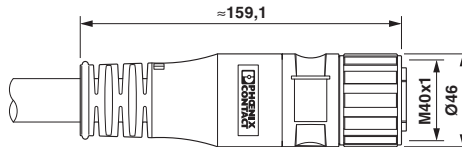

Connector pin assignment

Dimensional drawing

Circuit diagram

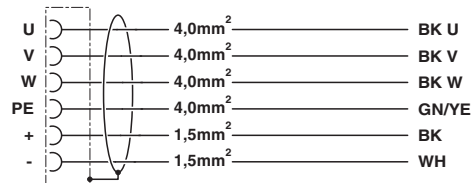

Contact assignment of M40 plugs/sockets