


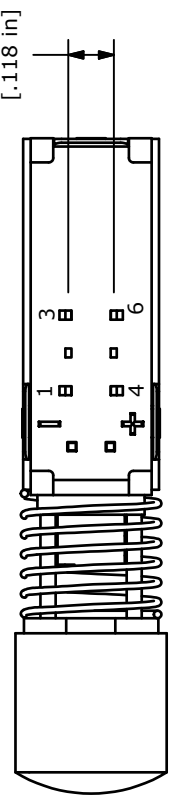


- NOTES:
- ALL DIMENSIONS IN MM [INCH]
 - GENERAL TOLERANCE: $x.x \pm 0.4\text{mm}$
 $x.xx \pm 0.25\text{mm}$
 - RATING: DC 30V, 0.3A
 - OPERATING FORCE: $200 \pm 100\text{gf}$
 - TRAVEL: 3.3mm FULL TRAVEL
2.5mm TO LOCK
 - LIFE CYCLES: 10,000 CYCLES
 - OPERATING TEMPERATURE: -20°C TO 70°C
 - CONTACT RESISTANCE: 20mΩ MAX.
 - INSULATION RESISTANCE: 100MΩ MIN@ 500VDC.
 - LED COLOR: BLUE
 - ▲ DENOTES CRITICAL PARAMETER.
 - 2002/95/EC (RoHS) COMPLIANT.

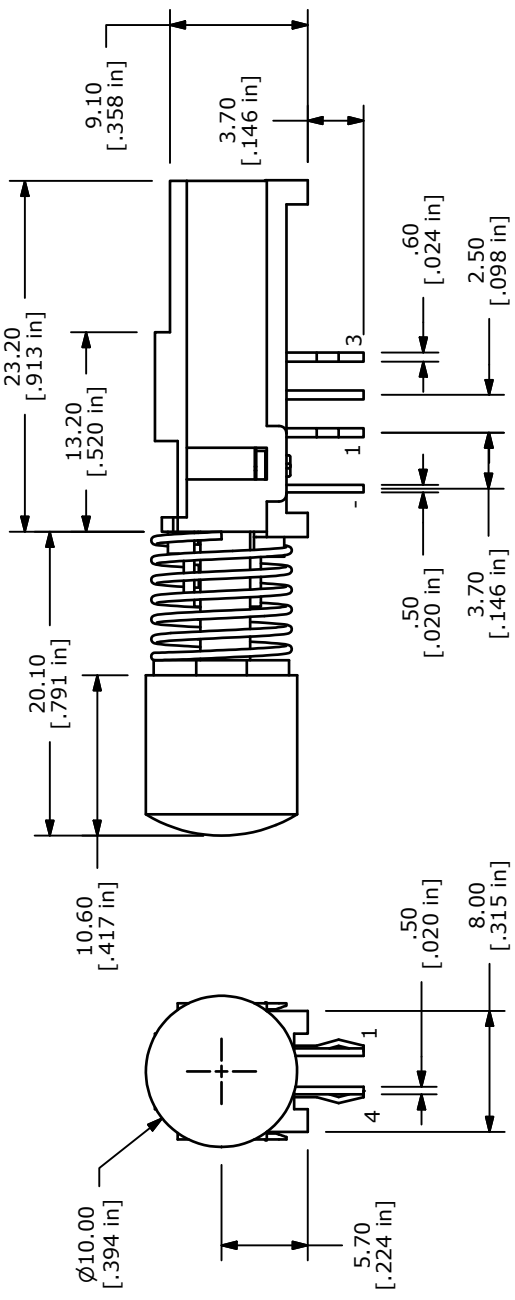

| LED SPECS | UNITS | BLUE |
|---------------------------|-------|---------|
| FORWARD CURRENT | mA | 20 |
| FORWARD VOLTAGE @20mA | V | 3.5-4.0 |
| LUMINOUS INTENSITY @ 10mA | MCD | 350 |

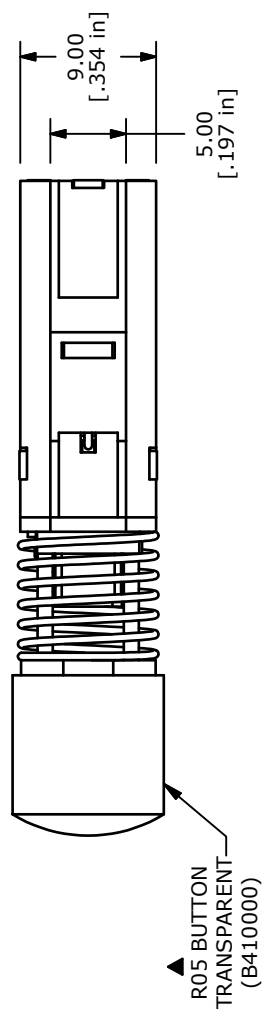

TITLE WBL2UEEBQR05CLR

| | | | | |
|-----|--------|-------------|---------|-----|
| A | 19571 | NEW Release | 1/10/11 | BGL |
| REV | PCR NO | DESCRIPTION | DATE | BY |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

| | | | | | | | | | |
|-------|-----|------|-----------|----|-----|-----|---------|-----|---|
| SCALE | 2:1 | DATE | 1/10/2011 | DR | BGL | DWG | XB0928P | REV | A |
|-------|-----|------|-----------|----|-----|-----|---------|-----|---|