

SUMMARY



Image is for illustrative purpose only

Wires

Low	6
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0

Download

[Request a quote](#)

[Catalog](#)

Series	P
Termination type	Male solder
IP rating	50
Cable Ø	5.30 - 6.50 mm
Matching parts	PLG.M0.6NL.LN
Status	
Alternative part	

TECHNICAL DETAILS

Mechanics

Shell Style/Model	PA*: Straight plug with cable collet
Keying	1 key (alpha=0; Plug: male contact; Receptacle: female contact)
Housing Material	PSU (Polysulfone), black
Cable Fixing	C65: 5.3 - 6.5 mm
Variant	N : Black collet nut

Performance

Configuration	1P.M06 : 6 Low Voltage
Insulator	
Rated Current	6 Amps

Specifications

Contact Type:	Solder
Max. Matings:	2000
Contact Dia.:	0.7 mm (0.0275in)
Bucket Dia.:	0.6 mm (0.024in)
Max. Solid Conductor:	0.14 mm ² (AWG 26)
Max. Stranded Conductor:	0.14 mm ² (AWG 26)


R (max): 6.5 mOhm
Test voltage (kV rms) Contact-contact: 1.05
Air clearance min. (mm) or Creepage distance min. (mm): 0.85

Others

F ret (min): 50 N
F ret (max): 150 N
IP Rating: 50

DRAWINGS

Draws

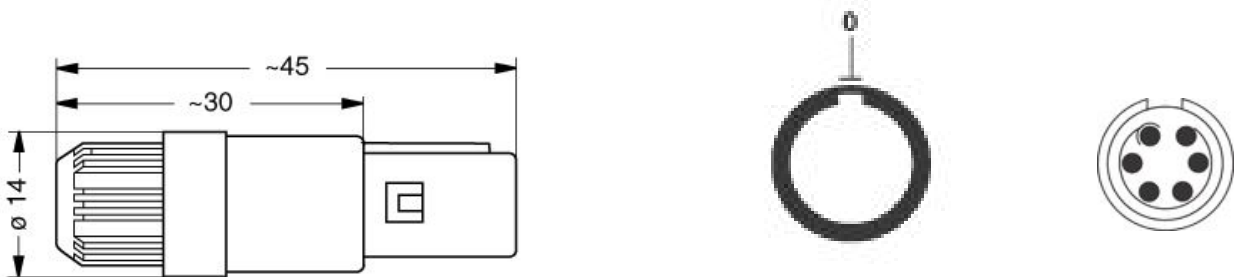

Dimensions

	A	L
mm.	14	45
in.	0,55	1,77

RECOMMENDED BY LEMO

Tools

None

Cables

012 080	PVC	Grey	
260 250	PVC	Grey	