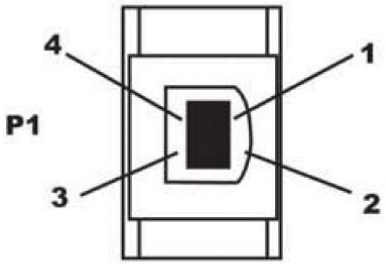

USB B Female



USB A Female

PIN Out

(P1)	(P2)
1	1
2	2
3	3
4	4
Shell	Shell

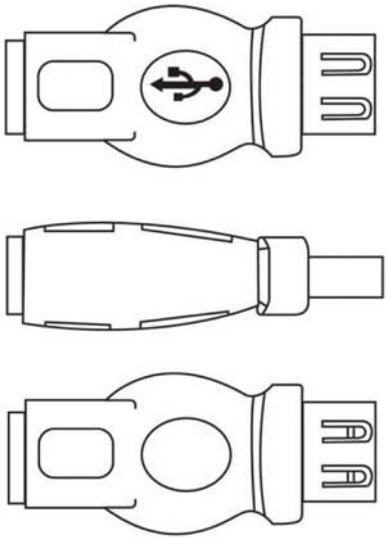

Material:

- Jump Wire: Non-UL 26AWG(7/0.16) Tinned Copper
- Connector:
  - P1: USB B Female Gold Flash Contact, Nickel Plated Shell
  - P2: USB A Female Gold Flash Contact, Nickel Plated Shell
  - Plastic: White
- Hood: Molded Type PVC 45 P
- Color: Beige

Electrical:

- 100% Open, short & miswire test
- Contact Resistance: 3Ω Max.
- Insulation Resistance: 20MΩ Min.

RoHS Complaint

Scale	1:1							Name
TOLERANCE						Drawn	10.19.11	Chappell
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

ASSMANN WSW components

Item No.
A-USB-1-R

Title
USB B Female <=> USB A Female Adapter

Drawing No.

rev00

Replace

Sheet