

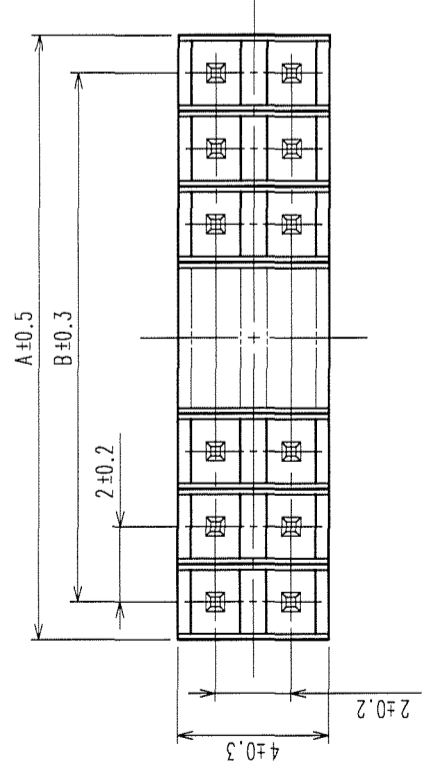


| COUNT | DESCRIPTION OF REVISIONS | BY | CHKD | DATE | COUNT | DESCRIPTION OF REVISIONS | BY | CHKD | DATE |
|-------|--------------------------|----|------|------|-------|--------------------------|----|------|------|
| △ | | | | | △ | | | | |
| △ | | | | | △ | | | | |
| △ | | | | | △ | | | | |

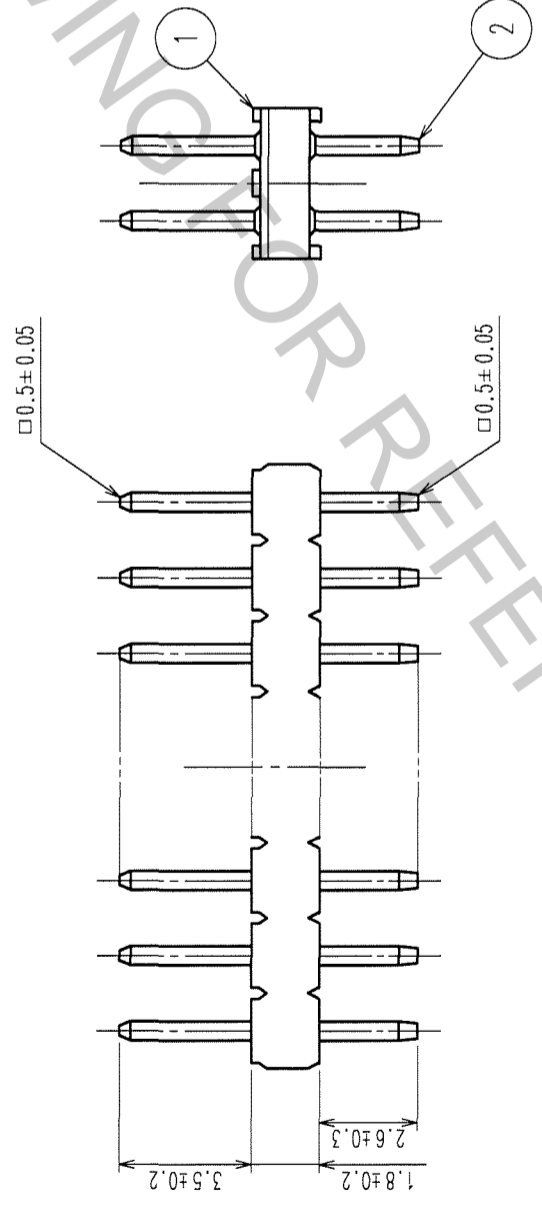


RECOMMENDED PCB BOARD HOLE PATTERN

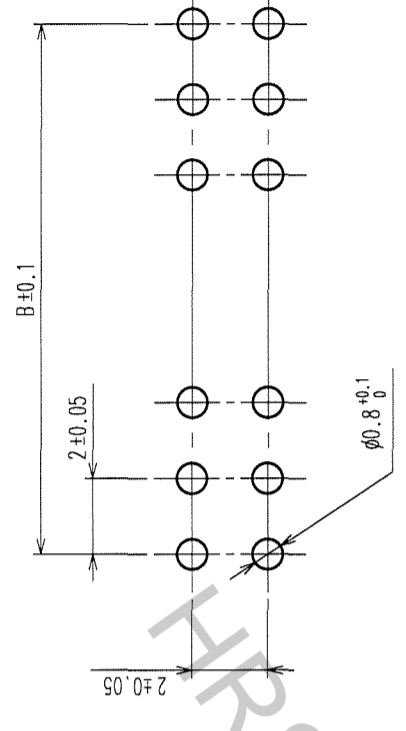

| PART No. | CODE No. | A | B |
|-------------------|-----------------|----|----|
| A3B-4PA-2DSA(71) | CL621-0401-1-71 | 4 | 2 |
| A3B-6PA-2DSA(71) | CL621-0402-4-71 | 6 | 4 |
| A3B-8PA-2DSA(71) | CL621-0403-7-71 | 8 | 6 |
| A3B-10PA-2DSA(71) | CL621-0404-0-71 | 10 | 8 |
| A3B-12PA-2DSA(71) | CL621-0405-2-71 | 12 | 10 |
| A3B-14PA-2DSA(71) | CL621-0406-5-71 | 14 | 12 |
| A3B-16PA-2DSA(71) | CL621-0407-8-71 | 16 | 14 |
| A3B-18PA-2DSA(71) | CL621-0408-0-71 | 18 | 16 |
| A3B-20PA-2DSA(71) | CL621-0409-3-71 | 20 | 18 |
| A3B-22PA-2DSA(71) | CL621-0410-2-71 | 22 | 20 |
| A3B-24PA-2DSA(71) | CL621-0411-5-71 | 24 | 22 |
| A3B-26PA-2DSA(71) | CL621-0412-8-71 | 26 | 24 |
| A3B-28PA-2DSA(71) | CL621-0413-0-71 | 28 | 26 |
| A3B-30PA-2DSA(71) | CL621-0414-3-71 | 30 | 28 |
| A3B-32PA-2DSA(71) | CL621-0415-6-71 | 32 | 30 |

NOTES 1 NUMBER OF CONTACTS.

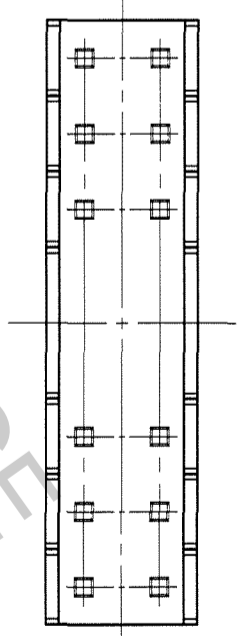

| | | | | | | |
|----------------|-----------|--------------------------|----------|-----------------|-----------------|---|
| 1 | POLYAMIDE | BLACK | UL94V-0 | 2 | BRASS | CONTACT AREA : GOLD FLASH DIP AREA : TIN-PLATING 2μm min. UNDER PLATING : NICKEL 2μm min. |
| NO. | MATERIAL | FINISH, REMARKS | NO. | MATERIAL | FINISH, REMARKS | |
| CODE NO. (OLD) | CL | | DESIGNED | K. NAKAMURA | CHECKED | K. Ogawa |
| | | | DRAWN | K. NAKAMURA | APPROVED | H. Okawa |
| | | | 06.02.01 | 06.02.01 | 06.02.01 | 06.02.01 |
| DRAWING NO. | | PART NO. | | FINISH, REMARKS | | RELEASED |
| EDC3-071656-21 | | A3B-*PA-2DSA(71) | | | | |
| SCALE | FREE | CODE NO. | | CL621 | | 1/1 |
| UNITS | mm | HIROSE ELECTRIC CO., LTD | | | | |

TO
PCK