


В

С

Copyright FCI.

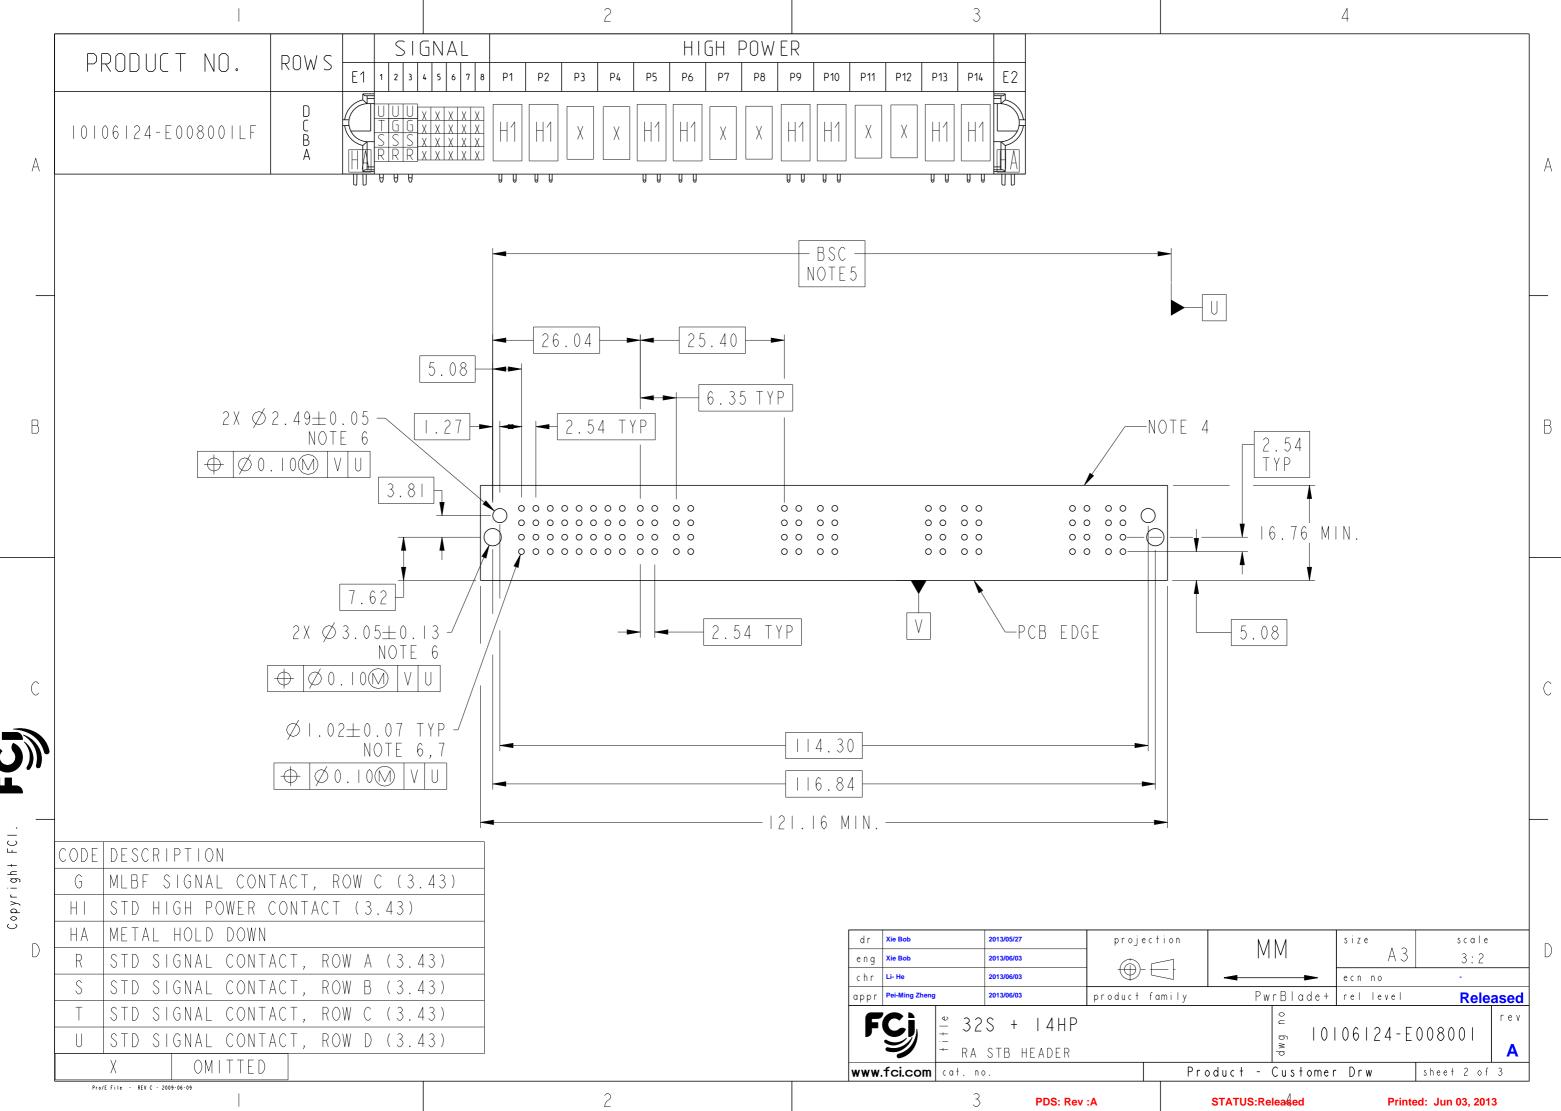

3

NOTES:

- I) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE. THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
 - -HOUSING GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
 - -SIGNAL CONTACT COPPER ALLOY.
 - -POWER CONTACT HIGH CONDUCTIVITY COPPER ALLOY.

2

- 3) PLATING SPECIFICATION REFER TO FCI 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) I.15±0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ± 0.07 MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658. APPLICATION SPECIFICATION REFER TO FCI GS-20-141. PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.

dr eng	Xie Bob Xie Bob		2013/05/27 2013/06/03	projec	tion	MM		size A	3	scale 3:2		
chr appr	Li- He Pei-Ming Zheng	1	2013/06/03 2013/06/03	product f	product family		PwrBlade+		ecn no rel level		- Release	
	Cj	– 32 – 32 – RA	S + I 4 H P stb header	r · · · · ·			0 L		06124-			rev A
www.	fci.com				Prod	duct –	Custor	mer	Drw	sheet	3 of	3
		3 PDS: Rev :A			STATUS:Released			Printed: Jun 03, 2013				

А

С



FCI

Copyright

D

А

В

С