



UNIT:MM

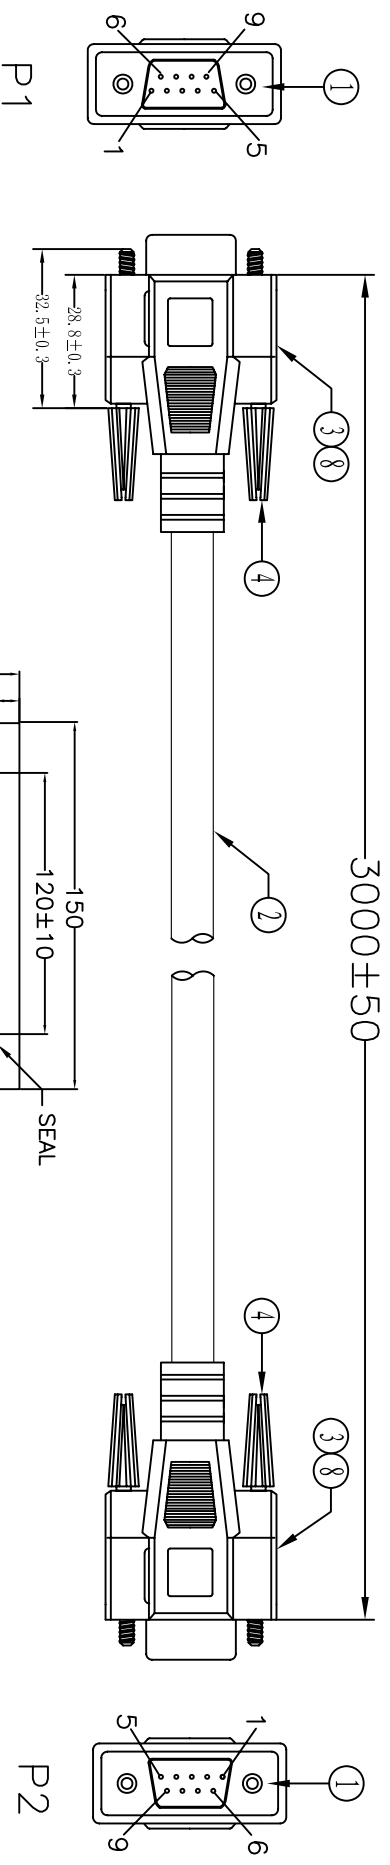

Electronic Test:
 1. 100% Test,(Open,Short, Miss Wire)
 2. Contact Resistance:2 ohm max.
 3. Insulation Resistance:5M ohm min.
 4. Hi-Pot:300V DC.

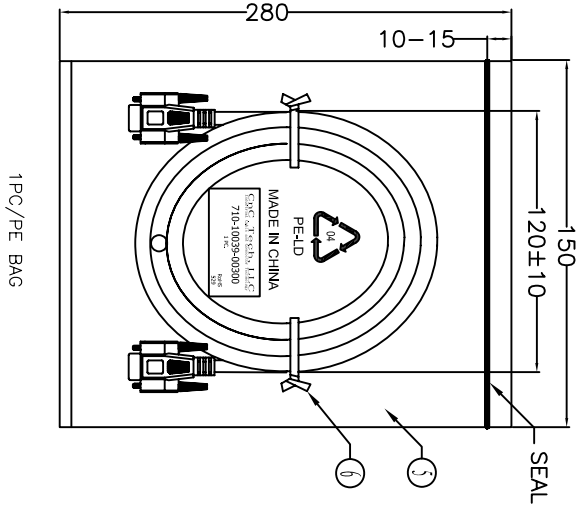

| PIN ASSIGNMENT | |
|----------------|-------|
| P1 | P2 |
| 1 | 1 |
| 2 | 2 |
| 3 | 3 |
| 4 | 4 |
| 5 | 5 |
| 6 | 6 |
| 7 | 7 |
| 8 | 8 |
| 9 | 9 |
| SHELL | SHELL |

| | | | |
|---|------------|-------|--|
| ⑧ | TUBE | 2 | HEAT SHRINK TUBE BLACK ODD.6*L15MM |
| ⑦ | PE BAG | 1/10 | CLEAR SIZE:360*380*0.05mm PRINT BLACK*MADE IN CHINA*+10PCS*印生产周期,有透汽孔. |
| ⑥ | TIE | 2 | WHITE L=100mm |
| ⑤ | PE BAG | 1 | CLEAR SIZE:150*280*0.05mm PRINT BLACK*MADE IN CHINA*+1PC*印生产周期,有透汽孔. |
| ④ | SCREW | 4 | SCREW:#4-40UNC D-E L32.5mm,NICKEL PLATED,INSULATION COLOR BEIGE(V-29). |
| ③ | IN JACKET | 89 | CLEAR LDPE(MOULD NO:NM-049) |
| ② | OUT JACKET | 43.5g | BEIGE(V-29#) 40P PVC(MOULD NO:WM-113) |
| ① | CABLE | 1 | NOUL 30AWG*9C+D+AL ODS.0mm COLOR BEIGE(V-29#) L=3000±15mm |
| ① | CONN | 2 | DB 9P FEMALE SOLDER TYPE G/F, BLUE INSULATION |

| CNC Tech, LLC | | | |
|---|---------|-------------|-----------------|
| Industrial Cable and Connector Technology | | | |
| DRAWN BY | ZHONGHS | DRAWING NO. | |
| CHECKED BY | | CUSTOMER | |
| APPROVAL BY | | ITEM NO. | 710-10039-00300 |
| DATE | | DATE | 2012-02-06 |
| VERSIONS/EDITION | A/0 | PROJECT | |

4 3 2 1