

SUMMARY

Wires

| | |
|---------|---|
| Low | 0 |
| High | 0 |
| Coax | 0 |
| Triax | 0 |
| Quad | 0 |
| Fiber | 0 |
| Fluidic | 0 |



Image is for illustrative purpose only

Download

[Request a quote](#)

[Catalog](#)

| | |
|------------------|-------------------------|
| Series | 2B |
| Termination type | No contacts / Accessory |
| IP rating | 0 |
| Cable Ø | 0.00 - 0.00 mm |
| Matching parts | |
| Status | |
| Alternative part | |

TECHNICAL DETAILS

Mechanics

| | |
|-------------------|---|
| Shell Style/Model | GMF*: Bend relief for plug |
| Keying | 2 keys (beta=145, plug: male contacts, receptacle: female contacts) |
| Housing Material | |
| Cable Fixing | ∅ 0 - 0 mm |
| Variant | |

Performance

| |
|---------------|
| Configuration |
| Insulator |
| Rated Current |


Others

| |
|---|
| Temp (min / max): -55° C / +250° C |
| Humidity (max): <=95% [at 60 deg C / 140 F] |

Vibration: 15 g [10 Hz - 2000 Hz]
Shock Resistance: 100 g [6 ms]
Salt Spray Corrosion: >1000 hr
Climatical Category: 50/175/21
Shielding (min): 75 dB (10 MHz)
Shielding (min): 40 dB (1 GHz)
IP Rating: 0

DRAWINGS

Draws

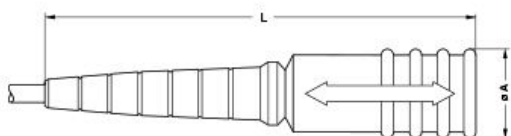

Dimensions

| | A | L |
|-----|------|------|
| mm. | 22 | 95 |
| in. | 0,87 | 3,74 |

RECOMMENDED BY LEMO

Tools

None

Cables