


DIN rail bus connectors - HBUS 35,6-16P-1S BK - 2896283

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

DIN rail connector, nominal current: 3 A, number of positions: 16, pitch: 2.54 mm, color: jet black



Key Commercial Data

Packing unit	10 STK
GTIN	 4 046356 096768
GTIN	4046356096768

Technical data

General

Housing material	Polyamide
------------------	-----------

Ambient conditions

Ambient temperature (operation)	-40 °C ... 105 °C (dependent on the derating curve)
---------------------------------	---

Dimensions

Length	37.1 mm
Width	35.6 mm
Pitch	2.54 mm
Height	13.6 mm

Technical data

Connection in acc. with standard	CUL
Nominal voltage U_N	60 V
Nominal current I_N	2 A
Indicator1	CUL1
Number of positions	16

Standards and Regulations

Connection in acc. with standard	CUL
----------------------------------	-----

DIN rail bus connectors - HBUS 35,6-16P-1S BK - 2896283

Technical data

Standards and Regulations


Flammability rating according to UL 94	V0
--	----

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values


Drawings

Dimensional drawing

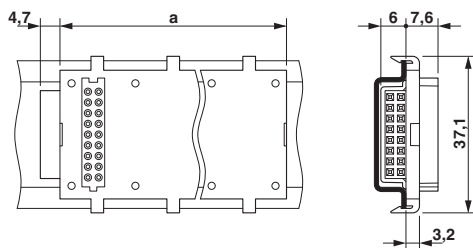

A=35.6 mm

Circuit diagram

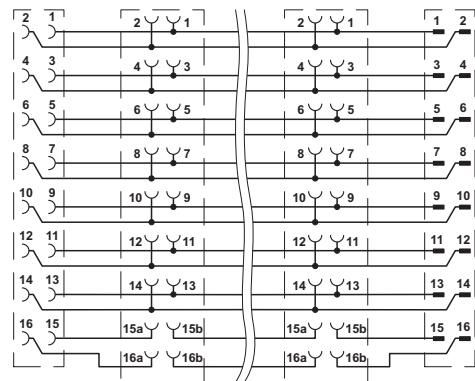

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / EAC / cULus Recognized


Ex Approvals


Approval details


UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 118976
Nominal voltage UN	30 V		
Nominal current IN	2 A		

DIN rail bus connectors - HBUS 35,6-16P-1S BK - 2896283

Approvals

cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 118976
Nominal voltage UN		30 V	
Nominal current IN		2 A	

EAC		B.01742
-----	---	---------

cULus Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm
------------------	---	---

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>