

HC-B 10-SMQ-52/O2M25

Order No.: 1604754


Figure shows a product variant with a height of 74 mm



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1604754>

HEAVYCON box mounting base B10, with double locking latch, height 52 mm, with supports 2xM25

Commercial data

| | |
|--------------------------|--|
| GTIN (EAN) |  |
| sales group | D002 |
| Pack | 10 pcs. |
| Customs tariff | 85389099 |
| Catalog page information | Page 485 (PC-2009) |

Product notes

WEEE/RoHS-compliant since:
01/18/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

| | |
|--------|--|
| Note | For contact inserts HC-B10, BB18, DD42, M, K8/24 |
| Design | B10 |
| Height | 52 mm |
| Width | 52 mm |
| Length | 93 mm |

| | |
|---------------------------------|---------------------------------|
| Housing type | Box mounting bases |
| Locking type | With double locking latch |
| Type of the screw connection | 2x M25 |
| Degree of protection | IP65 |
| Ambient temperature (operation) | -40 °C ... 125 °C |
| Housing material | Aluminum, die-cast |
| Housing surface material | Powder-coated, gray |
| Seal material | NBR |
| Material lock | High-grade steel, handle: PA-GF |
| Material grip body interlock | PA-GF |

Certificates / Approvals




Certification

GOST

Diagrams/Drawings

Dimensioned drawing

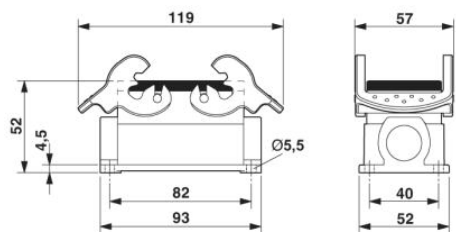

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;