
ד   ס   ד	ı — —		0		A	
A Z					4	
			LAYOUT SHOWN AS E	XAMPLE	3	
Ke	eying Shown as example					
CHARACTERISTICS	Connector dimension					
-Standard : Based on MIL-DTL-38999 Series III	Dim Nominal					
-Shell Material : Aluminium -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8um minimum	Z     31 Max       -Shell Plating     : Nickel       -Insulator     : Thermoplastic       -Contacts     : Copper Alloy       -Seals & Grommet     : Silicon Elastomer					
-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories	-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories PDelivered with Souriau contacts and Accessories					
-Temperature Range : -65°C to +200°C -Salt Spray : 48 hours		A 06-10-2016 First	Release			
		ISS DATE La	itest modification - by		MOD N°	
		Designed By:	Date:	CUSTOMER	DRAWING	
		TITLE Aluminium Plug 8D series				
BASIC SERIES: 8D 5 - 21 F 11 SHELL TYPE : Plug with RFI Shielding	P C	SCALE	General linear Tolerances:	NPRDS / 1 85	59	
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 21	SOURIAU         This document is the property of SOURIAU           it must not be reproduced or communicated without permission					
	FORMAT	COLIDIALI		SHEET		
PLATING : F = Nickel	CONTACT LAYOUT : 21-11	A3	SOURIAU		1/2	
H G F			8D521F			
H I G I F	I E	D	C	B	А	

r	Ŧ	۵	н <b>г</b>	m		0
		Contact Layout				
4	-x -	$ \begin{array}{c} \varepsilon & +^{\vee} \\ & & \\ & & \\ & & \\ & & \\ & \\ & \\ & \\ $				
	B         + 306 (7.77)           C         + 348 (8.84)           D         + 227 (5.77)           E         + 000 (0.00)           F         - 227 (5.77)           Shell         Arrangement no.         Nu<	Y-axis (mm)         position ID         X-axis (mm)         Y-axis (mm)           +.332 (8.43)         G        348 (8.84)        061 (1.55)           +.177 (4.50)         H        306 (7.77)         +.177 (4.50)          061 (1.55)         J        121 (3.07)         +.322 (8.43)          270 (6.86)         K         +.000 (0.00)         +.123 (3.12)          353 (8.97)         L         +.000 (0.00)        115 (2.92)          270 (6.86)	s			
ى			_			
	1					
	F					SOURIAU shall not be liable for an due to a use of the Products w the Specifications issued by either o (professional recommenda
N						Count FR
						PN: 8D521
					A 06-10-20	16 First Release
					ISS DATE Designed By:	Latest modification - by Date:
					TITLE	Alumi
<u> </u>					SCALE NA	General linear Tolerances:
					SOURIA	U WWW.SOURIAU.
					FORMAT A3	SOURIAU 8D521F
l	Н	G	F	E	D	C

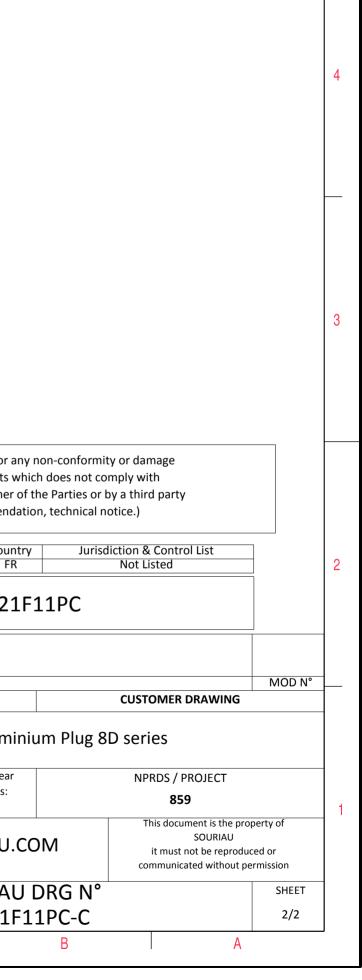

 $\triangleright$ 

σ