PART NUMBER
CDIRBS2W

REVISION HISTORY					
REV	DOCUMENT	DESCRIPTION	CHG'D BY	DATE	APPROVED
A	0075412	RELEASE PER ECO	NMN	2012-12-12	K. BALAJI

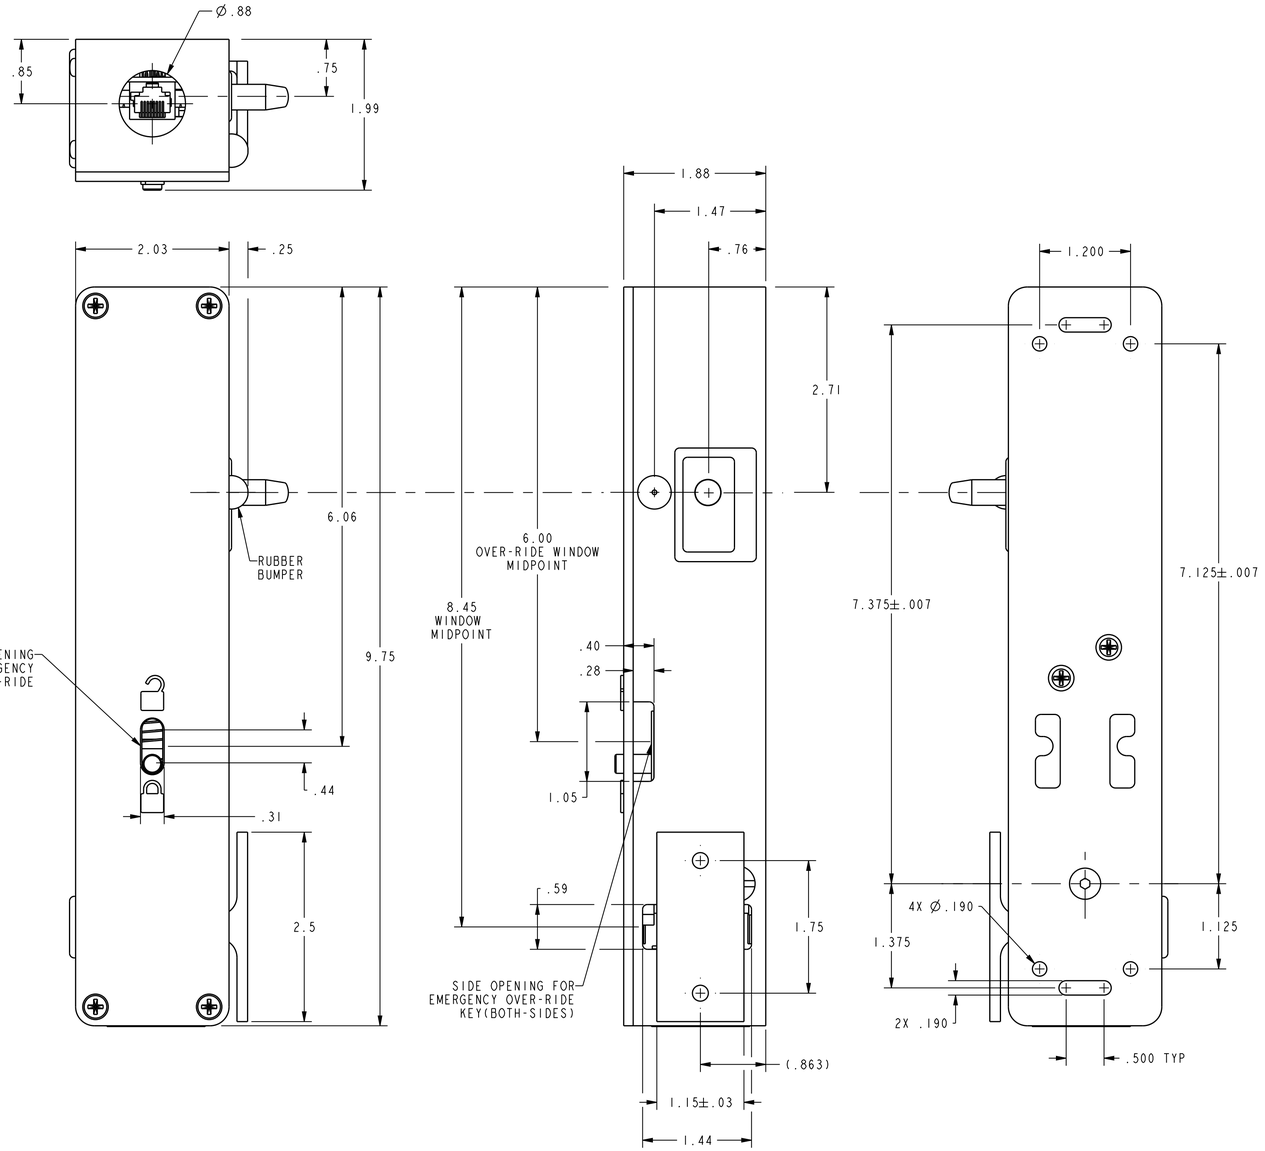

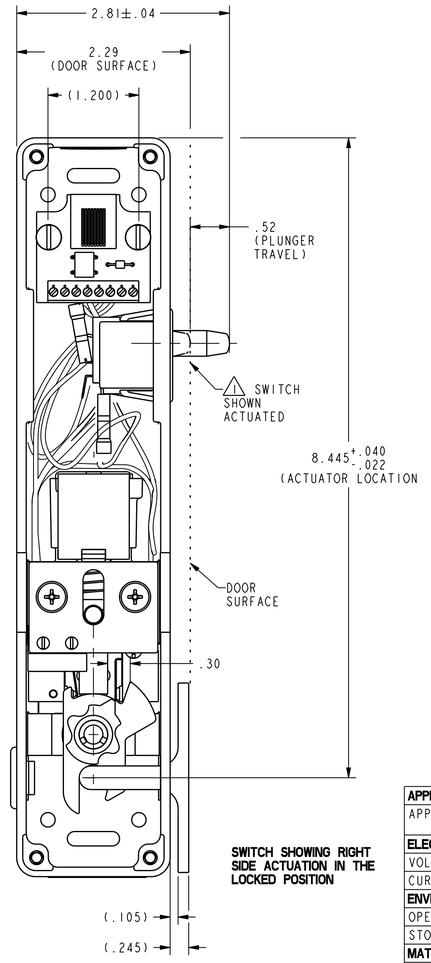

SWITCH SHOWING RIGHT SIDE ACTUATION IN THE LOCKED POSITION

ELECTRICAL SCHEMATIC

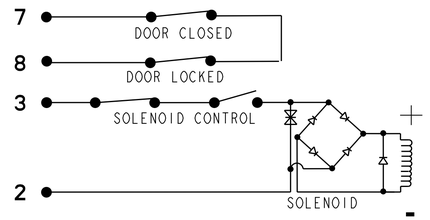

APPROVALS			
APPROVALS COVERAGE	UL104/ASME17.1/CSA B44.1 FOR COMMERCIAL USE		
ELECTRICAL RATINGS			
VOLTAGE	24 VAC	24 VDC	
CURRENT	0.35A, 60Hz	0.2A	
ENVIRONMENTAL			
OPERATING TEMPERATURE	+4° TO +38°C (+40° TO +100°F)		
STORAGE TEMPERATURE	-40° TO 60° C (-40° TO +140°F)		
MATERIAL OF CONSTRUCTION			
ACTUATOR KEY	INVESTMENT CAST STAINLESS STEEL WITH POWDER COAT FINISH WHITE COLOR		
CAM	INVESTMENT CAST STAINLESS STEEL		
COVER	DIE CAST ZINC WITH POWDER COAT FINISH WHITE COLOR		
HOUSING	DIE CAST ZINC WITH POWDER COAT FINISH WHITE COLOR		

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
DECIMAL TOL NO PLACE ··· ±.400
1 PLACE ··· ±.030
2 PLACE ··· ±.010
3 PLACE ··· ±.005
ANGULAR TOL · ±2° CHAMFER · ±3°

THIRD ANGLE PROJECTION

MATERIAL -
-

FINISH -
-

APPLICABLE DOCUMENTS: ASME Y14.100-2004
ASME Y14.5-2009

COMPUTER GENERATED DRAWING: PRO/ENGINEER

Honeywell

TITLE
SWITCH ASSEMBLY

SIZE	CAGE CODE	DWG NO	TYPE	REV
D	-	CDIRBS2W	I	A

SCALE 1:1 REF WT: - SHEET 1 of 1

RELEASE DATE	2012-12-05
DRW: K. NAVEEN	2012-12-05
RDE: K. BALAJI	2012-12-05
QA: -	-
CHK: K. BALAJI	2012-12-05

HONEYWELL CONFIDENTIAL
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE, NOR USED FOR MANUFACTURING PURPOSE'S WITHOUT WRITTEN PERMISSION FROM HONEYWELL