

т	വ	н т	m	0



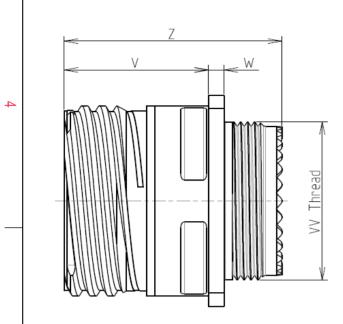

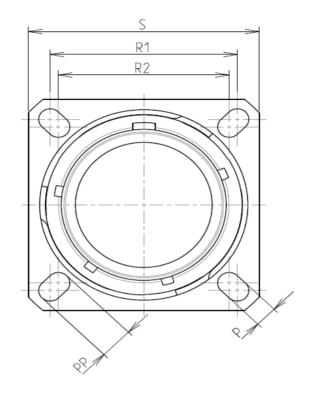

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 15

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	_∶ -65°C to +175°C			
-Salt Spray	: 500 hours			

: 19.54 g ± 10%

8D 0

G

15

W

05

Ρ


F

А

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.39±0.2		
R1	24.61		
R2	23.01		
S	31±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M22x1-6g		

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

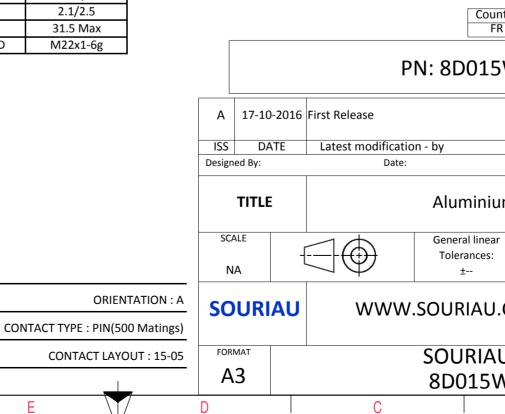

	ω		Þ			
					4	
L.S. EXAIV	1PLE				3	
which er of the idation, intry R	does not con Parties or b technical no	oy a third par	rty Itrol List		2	
				MOD N°		
		CUSTOME	R DRAWING			
um R	n Receptacle 8D series					
ar			/ PROJECT 359		1	
I.COI	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	RG N°			SHEET		
vvU3	B B		A	1/2	J	

		G	н г	m		0	
		Contact Layout					Panel Cutou
4	د. 	$E \bigoplus_{r,y} E \bigoplus_$			Ā	SQUARE FLANGE RECEPTACLE REAR MOUNTING	(TYPE 0)
		X-axis Y-axis (mm) (mm) +.000 (0.00) +.100 (2.54) +.174 (4.42) +.024 (0.61) +.094 (2.39) 148 (3.76) 094 (2.39) 148 (3.76) 174 (4.42) +.024 (0.61)			ک ۲		ØT
ω							Dim ØA ØAA R1 ØT
						due to a use the Specification	not be liable for any e of the Products wh s issued by either of ional recommendat
0						r	
					A 17-10-	2016 First Release	PN: 8D015V
					ISS DA Designed By:	TE Latest modificati Date:	
					TITLE		Aluminium
<u> </u>					SCALE NA	$\bigcirc \bigcirc$	General linear Tolerances: ±
					SOURI	AU WWW	.SOURIAU.C
					FORMAT A3		SOURIAU 8D015W
	Н	G	F	E	D	С	

