

## Notice for TAIYO YUDEN products

---

Please read this notice before using the TAIYO YUDEN products.

### REMINDERS

- Product information in this catalog is as of October 2012. All of the contents specified herein are subject to change without notice due to technical improvements, etc. Therefore, please check for the latest information carefully before practical application or usage of the Products.

Please note that Taiyo Yuden Co., Ltd. shall not be responsible for any defects in products or equipment incorporating such products, which are caused under the conditions other than those specified in this catalog or individual specification.

- Please contact Taiyo Yuden Co., Ltd. for further details of product specifications as the individual specification is available.
- Please conduct validation and verification of products in actual condition of mounting and operating environment before commercial shipment of the equipment.
- All electronic components or functional modules listed in this catalog are developed, designed and intended for use in general electronics equipment.(for AV, office automation, household, office supply, information service, telecommunications, (such as mobile phone or PC) etc.). Before incorporating the components or devices into any equipment in the field such as transportation,( automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network (telephone exchange, base station) etc. which may have direct influence to harm or injure a human body, please contact Taiyo Yuden Co., Ltd. for more detail in advance. Do not incorporate the products into any equipment in fields such as aerospace, aviation, nuclear control, submarine system, military, etc. where higher safety and reliability are especially required.

In addition, even electronic components or functional modules that are used for the general electronic equipment, if the equipment or the electric circuit require high safety or reliability function or performances, a sufficient reliability evaluation check for safety shall be performed before commercial shipment and moreover, due consideration to install a protective circuit is strongly recommended at customer's design stage.

- The contents of this catalog are applicable to the products which are purchased from our sales offices or distributors (so called "TAIYO YUDEN' s official sales channel").  
It is only applicable to the products purchased from any of TAIYO YUDEN' s official sales channel.
- Please note that Taiyo Yuden Co., Ltd. shall have no responsibility for any controversies or disputes that may occur in connection with a third party's intellectual property rights and other related rights arising from your usage of products in this catalog. Taiyo Yuden Co., Ltd. grants no license for such rights.

#### ■ Caution for export

Certain items in this catalog may require specific procedures for export according to "Foreign Exchange and Foreign Trade Control Law" of Japan, "U.S. Export Administration Regulations", and other applicable regulations. Should you have any question or inquiry on this matter, please contact our sales staff.

# MULTILAYER EMI SUPPRESSION FILTERS



REFLOW

## FEATURES

- 2×1.25mm size EMI filter unifying multilayer capacitor and inductor T series with rapid attenuation characteristics and TZ series with effective maintaining of waveform quality of digital signal are lined up.
- Same shape as multilayer capacitor which is suitable for high speed mounting by automatic machine.

## APPLICATIONS

- Noise countermeasure in visual signal such as DVD, DSC, PDP, etc. (T series)
- Noise countermeasure and maintaining waveform quality in digital signal processing circuit in personal computer, communication equipment, etc. (TZ series)

## OPERATING TEMPERATURE RANGE

- -25~+85°C

## ORDERING CODE

[T Series]

FK 2125 0805 T 256 A L - T

1 Type: Multilayer EMI Suppression Filter

2 External dimensions (L×W) [mm]: 2125 (0805) 2.0×1.25

3 Equivalence circuit: T type

4 Cutoff frequency: example 186 (18 MHz), 256 (25 MHz)

5 Characteristic: example A (Sharp)

6 Rated Voltage [V]: L (10)

7 Packaging: -T (Tape & Reel)

8 Internal Code: △ (Standard products), △=Blank space

[TZ Series]

FK 2125 0805 TZ 201 C850 T

1 Type: Multilayer EMI Suppression Filter

2 External dimensions (L×W) [mm]: 2125 (0805) 2.0×1.25

3 Equivalence circuit: T type


4 Nominal Impedance [100MHz]: Z700 (70Ω), Z101 (100Ω), Z201 (200Ω)

5 Nominal Capacitance [1MHz]: C170 (17pF), C500 (50pF), C850 (85pF)

6 Packaging: T (Tape & Reel)

7 Internal Code: △ (Standard products), △=Blank space

## EXTERNAL DIMENSIONS/STANDARD QUANTITY



L	W	T	e <sup>1</sup>	e <sup>2</sup>	Standard Quantity [pcs] Embossed tape
2.0±0.2 (0.079±0.008)	1.25±0.2 (0.049±0.008)	1.0±0.2 (0.039±0.008)	0.3±0.2 (0.012±0.008)	0.4±0.2 (0.016±0.008)	3000

Unit : mm (inch)

## PART NUMBERS

### T Series

Ordering code	EHS (Environmental Hazardous Substances)	Cut-Off Frequency	insertion-loss [1MHz]	Characteristic attenuation								DC resistance max.	Rated Voltage	Rated current	Insulation resistance
				[50MHz]	[100MHz]	[200MHz]	[350MHz]	[500MHz]	[600MHz]	[800MHz]					
FK2125T186AL	RoHS	18MHz±3.6MHz	≤1.0dB	≥20dB	≥20dB	-	-	≥20dB	-	-	2Ω	10V DC	100mA DC	≥30MΩ	
FK2125T256AL	RoHS	25MHz±5MHz		≥15dB	≥20dB	-	-	≥20dB	-	-					
FK2125T406AL	RoHS	40MHz±10MHz		-	≥15dB	≥20dB	-	≥20dB	-	-					
FK2125T107AL	RoHS	100MHz±20MHz		-	-	≥20dB	-	≥20dB	-	-					
FK2125T167AL	RoHS	160MHz±30MHz		-	-	-	≥20dB	≥20dB	-	-					
FK2125T207AL	RoHS	200MHz±40MHz		-	-	-	≥20dB	≥20dB	-	-					
FK2125T407AL	RoHS	400MHz±80MHz		-	-	-	-	-	≥20dB	≥20dB					

### TZ Series

Ordering code	EHS (Environmental Hazardous Substances)	impedance (terminal1-3) [100MHz]	capacitance (terminal1-2) [1MHz]	DC resistance max.	Rated Voltage	Rated current	Insulation resistance
FK2125TZ700C170	RoHS	70Ω±30%	17pF±20%	2Ω	10V DC	100mA DC	≥30MΩ
FK2125TZ700C500	RoHS	70Ω±30%	50pF±20%				
FK2125TZ700C850	RoHS	70Ω±30%	85pF±20%				
FK2125TZ101C170	RoHS	100Ω±30%	17pF±20%				
FK2125TZ101C500	RoHS	100Ω±30%	50pF±20%				
FK2125TZ101C850	RoHS	100Ω±30%	85pF±20%				
FK2125TZ201C850	RoHS	200Ω±30%	85pF±20%				

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

# MULTILAYER EMI SUPPRESSION FILTERS

## PACKAGING


### ① Minimum Quantity

#### ● Taped package

Type	Thickness mm (inch)	Standard Quantity [pcs]
		Embossed tape
FK 2125 (0805)	1.0 (0.039)	3000


### ② Tape material

#### ● Embossed Tape

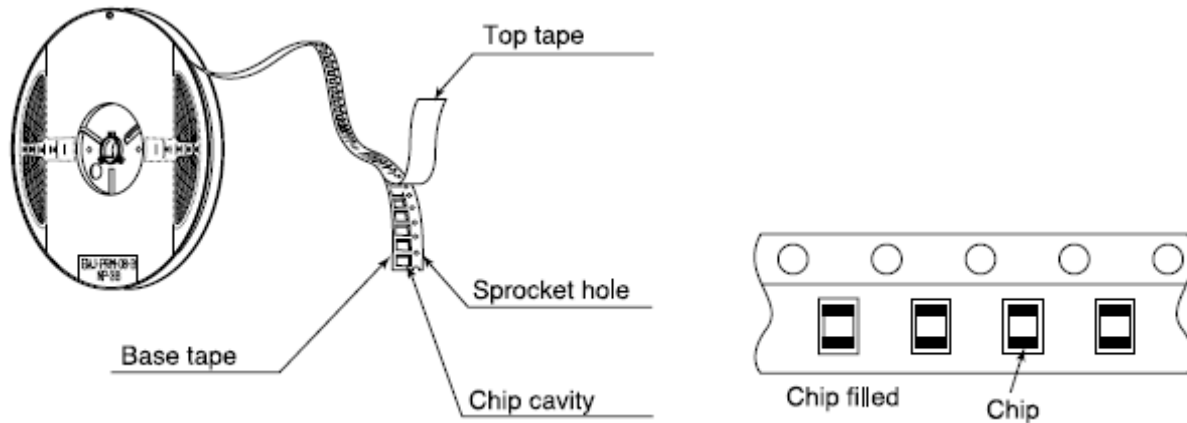

### ③ Taping dimensions


#### ● Embossed tape 8mm wide (0.031 inches wide)

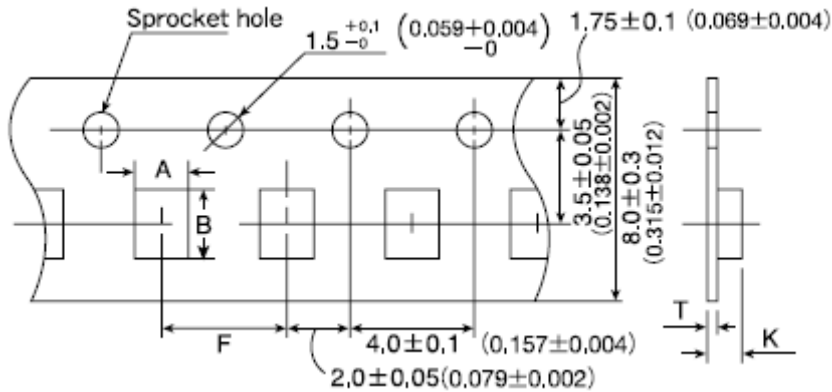

Type	Chip cavity		Insertion pitch	Tape thickness	
	A	B	F	K	T
FK 2125 (0805)	$1.5 \pm 0.2$ (0.059±0.008)	$2.3 \pm 0.2$ (0.091±0.008)	$4.0 \pm 0.1$ (0.157±0.004)	2.0 max. (0.079 max.)	0.3 max. (0.012 max.)


Unit : mm (inch)

### ④ Leader and Blank portion

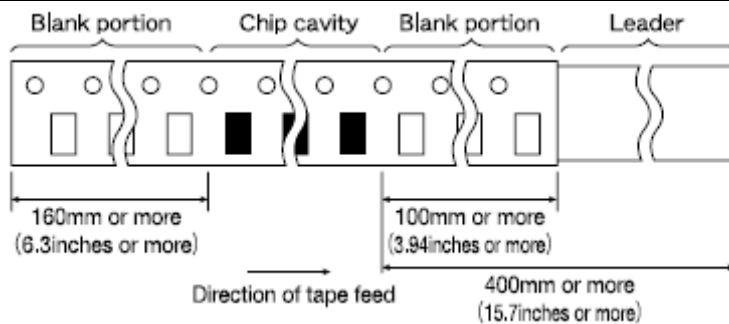

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).


⑤ Reel size

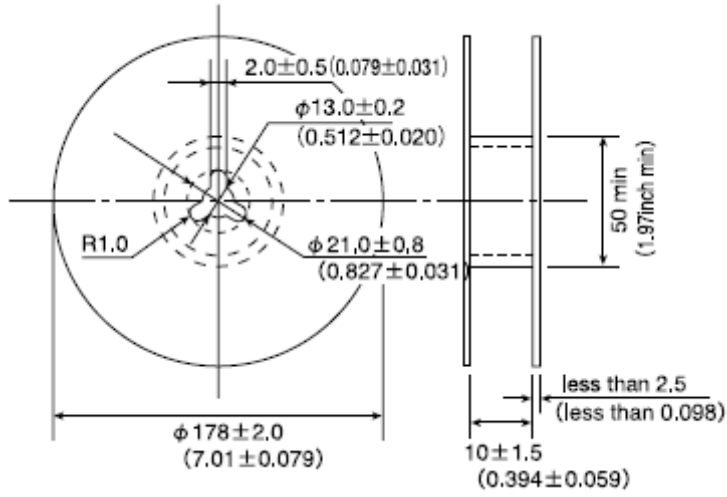

Unit : mm (inch)

⑥ Top tape strength


The top tape requires a peel-off force of 0.1~0.7N in the direction of the arrow as illustrated below.

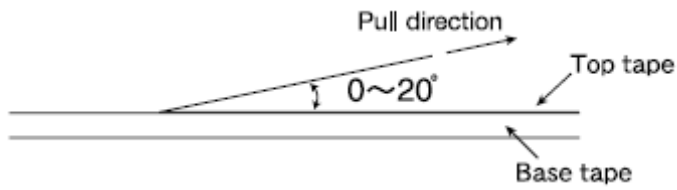

# MULTILAYER EMI SUPPRESSION FILTERS

## RELIABILITY DATA

1. Operating Temperature Range	
Specified Value	-25~+85°C
2. Storage Temperature Range	
Specified Value	-25~+85°C
3. Rated Voltage	
Specified Value	10V DC
4. Rated Current	
Specified Value	100mA DC
5. Cutoff frequency (T Series)	
Specified Value	18MHz±3.6MHz, 25MHz±5MHz, 40MHz±10MHz, 100MHz±20MHz, 160MHz±30MHz, 200MHz±40MHz, 400MHz±80MHz
Test Methods and Remarks	Measuring equipment : 8753D (or its equivalent) Measuring source : 0dBm Input-Output impedance : 50Ω
6. Impedance (TZ Series)	
Specified Value	70Ω±30%, 100Ω±30%, 200Ω±30%
Test Methods and Remarks	Measuring frequency : 100MHz Measuring equipment : 4291A (or its equivalent) Measuring jig : 16192A Measuring source : -20dBm
7. Capacitance (TZ Series)	
Specified Value	17pF±20%, 50pF±20%, 85pF±20%
Test Methods and Remarks	Measuring equipment : 4194A (or its equivalent) Measuring voltage : 0.5V Measuring frequency : 1MHz Capacitance measurement between Terminals 1 and 2.
8. DC Resistance	
Specified Value	2Ω max., 3Ω max. (FK2125T107AL)
Test Methods and Remarks	Conduct measurement between Terminals 1 and 3.
9. Insulation Resistance	
Specified Value	30MΩ min.
Test Methods and Remarks	Conduct measurement between Terminals 1 and 2. Applied voltage : 10VDC
10. Resistance to Flexure of Substrate	
Specified Value	No mechanical damage.
Test Methods and Remarks	Warp : 2mm Testing board : glass epoxy-resin substrate Thickness : 0.8mm



▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

11. Solderability																
Specified Value	At least 75% of terminal electrode is covered by new solder.															
Test Methods and Remarks	Solder temperature : $230 \pm 5^{\circ}\text{C}$ Duration : $4 \pm 1$ sec. Preheating temperature : $150$ to $180^{\circ}\text{C}$ Preheating time : $2$ to $3$ min. Flux : Immersion into methanol solution with colophony for $3$ to $5$ sec.															
12. Resistance to Soldering																
Specified Value	No significant abnormality in appearance.															
Test Methods and Remarks	Solder temperature : $260 \pm 5^{\circ}\text{C}$ Duration : $10 \pm 0.5$ sec. Preheating temperature : $150$ to $180^{\circ}\text{C}$ Preheating time : $2$ to $3$ min. Flux : Immersion into methanol solution with colophony for $3$ to $5$ sec.															
13. Thermal Shock																
Specified Value	No mechanical damage. Insulation resistance (between 1 and 2) : $20\text{M}\Omega$ min. DC resistance (between 1 and 3) : $2\Omega$ max. : $3\Omega$ max. (FK2125T107AL)															
Test Methods and Remarks	Conditions for 1 cycle <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Step</th> <th>Temperature (<math>^{\circ}\text{C}</math>)</th> <th>Duration (min)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Minimum operating temperature <math>+0/-3</math></td> <td><math>30 \pm 3</math></td> </tr> <tr> <td>2</td> <td>Room temperature</td> <td><math>2</math> to <math>3</math></td> </tr> <tr> <td>3</td> <td>Maximum operating temperature <math>+3/-0</math></td> <td><math>30 \pm 3</math></td> </tr> <tr> <td>4</td> <td>Room temperature</td> <td><math>2</math> to <math>3</math></td> </tr> </tbody> </table> Number of cycles : $5$ Recovery : $2$ to $3$ hrs of recovery under the standard condition after the test.	Step	Temperature ( $^{\circ}\text{C}$ )	Duration (min)	1	Minimum operating temperature $+0/-3$	$30 \pm 3$	2	Room temperature	$2$ to $3$	3	Maximum operating temperature $+3/-0$	$30 \pm 3$	4	Room temperature	$2$ to $3$
Step	Temperature ( $^{\circ}\text{C}$ )	Duration (min)														
1	Minimum operating temperature $+0/-3$	$30 \pm 3$														
2	Room temperature	$2$ to $3$														
3	Maximum operating temperature $+3/-0$	$30 \pm 3$														
4	Room temperature	$2$ to $3$														
14. Damp Heat steady state																
Specified Value	No mechanical damage. Insulation resistance (between 1 and 2) : $20\text{M}\Omega$ min. DC resistance (between 1 and 3) : $2\Omega$ max. : $3\Omega$ max. (FK2125T107AL)															
Test Methods and Remarks	Temperature : $40 \pm 2^{\circ}\text{C}$ Humidity : $90$ to $95\%RH$ Duration : $500 \pm 12$ hrs Recovery : $2$ to $3$ hrs of recovery under the standard condition after the removal from test chamber.															
15. Loading under Damp Heat																
Specified Value	No mechanical damage. Insulation resistance (between 1 and 2) : $20\text{M}\Omega$ min. DC resistance (between 1 and 3) : $2\Omega$ max. : $3\Omega$ max. (FK2125T107AL)															
Test Methods and Remarks	Temperature : $40 \pm 2^{\circ}\text{C}$ Humidity : $90$ to $95\%RH$ Applied voltage : Rated voltage (between 1 and 2) Applied current : Rated current (between 1 and 3) Duration : $500 \pm 12$ hrs Recovery : $2$ to $3$ hrs of recovery under the standard condition after the removal from test chamber.															
16. Loading at High Temperature																
Specified Value	No mechanical damage. Insulation resistance (between 1 and 2) : $20\text{M}\Omega$ min. DC resistance (between 1 and 3) : $2\Omega$ max. : $3\Omega$ max. (FK2125T107AL)															
Test Methods and Remarks	Temperature : $85 \pm 2^{\circ}\text{C}$ Applied voltage : Rated voltage (between 1 and 2) Applied current : Rated current (between 1 and 3) Duration : $500 \pm 12$ hrs Recovery : $2$ to $3$ hrs of recovery under the standard condition after the removal from test chamber.															

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

---

Note on standard condition :

“standard condition” referred to herein is defined as follows :

5 to 35°C of temperature, 45 to 85% relative humidity and 86 to 106kPa of air pressure.

When there are questions concerning measurement results:

In order to provide correlation data, the test shall be conducted under condition of  $20 \pm 2^\circ\text{C}$  of temperature, 60 to 70% relative humidity and 86 to 106kPa of air pressure.

Unless otherwise specified, all the tests are conducted under the “standard condition.”

※Circuit diagram

