

SMD Power Inductor CDR6D23MN



Description

- Ferrite drum core construction.
- Magnetically shielded.
- L × W × H: 6.8 × 6.8 × 2.5 mm Max.
- Product weight: 0.27g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

Environmental Data

- Operating temperature range: -40°C ~ +105°C (including coil's self temperature rise)
- Storage temperature range: -40°C ~ +105°C
- Solder reflow temperature: 260 °C peak.


Packaging

- Carrier tape and reel packaging
- 11.8" diameter reel
- 1500pcs per reel


Applications

- Ideally used in LCD driver, DSC/DVC , Notebook PC or the other portable equipment

Dimension - [mm]

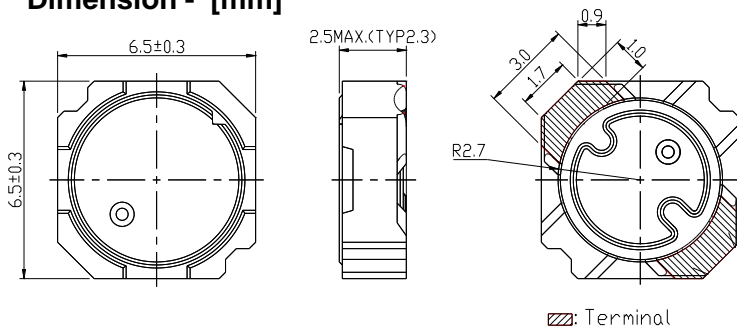

Land pattern and Schematics - [mm]

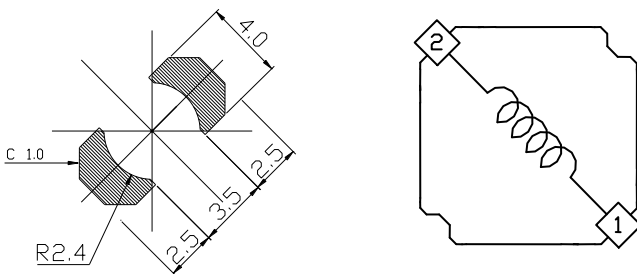



Electrical Characteristics

| Part Name | Stamp | Inductance (μH) [Within] ※1 | D.C.R. (m Ω) Max. (Typ.) (at 20°C) | Saturation Current (A) ※2 | | Temperature Rise Current (A)※3 |
|-------------------|-------|--|--|------------------------------|------------|--------------------------------------|
| | | | | (at 20°C) | (at 105°C) | |
| CDR6D23MNNP-0R6NC | 0R6 | 0.6 $\mu\text{H} \pm 25\%$ | 20.0(16) | 6.55 | 4.95 | 4.60 |
| CDR6D23MNNP-1R0NC | 1R0 | 1.0 $\mu\text{H} \pm 25\%$ | 25.0(20) | 5.15 | 4.00 | 3.90 |
| CDR6D23MNNP-1R5NC | 1R5 | 1.5 $\mu\text{H} \pm 25\%$ | 28.0(22) | 4.40 | 3.55 | 3.30 |
| CDR6D23MNNP-2R0NC | 2R0 | 2.0 $\mu\text{H} \pm 25\%$ | 36.3(29) | 3.85 | 3.05 | 2.60 |
| CDR6D23MNNP-2R7NC | 2R7 | 2.7 $\mu\text{H} \pm 25\%$ | 40.0(32) | 3.30 | 2.60 | 2.38 |
| CDR6D23MNNP-3R3NC | 3R3 | 3.3 $\mu\text{H} \pm 25\%$ | 46.3(37) | 2.95 | 2.30 | 2.25 |
| CDR6D23MNNP-4R2NC | 4R2 | 4.2 $\mu\text{H} \pm 25\%$ | 52.5(42) | 2.60 | 2.10 | 2.05 |
| CDR6D23MNNP-5R1NC | 5R1 | 5.1 $\mu\text{H} \pm 25\%$ | 60.0(48) | 2.45 | 1.95 | 1.90 |
| CDR6D23MNNP-6R1NC | 6R1 | 6.1 $\mu\text{H} \pm 25\%$ | 66.3(53) | 2.30 | 1.75 | 1.80 |
| CDR6D23MNNP-7R2NC | 7R2 | 7.2 $\mu\text{H} \pm 25\%$ | 72.5(58) | 2.10 | 1.60 | 1.70 |
| CDR6D23MNNP-8R3NC | 8R3 | 8.3 $\mu\text{H} \pm 25\%$ | 80.0(64) | 1.95 | 1.50 | 1.50 |
| CDR6D23MNNP-100NC | 100 | 10 $\mu\text{H} \pm 25\%$ | 103.8(83) | 1.75 | 1.40 | 1.30 |
| CDR6D23MNNP-120NC | 120 | 12 $\mu\text{H} \pm 25\%$ | 117.5(94) | 1.55 | 1.25 | 1.25 |
| CDR6D23MNNP-150NC | 150 | 15 $\mu\text{H} \pm 25\%$ | 133.8(107) | 1.40 | 1.15 | 1.10 |
| CDR6D23MNNP-180NC | 180 | 18 $\mu\text{H} \pm 25\%$ | 158.8(127) | 1.30 | 1.05 | 1.00 |
| CDR6D23MNNP-220NC | 220 | 22 $\mu\text{H} \pm 25\%$ | 187.5(150) | 1.20 | 0.95 | 0.80 |
| CDR6D23MNNP-270NC | 270 | 27 $\mu\text{H} \pm 25\%$ | 255.0(204) | 1.05 | 0.85 | 0.75 |
| CDR6D23MNNP-330NC | 330 | 33 $\mu\text{H} \pm 25\%$ | 275.0(220) | 0.95 | 0.75 | 0.70 |
| CDR6D23MNNP-390NC | 390 | 39 $\mu\text{H} \pm 25\%$ | 393.8(315) | 0.90 | 0.70 | 0.58 |
| CDR6D23MNNP-470NC | 470 | 47 $\mu\text{H} \pm 25\%$ | 456.3(365) | 0.80 | 0.60 | 0.54 |
| CDR6D23MNNP-560NC | 560 | 56 $\mu\text{H} \pm 25\%$ | 481.2(385) | 0.75 | 0.58 | 0.51 |
| CDR6D23MNNP-680NC | 680 | 68 $\mu\text{H} \pm 25\%$ | 751.3(601) | 0.65 | 0.53 | 0.45 |
| CDR6D23MNNP-820NC | 820 | 82 $\mu\text{H} \pm 25\%$ | 803.8(643) | 0.60 | 0.47 | 0.43 |
| CDR6D23MNNP-101NC | 101 | 100 $\mu\text{H} \pm 25\%$ | 903.8(723) | 0.55 | 0.44 | 0.41 |

※1. Inductance measuring condition: at 100kHz.

※2. Saturation current: The value of D.C. current when the inductance decreases to 65% of it's nominal value.













※3. Temperature rise current: The value of D.C. current when the temperature rise is $\Delta t = 40^\circ\text{C}$ ($T_a = 20^\circ\text{C}$).

SMD Power Inductor CDR6D23MN



Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) — ΔT

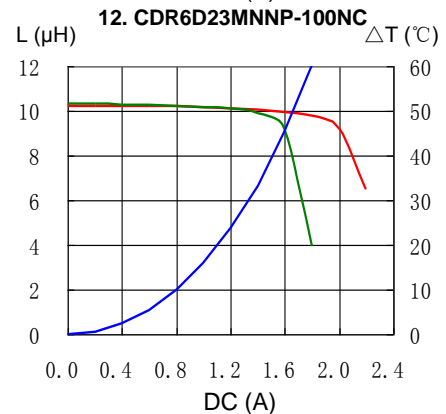
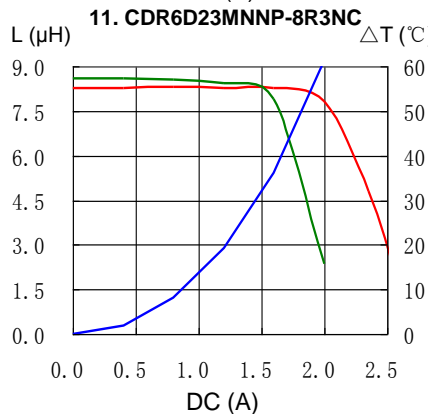
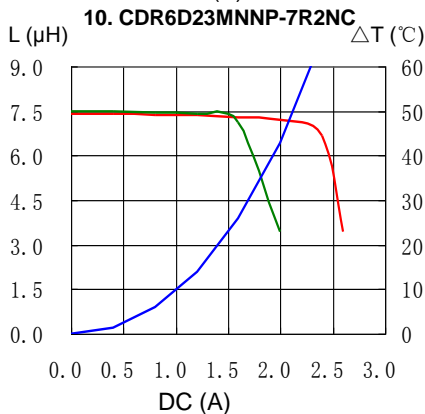
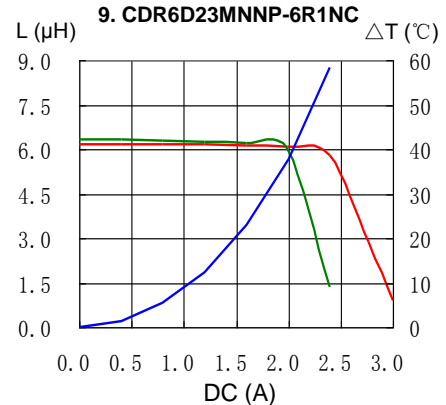
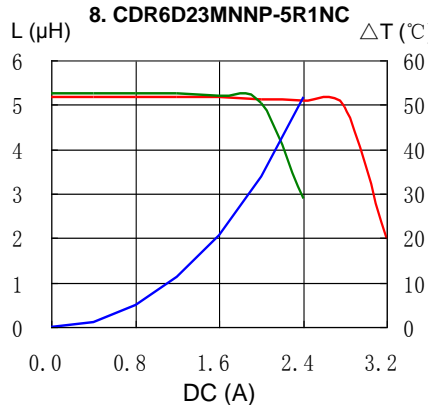
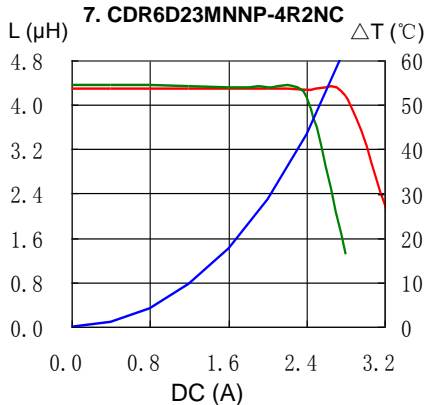
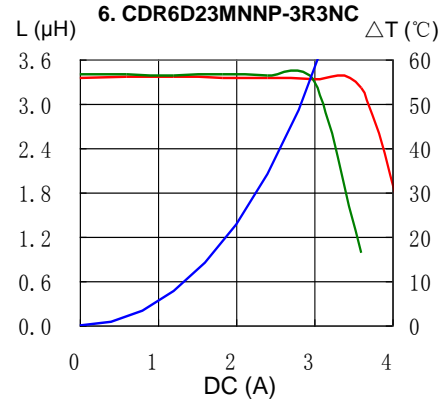
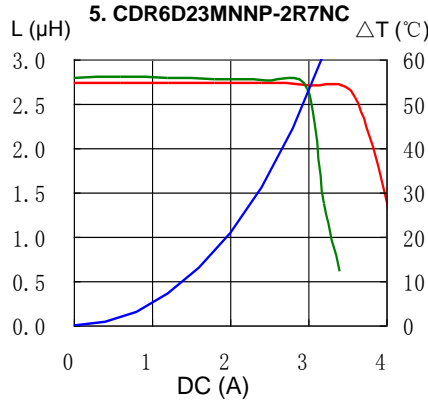
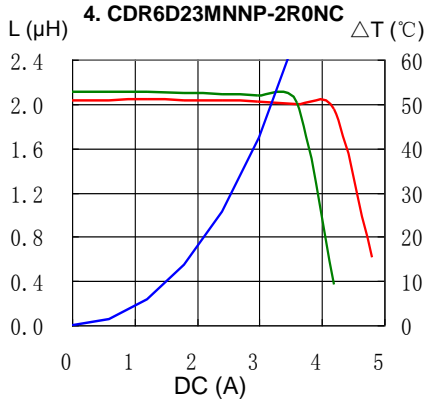
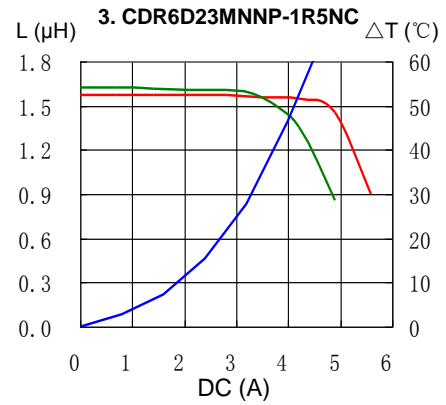
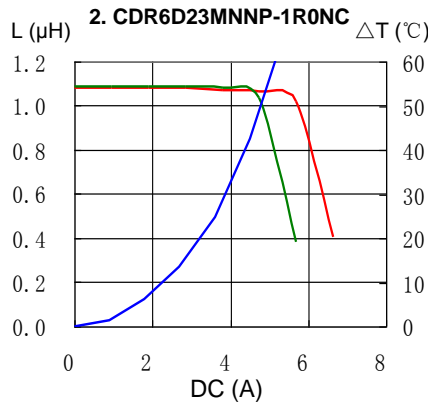
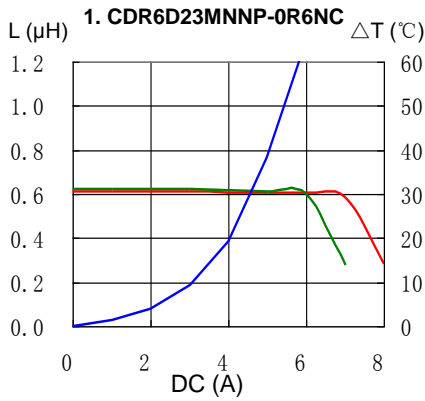


SMD Power Inductor CDR6D23MN




Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) — ΔT

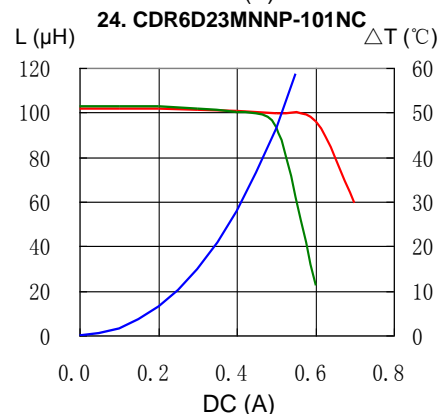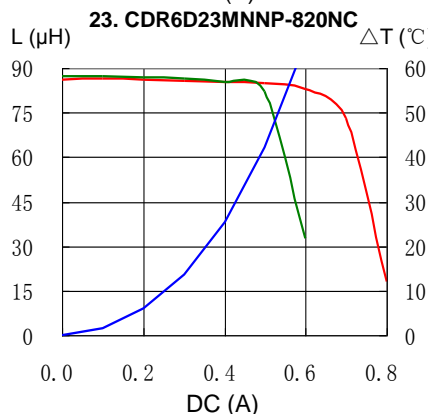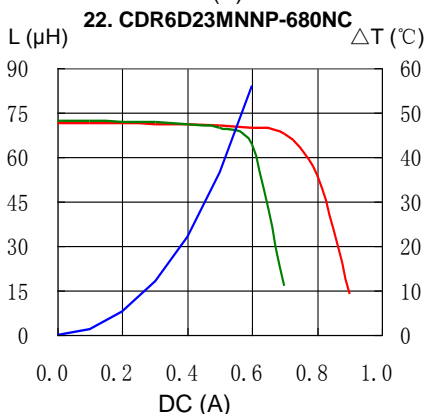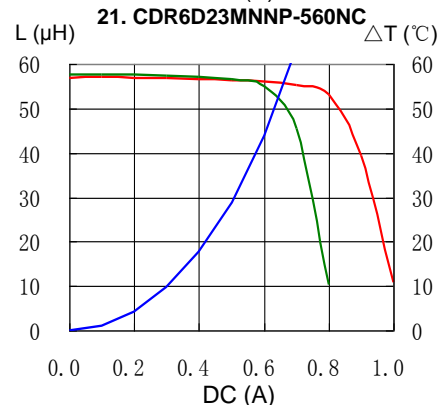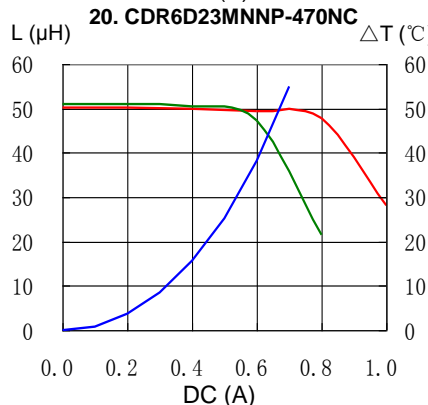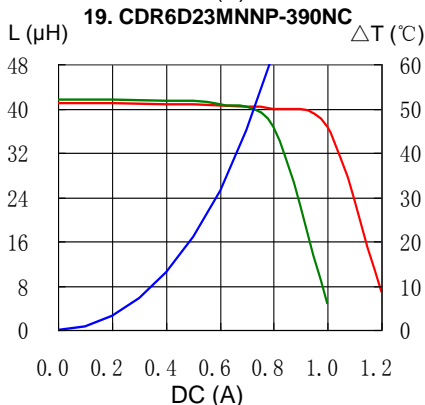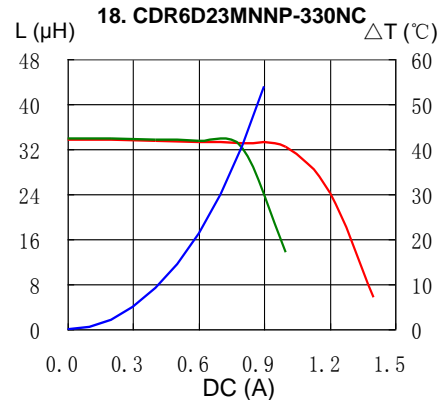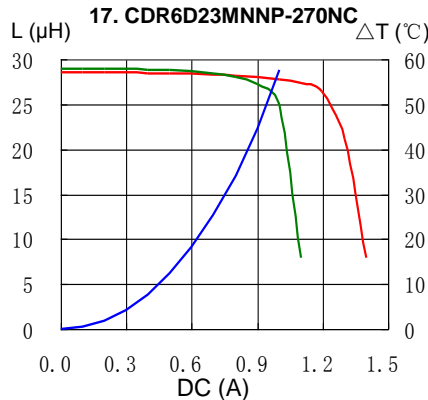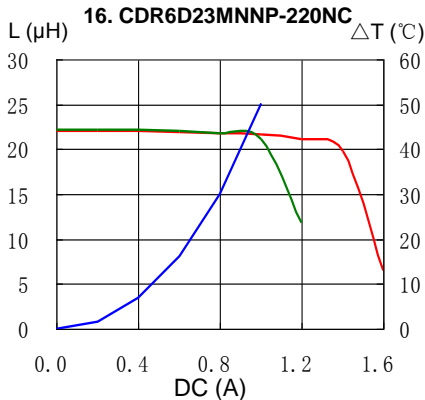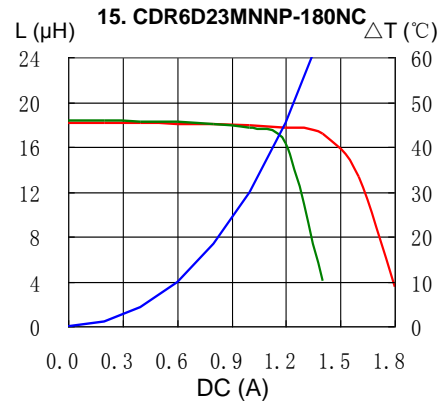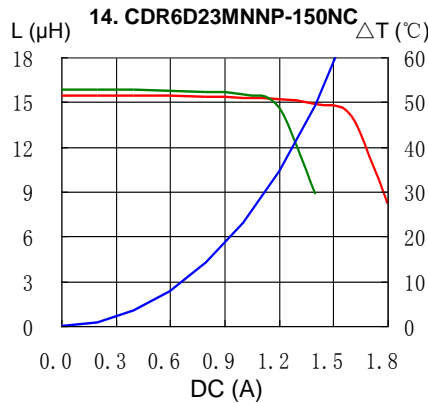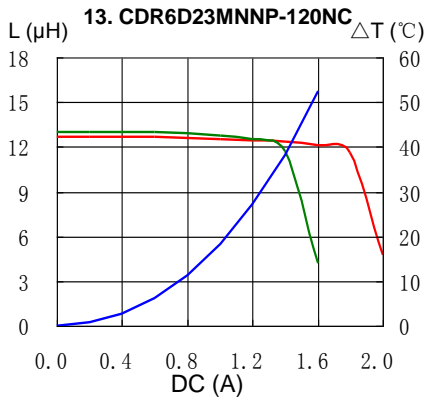


SMD Power Inductor CDR6D23MN

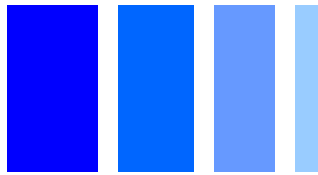


Solder Reflow Condition

Heat Endurance

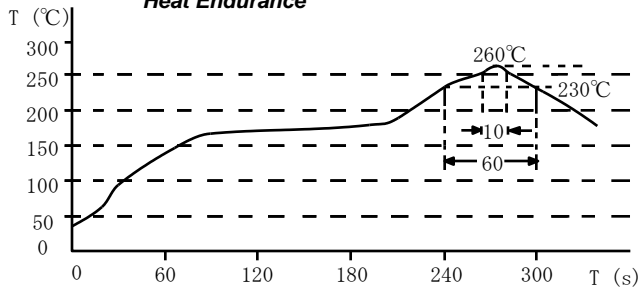

Temperature Chart

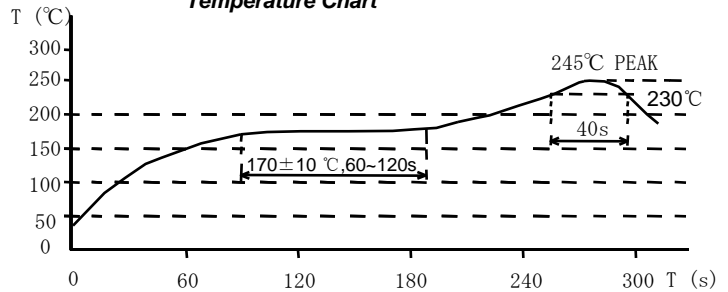

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel.+852-2880-6781
FAX.+852-2565-9600
sales@hk.sumida.com

Saitama(Japan)

Tel.+81-48-691-7300
FAX.+81-48-691-7340
sales@jp.sumida.com

Chicago

Tel.+1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel.+86-21-5836-3299
FAX.+86-21-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel.+82-2-6237-0777
FAX.+82-2-6237-0778
sales@kr.sumida.com

Obernzell

Tel.+49-8591-937-0
FAX. +49-8591-937-103
contact@eu.sumida.com

Shenzhen

Tel.+86-755-8291-0228
FAX.+86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel.+65-6296-3388
FAX.+65-6841-4426
sales@sg.sumida.com

Neumarkt

Tel.+49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei

Tel.+886-2-8751-2737
FAX.+886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel.+1-408-321-9660
FAX.+1-408-321-9308
sales@us.sumida.com