
			0	₿   >		
ØS~						
			LAYOUT SHOWN AS EXAMPL	E	-	
	Keying Shown as example					
CHARACTERISTICS	Connector dimension					
-Standard : Based on MIL-DTL-38999 Series III	DimNominalØS44.9 Max					
-Shell Material : Aluminium -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy	Z 31 Max VV THREAD M34x1-6g		SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)			
-Seals & Grommet : Silicon Elastomer			Country	Jurisdiction & Control List		
-Contact Plating : Gold over copper Alloy 0.8µm minimum			FR Not Listed			
-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories			PN: 8D523F21PB			
-Temperature Range -65°C to +200°C						
-Salt Spray : 48 hours		A 06-10-2010	5 First Release			
Mass : 50.49 g ± 10%		ISS DATE Designed By:	Latest modification - by Date:	CUSTOMER DRAWING	MOD N°	
		TITLE				
		6015				
BASIC SERIES: 8D 5 - 23 F SHELL TYPE : Plug with RFI Shielding	21 P B	SCALE	General linear Tolerances:	NPRDS / PROJECT <b>859</b>		
CONTACT TYPE : Standard Crimp Contact	ORIEN		This document is the property of SOURIAU			
SHELL SIZE : 23	CONTACT TYPE : PIN(50	CONTACT TYPE : PIN(500 Matings)				
PLATING : F = Nickel	CONTACT LAYO		SOURIAU DR	G N°	SHEET	
		A3	8D523F21PI		1/2	

r	Ŧ	۵	н <b>г</b>	m		0
		Contact Layout				
4	_	$\begin{array}{c} & \\ & \\ & \\ & \\ & \\ & \\ & \\ & \\ & \\ & $				
	Contact position ID  Local X-axis (mm)    A  +.128 (3.25)    B  +.289 (7.34)	Y-axis (mm)  Contact position ID  X-axis (mm)  Y-axis    + 385 (9 78)  M  - 289 (7 34)  + 285 (7 24)				
ω	C  +.386 (9.80)    D  +.400 (10.16)    E  +.326 (8.33)    F  +.183 (4.65)    G  +.000 (10.01)    H 183 (4.65)    J 328 (8.33)    K 400 (10.16)    L 386 (9.80)    Shell  no.  con	+.285 (7.24)  N 128 (3.25)  +.385 (9.78)    +.123 (3.12)  P  +.000 (0.00)  +.246 (6.22)   065 (1.65)  R  +.160 (4.06)  +.146 (3.71)   339 (6.07)  S  +.214 (5.44) 035 (1.89)   362 (9.19)  T  +.094 (2.39) 194 (4.93)   362 (9.19)  V 214 (5.44) 035 (0.89)   239 (6.07)  W 214 (5.44) 035 (0.89)   239 (6.07)  V 214 (5.44) 035 (0.89)   239 (6.07)  V 114 (5.44) 035 (0.89)   239 (6.07)  V 160 (4.06)  +.146 (3.71)   065 (1.65)  X  +.000 (0.00)  +.000 (0.00)    +.123 (3.12)       ber of  Size  Service  Contact  Supersedi    tacts  cantacts  rating  Ail  MS20056-	- - 			
	F					
						SOURIAU shall not be liable for a due to a use of the Products v the Specifications issued by either (professional recommend
N						
					A 06-10-20 ISS DATE Designed By:	PN: 8D523
					TITLE	Alumi
					SCALE NA	General linear Tolerances: ±
					FORMAT	U WWW.SOURIAU. SOURIAU
					A3	8D523F
	Н	G	F	E	D	C

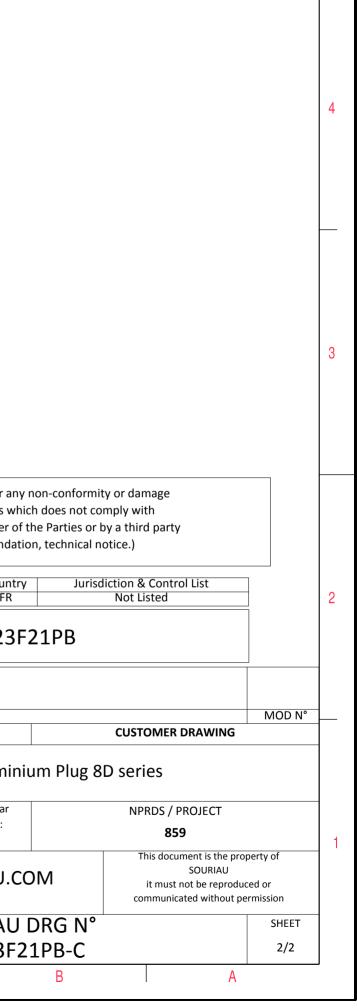

 $\triangleright$ 

σ