



# XBEE-PRO<sup>®</sup> 900HP DIGIMESH<sup>®</sup> KIT

Provides a hands-on way to learn how to use XBee-PRO 900HP modules for device connectivity and sensor networking using the innovative DigiMesh protocol

Digi's XBee-PRO 900HP DigiMesh Kit is a great way to learn how to use XBee RF modules for device connectivity and true peer-to-peer mesh device networking with our DigiMesh protocol. DigiMesh is a proprietary networking topology that supports advanced networking features including sleeping routers and dense mesh networks.

Mesh networking is a powerful way to route data. Range is extended by allowing data to hop from node to node, and reliability is increased by "self-healing," the ability to create alternate paths when one node fails or a connection is lost. DigiMesh is a peer-to-peer mesh network which allows all devices on the network to sleep, ideal for low-power applications.

This kit is designed for anyone interested in getting started in the world of XBee. Hardware and software engineers, corporate technologists, or educators and students can quickly learn more about DigiMesh technology through hands-on examples in the kit, utilizing XBee-PRO DigiMesh modules.

## XBee-PRO 900HP Modules Included in the Kit

XBee-PRO 900HP RF modules provide embedded wireless connectivity to low-power devices that require best-in-class range in the 900 MHz band. They take advantage of the DigiMesh networking protocol, featuring dense network operation and support for sleeping routers, and are also available in a proprietary point-to-multipoint configuration. The modules support RF line-of-sight ranges up to 9 miles (with high-gain antennas), and data rates of up to 200 Kbps.

## The Kit Includes:

- ✓ 3 XBee Grove Development Boards
- ✓ 3 XBee-PRO 900HP Modules
- ✓ 3 Micro-USB Cables
- ✓ 2 XBee Stickers

NUMBER	DESCRIPTION
XKB9-DMT-UHP	XBee-PRO 900HP DigiMesh Kit (US/Canada)
XKB9-DMT-AHP	XBee-PRO 900HP DigiMesh Kit (Australia)
XKB9-DMT-BHP	XBee-PRO 900HP DigiMesh Kit (Brazil)
XKB9-DMT-SHP	XBee-PRO 900HP DigiMesh Kit (Singapore)

The XBee-PRO 900HP requires no programming and can be configured easily using Digi's free XCTU software or via our simplified AT command set. XBee modules are pre-certified for use in multiple countries, further reducing development costs and time to market.



HARDWARE

<b>PROCESSOR</b>	ADF7023 transceiver, Cortex-M3 EFM32G230 @ 28 MHz; Programmable includes: Freescale MC9S08QE32
<b>FREQUENCY BAND</b>	902 to 928 MHz, software selectable channel mask for interference immunity
<b>ANTENNA OPTIONS</b>	Wire, U.FL and RPSMSA
<b>PERFORMANCE</b>	
<b>RF DATA RATE</b>	10 Kbps or 200 Kbps
<b>INDOOR/URBAN RANGE</b>	10 Kbps: up to 2000 ft (610 m); 200 Kbps: up to 1000 ft (305 m)
<b>OUTDOOR/ LINE-OF-SIGHT RANGE</b>	10 Kbps: up to 9 miles (15.5 km); 200 Kbps: up to 4 miles (6.5 km) (with 2.1dB dipole antennas)
<b>TRANSMIT POWER</b>	Up to 24 dBm (250 mW) software selectable
<b>RECEIVER SENSITIVITY</b>	-101 dBm @ 200 Kbps, -110 dBm @ 10 Kbps

FEATURES

<b>DATA INTERFACE</b>	UART (3V), SPI
<b>GPIO</b>	Up to 15 Digital I/O, 4 10-bit ADC inputs, 2 PWM outputs
<b>NETWORKING TOPOLOGIES</b>	DigiMesh, Repeater, Point-to-Point, Point-to-Multipoint, Peer-to-Peer
<b>SPREAD SPECTRUM</b>	FHSS (Software Selectable Channels)

PROGRAMMABILITY


<b>MEMORY</b>	N/A	32 KB Flash / 2 KB RAM
<b>CPU/CLOCK SPEED</b>	N/A	HCS08 / Up to 50.33 MHz

POWER

<b>SUPPLY VOLTAGE</b>	2.1 to 3.6 VDC	2.4 to 3.6 VDC
<b>TRANSMIT CURRENT</b>	215 mA	229 mA
<b>RECEIVE CURRENT</b>	29 mA	44 mA
<b>SLEEP CURRENT</b>	2.5 uA	3 uA

REGULATORY APPROVALS

<b>FCC (USA)</b>	MCQ-XB900HP
<b>IC (CANADA)</b>	1846A-XB900HP
<b>C-TICK (AUSTRALIA)</b>	Yes
<b>ANATEL (BRAZIL)</b>	Yes
<b>IDA (SINGAPORE)</b>	Yes

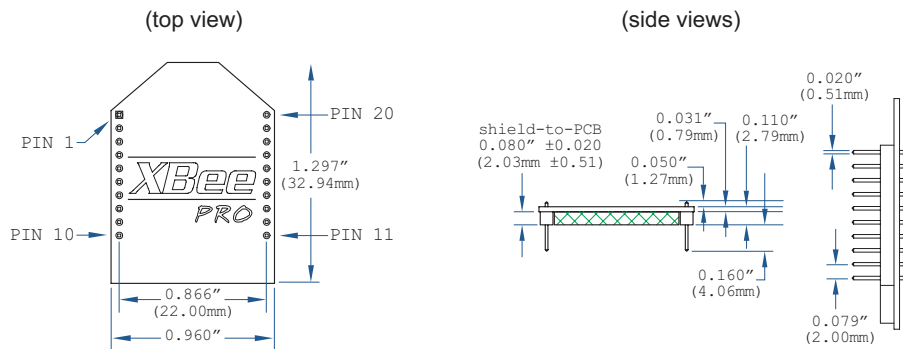

It's the easy and fast way to build a hardware prototype and integrate it into an Internet application. To learn more visit [www.digi.com](http://www.digi.com).

877-912-3444 | 952-912-3444

