
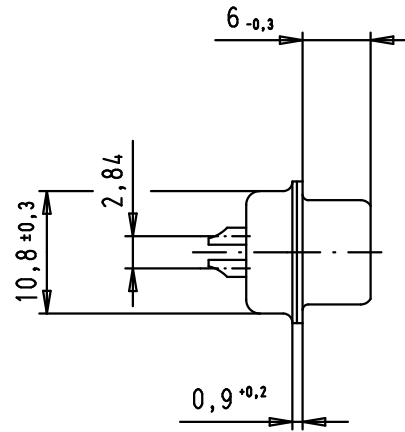



5 4 3 2 1

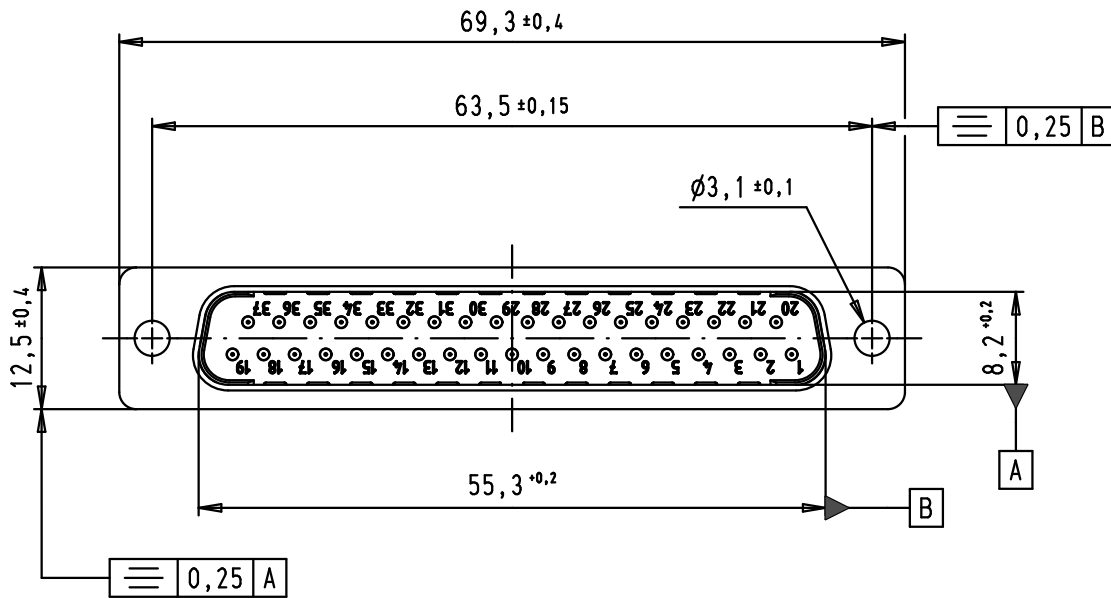


SPECIFICATIONS

Performance level	PL2
Filter type	C
Capacitance	47 pF±20%
Working voltage	100 V
Current rating	7,5 A
Insulation resistance	>1 GΩ

FREQUENCY (MHz)	ATTENUATION (dB)
5	-
10	-
50	-
100	-
500	30
1000	35

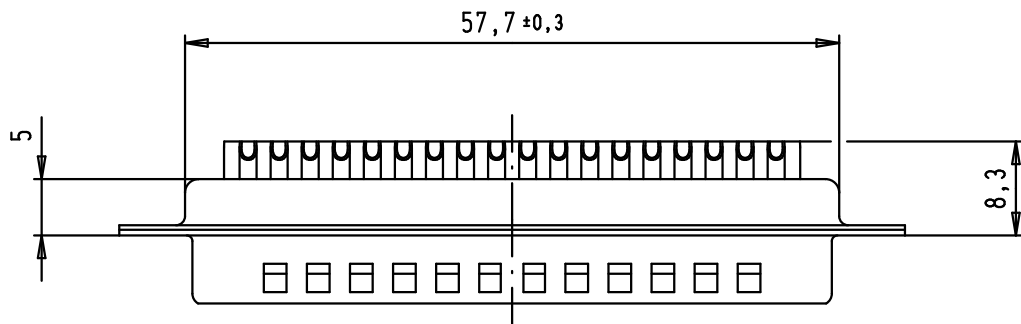

Solder buckets for AWG 20

				Mod.	Det.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub, male, straight, 37 poles, turned solder buckets	Maßstab/ Scale 1,5:1
			Detail.	08/07/02	CV				
36283	12/01/12	SD	Insp.	12/01/12	JB				
35300	01/12/08	PK	Stand.						
33800	21/08/06	PK							
31058	08/07/02	CV	HARTING EURL F-95972 Paris			TB 09 64 421 7210 Sub.	Blatt/ Page 1 / 1		