


Electrical Characteristics Data

0402 X5R 1.0uF 6.3V (0402X105K6R3CT)

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0402 (1005)	1.00±0.05	0.5±0.05	0.5±0.05


2. Cap, DF, IR @25°C

(Cap, DF @ 1KHz, 1Vrms ; IR @ 6.3V, 120sec)

Item	Spec
Cap [uF]	1.0 (±10%)
DF	≤ 15%
IR [M-ohm]	100 min


3. Impedance/ESR-Frequency

(Equipment: 4294A)

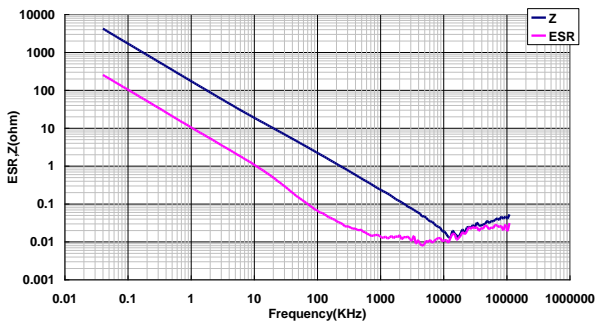

4. Capacitance – Temperature Characteristics


(Equipment: 4284A)

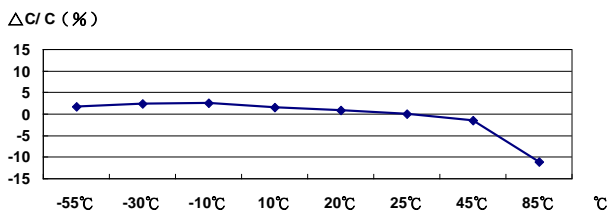

5. Capacitance – DC Voltage Characteristics

(Equipment: 4284A; DC charge 60±5sec)

3V : -15.85% ; 6.3V : -47.68%

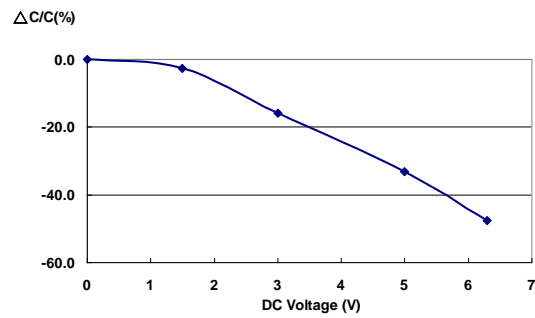

6. Capacitance – AC Voltage Characteristics

(Equipment: 4284A; AC charge 60±5sec)

