
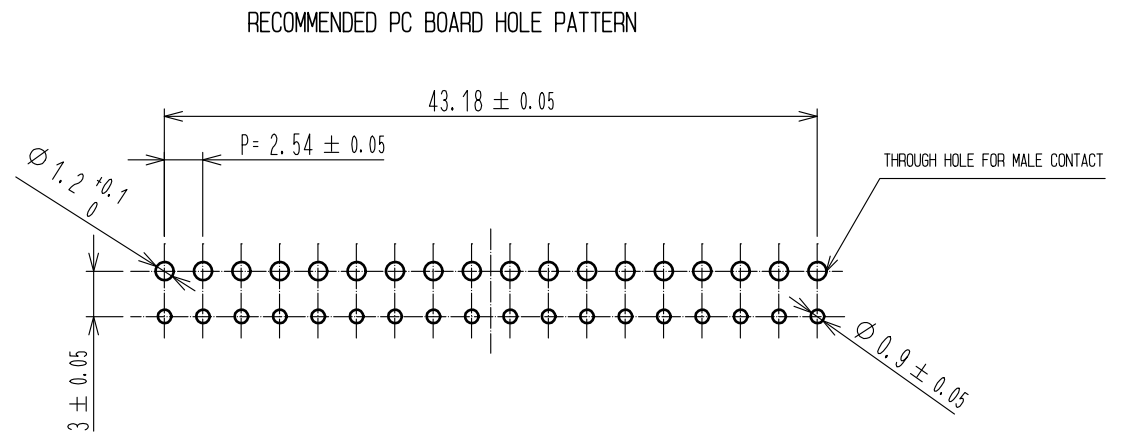

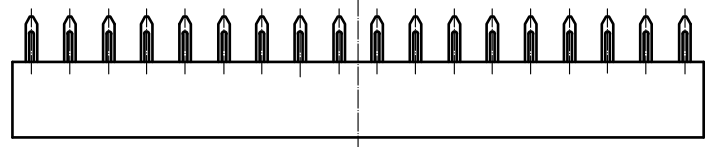
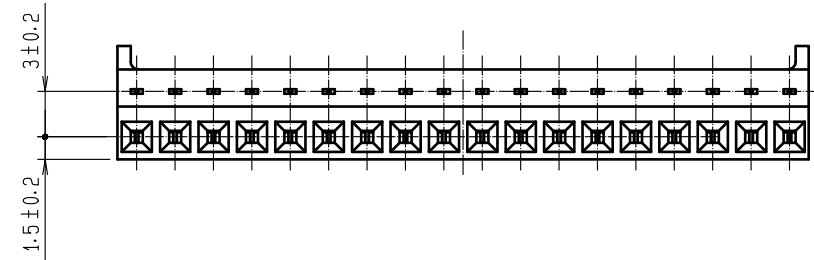
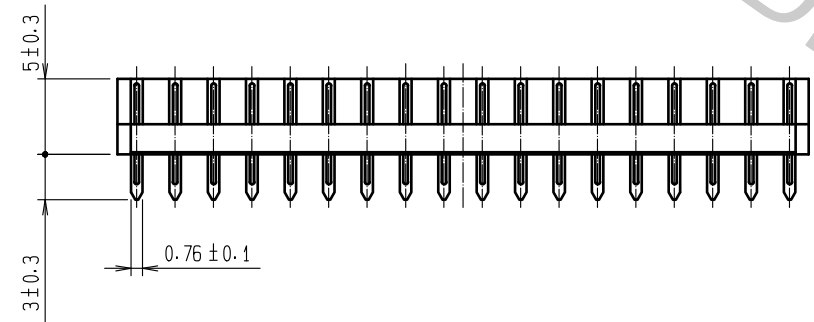


Aug.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case that the application demands a high level of reliability, such as automotive,
 please contact a company representative for further information.

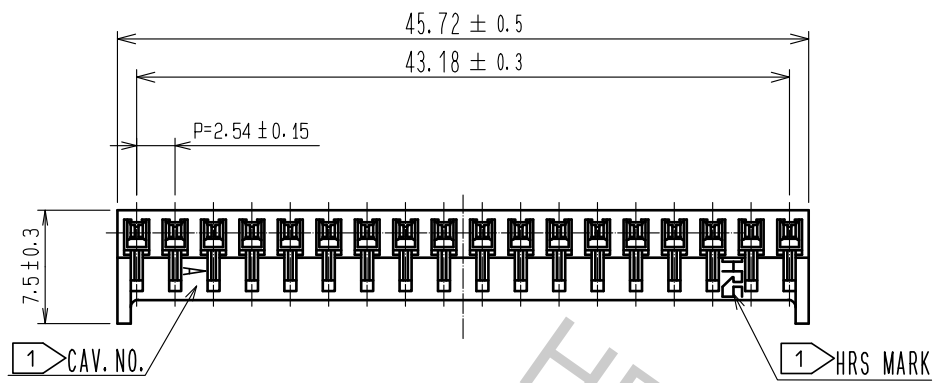

1 INDICATION OF CAV. NO. AND HRS MARK CAN BE ROTATED BY 180°

1	POLYAMIDE	UL94V-0, BLACK	2	PHOSPHOR BRONZE	CONTACT AREA:GOLD PLATED 0.2µm min LEAD AREA:TIN PLATED 1µm min UNDER PLATING :NICKEL 1µm min		
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HRS HIROSE ELECTRIC CO., LTD.		APPROVED :MO. ISHIDA	17.02.03	DRAWING NO. EDC-020137-96-00			
		CHECKED :TS. MIYAZAKI	17.02.03	PART NO. MDF7-18S-2.54DSA(96)			
		DESIGNED :NY. YAMASHIRO	17.02.02	CODE NO. CL547-0013-7-96			
		DRAWN :SN. NUMAZAKI	17.02.02			1/1	