


UMK- 4 RM 24

Order No.: 2971344


The illustration shows a version for 4 pluggable miniature switching relays or miniature optocouplers

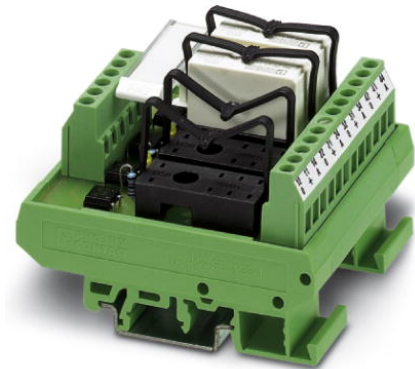

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2971344>

VARIOFACE module, for 4 plug-in miniature relays or miniature optocouplers, with LED, 24 V AC/DC input voltage



Commercial data	
GTIN (EAN)	 4 017918 088330
sales group	G053
Pack	1 pcs.
Customs tariff	85364190
Catalog page information	Page 300 (IF-2009)

Product notes

WEEE/RoHS-compliant since:
06/08/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Input data	
Nominal input voltage U_N	24 V AC/DC $\pm 10\%$
Input voltage range in reference to U_N	0.8 ... 1.1
Typical input current at U_N	2 mA
Type of protection	Bridge rectifier

Protective circuit/component	Bridge rectifier
Status display/channel	Yellow LED

Output data

Contact type	1 PDT
Maximum switching voltage	250 V AC/DC
Limiting continuous current	6 A
Maximum inrush current	8 A
Error detection (line break / short-circuit)	no

General data

No. of channels	4
Compatible components	Miniature relays or miniature optocouplers
With components	No
Width	67.5 mm
Height	77 mm
Depth	59 mm
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Test voltage	2.5 kV (50 Hz, 1 min.)
Test voltage input/output	2.5 kV AC
Standards/regulations	DIN VDE 0110
Mounting position	Any
Assembly instructions	In rows with zero spacing
Housing insulation material	PVC, side panel PA non-reinforced,
Color	green

Connection data

Type of connection	Screw connection
Number of positions	6
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Screw thread	M3

Stripping length	8 mm
Type of connection	Screw connection
Number of positions	3
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Screw thread	M3
Stripping length	8 mm

Certificates / Approvals




Certification

GOST

Diagrams/Drawings

Circuit diagram

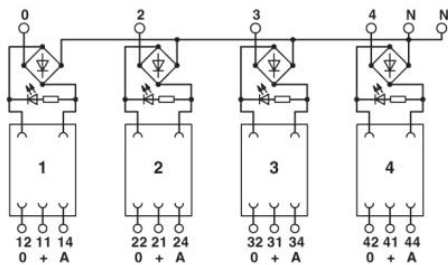

UMK- 4 RM 24 Order No.: 2971344

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2971344>

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;