

T	G	нт — — — — — — — — — — — — — — — — — — —	m	0



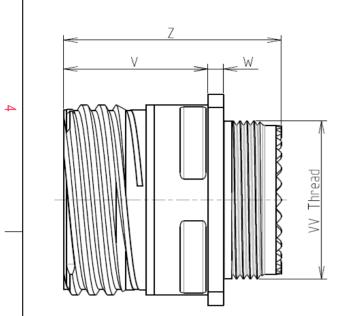

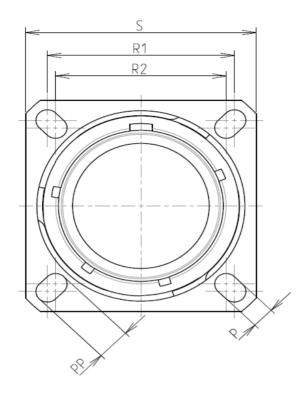

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Mass

BASIC SERIES:

SHELL SIZE : 13

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Stainless Steel			
	-Shell Plating	: Nickel			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
N	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	65°C to +200°C			
	-Salt Spray	: 500 hours			

: 38.69 g ± 10%

8D 0

G

13

S

26

А

F

Ν

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	23.01		
R2	20.62		
S	28.6±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M18x1-6g		


ORIENTATION : N

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 13-26

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

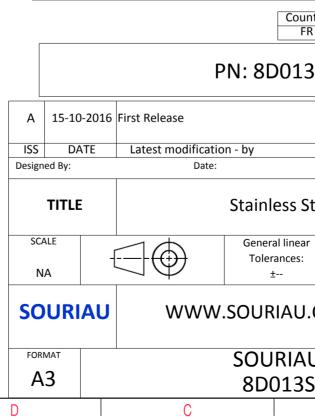

	ω		A		_
	R	1			4
	AMPLE				3
s whic er of t idatio	non-conformit th does not co he Parties or t on, technical n	mply with by a third par otice.)	ty		
Intry R	Jurisd	iction & Con Not Listed	trol List		2
3S26AN					
		CUSTONE		MOD N°	
Stee	CUSTOMER DRAWING Steel Receptacle 8D series				
ar		NPRDS /	PROJECT		
			59		1
J.CC	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
	DRG N°			SHEET	
S2(6AN-C	I		1/2	J
	В		А		

_	T	G	п П	m	D	0
		Contact Layout				Panel Cutou
4	(26			22 -	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
_		6#22D			¥	
ω	Ctc A B C D E F 1 2	13-26 X Y 0 3.47 2.47 4.34 2.47 -4.34 0 -3.47 -2.47 -4.34 -2.47 4.34 3.25 0 -3.25 0				Dim ØA ØA R1 ØT
	+					SOURIAU shall not be liable for any
						due to a use of the Products wh the Specifications issued by either of (professional recommendat
\sim						Countr FR
					A 15-10-202	PN: 8D013S
_					ISS DATE Designed By:	Latest modification - by Date:
					TITLE	Stainless Ste
→					SCALE NA	General linear Tolerances: ±
					SOURIAU	J WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D013S2
	Н	G	F	E	D	C

