


NOTES:

1. RoHS COMPLIANT
2. SUITABLE FOR WAVESOLDERING
3. METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
4. INSULATORS: HIGH TEMPERATURE PLASTIC UL 94 V-0, BLACK
5. CONTACTS: COPPER ALLOY
PLATING: 8µin HARD GOLD over min. 50µin NICKEL
CONTACT TAILS PRETINNED
6. METAL BRACKET: ZINC DIE CAST; 300µin COPPER/40-120µin NICKEL/120-200µin TIN
7. THREADED INSERT: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
8. CAPACITANCE: 2 x 1300pF ± 20%
9. DIELECTRIC WITHSTANDING VOLTAGE: 300 VDC
10. P.C.B. HOLE DRILLINGS ON SHEET 2
11. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
12. CONNECTOR IS PART MARKED: 241A26320X CONEC ABC

Directive 2002/95/EC
"RoHS"
Compliant

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH				DO NOT ALTER CAD DRAWING BY HAND	
finish:	tolerance	dim. in mm		scale: 2:1 (5:1)	
	ISO 2768-m			material: see notes	
		date	name	title:	
		drawn 10.09.07	Schmidt	D-SUB π Filter Male 90° 9pos., 0.590inch threaded insert, metal bracket and snap	
		appd. 10.09.07	Mickenbecker		
		norm	DIN 41652		
		d-old			
a	Origin			dwg no: Inventor 10	DIN-A3
rev.	description			date	name
				part no:	241A26320X

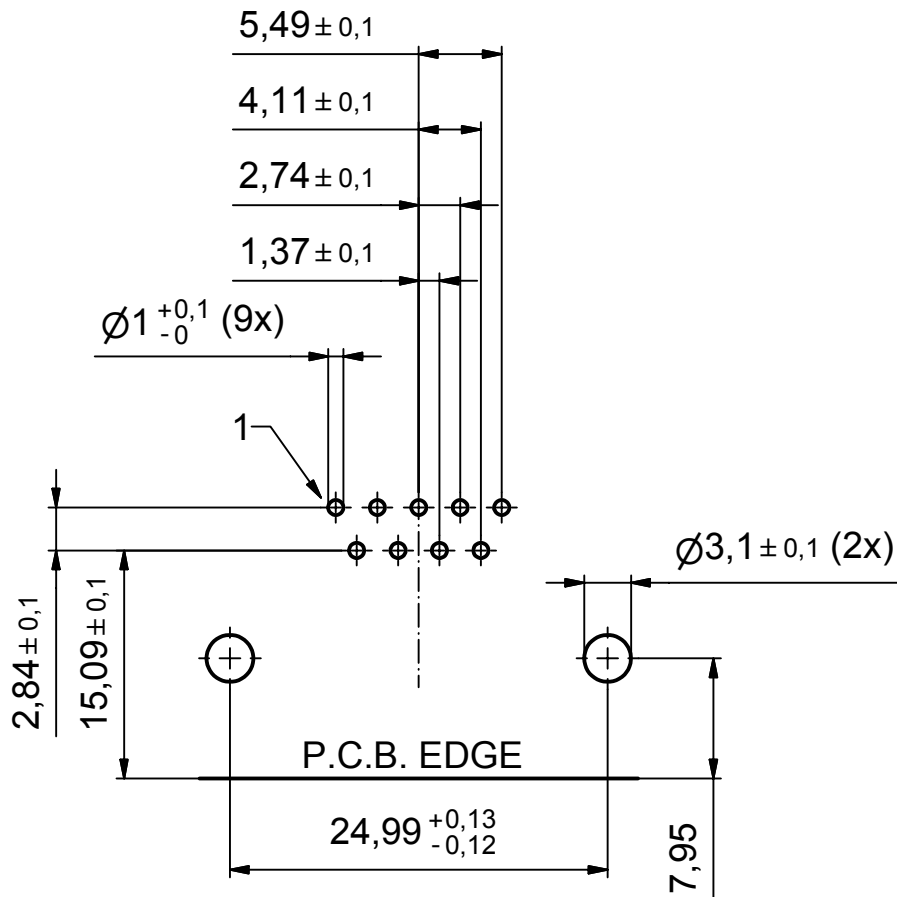

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
 OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

finish:				tolerance ISO 2768-m		 dim. in mm		scale: 2:1		
rev.	description	date	name	date	name	material: see sheet 1				
				drawn	10.09.07	title:				
				appd.	10.09.07	P.C.B. HOLE DRILLINGS				
				norm	DIN 41652	D-SUB π Filter Male 90° 9pos., 0,590inch				
				d-old		threaded insert, metal bracket and snap				
a	Origin					dwg no: 24K1A1041		Inventor 10		DIN-A4
						part no: see sheet 1				sh: 2

scale: 2:1		material: see sheet 1	
title: P.C.B. HOLE DRILLINGS			
D-SUB π Filter Male 90° 9pos., 0,590inch			
threaded insert, metal bracket and snap			
dwg no: 24K1A1041		Inventor 10	
		DIN-A4	
		sh: 2	
part no: see sheet 1			