


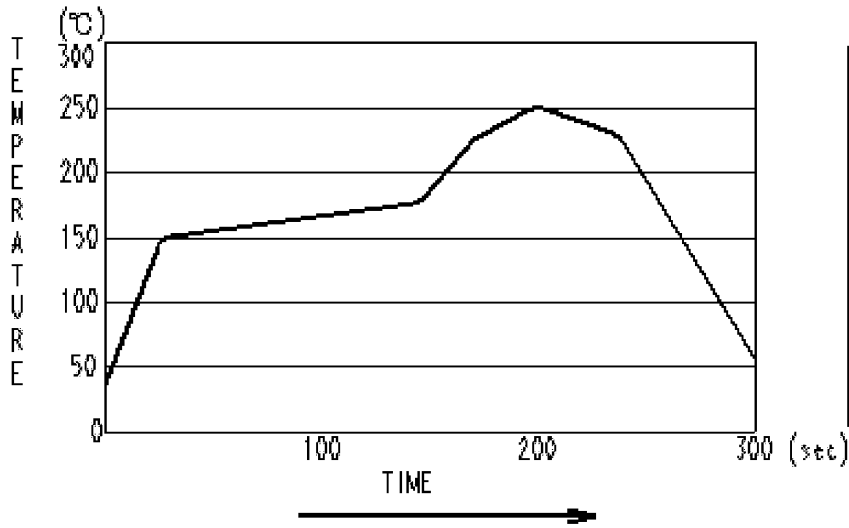


APPLICABLE STANDARD					
RATING	OPERATING TEMPERATURE RANGE	-40°C TO 85°C	STORAGE TEMPERATURE RANGE	-40°C TO 85°C	
	VOLTAGE	125VAC	OPERATING HUMIDITY RANGE	5 % TO 95 %	
	CURRENT	1A	APPLICABLE CABLE	—	
SPECIFICATIONS					
ITEM	TEST METHOD	REQUIREMENTS	QT	AT	
CONSTRUCTION					
GENERAL EXAMINATION	VISUALLY AND BY MEASURING INSTRUMENT.	ACCORDING TO DRAWING.	X	X	
MARKING	CONFIRMED VISUALLY.		X	X	
ELECTRIC CHARACTERISTICS					
CONTACT RESISTANCE	100 mA (DC OR 1000 Hz).	40 mΩ MAX.	X	—	
INSULATION RESISTANCE	250 V DC.	1000 MΩ MIN.	X	—	
VOLTAGE PROOF	350 V AC FOR 1 min.	NO FLASHOVER OR BREAKDOWN.	X	X	
MECHANICAL CHARACTERISTICS					
INSERTION AND WITHDRAWAL FORCES	MEASURED BY APPLICABLE CONNECTOR.	32 N MAX.	X	—	
MECHANICAL OPERATION	20000 TIMES INSERTIONS AND EXTRACTIONS.	1) CONTACT RESISTANCE: 60 mΩ MAX. 2) NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	X	—	
VIBRATION	FREQUENCY 10 TO 55 Hz SINGLE AMPLITUDE 0.75 mm, AT 2 h, FOR 3 DIRECTIONS.	1) NO ELECTRICAL DISCONTINUITY OF 10μs. 2) CONTACT RESISTANCE : 60 mΩ MAX 3) NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	X	—	
SHOCK	490 m/s ² DIRECTIONS OF PULSE 11 ms AT 3 TIMES FOR 3 DIRECTIONS.		X	—	
ENVIRONMENTAL CHARACTERISTICS					
DAMP HEAT (STEADY STATE)	EXPOSED AT 60°C , 90~95%, 96h	1) CONTACT RESISTANCE : 60 mΩ MAX 2) INSULATION RESISTANCE: 1000 MΩ MIN. (AT DRY)	X	—	
RAPID CHANGE OF TEMPERATURE	TEMPERATURE -55 → 5-35 → +85 → 5-35 °C TIME 30 → 2~3 → 30 → 2~3 min. UNDER 5 CYCLES.	3) NO DAMAGE, CRACK AND LOOSENESS OF PARTS.			
CORROSION SALT MIST	EXPOSED IN 5 % SALT WATER SPRAY FOR 48 h.	NO HEAVY CORROSION.	X	—	
MIXED GAS CORROSION	EXPOSED IN SO ₂ 10 ppm , H ₂ S 3ppm 70 ~ 80%RH, FOR 96 h				
RESISTANCE TO SOLDERING HEAT (REFLOW)	REFROUW TWICE UNDER THERECOMMENDED REFLOW TEMPERATURE PROFILE IN FIG-1	NO SIGNIFICANT DEFOMATION OR LOSSENESS OF CONTACTS.	X	—	
RESISTANCE TO SOLDERING, SOLDER IRON METHOD	TEMPERATURE OF SOLDERING IRON : 350±5°C,5±0.5 SEC	NO DAMAGE, CRACK AND LOOSENESS, OF PARTS.	X	—	
RECOMMENDED REFLOW PROFILE IN FIG-2					
	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
					
REMARK			APPROVED	HO. MIWA	07.07.13
			CHECKED	SJ. SHIMIZU	07.07.12
			DESIGNED	TS. ITO	07.07.12
Unless otherwise specified, refer to JIS C 5402.			DRAWN	TS. ITO	07.07.12
Note QT:Qualification Test AT:Assurance Test X:Applicable Test			DRAWING NO.		ELC4-124784-02
	SPECIFICATION SHEET		PART NO.	3560-24P-PG (57)	
	HIROSE ELECTRIC CO., LTD.		CODE NO.	CL235-0023-6-57	 1/2


ATTACHMENT FIGURE

FIG.1 REFLOW TEMPERATURE PROFILE



TEMPERATURE RANGE	TIME
150-180	120 sec
200 MIN	95 sec
220 MIN	70 sec
230 MIN	50 sec
245 MIN	20 sec
250	MOMENT

FIG.2. RECOMMENDED REFLOW TEMPERATURE PROFILE

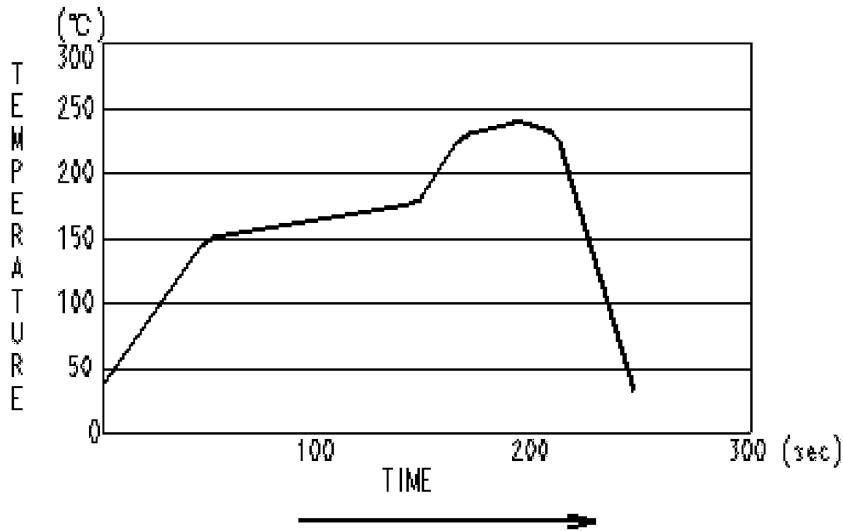

TEMPERATURE RANGE	TIME
150-180	60 sec
200 MIN	55 sec
220 MIN	40 sec
230 MIN	30 sec
235 MIN	20 sec
240	MOMENT

Note QT:Qualification Test AT:Assurance Test X:Applicable Test

DRAWING NO.

ELC4-124784-02



SPECIFICATION SHEET

PART NO.

3560-24P-PG (57)

HIROSE ELECTRIC CO., LTD.

CODE NO

CL235-0023-6-57



2/2