

**Technical specification:**

Rated voltage: 4pos 5pos  
IEC 61076-2-101 250 V 60 V

Current rating: 4 A at 40°C  
IEC 61076-2-101

Insulation resistance: >=100 MΩ  
IEC 60512

Pollution degree: 3/2  
IEC 60664-1

Degree of protection: IP 67, in mated condition  
IEC 60529

Temperature range: -30°C ... +105°C

Mating cycles: >=100  
IEC 60512-9a



**Materials:**

Contact: CuZn


Contact plating: Nickel, gold plated


Contact carrier: PA GF, UL 94, like RAL 9005

Sealing: FPM

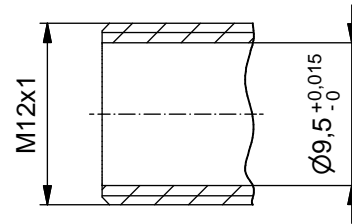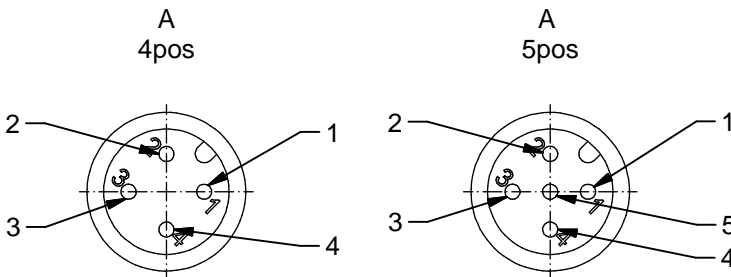

Part no:	Description:	Pos	Construction:
43-01336	SAL - 12 - ES4 - L	4	without sealing
43-01337	SAL - 12 - ES5.1 - L	5	without sealing
43-01338	SAL - 12 - ESO4 - L	4	with sealing
43-01339	SAL - 12 - ESO5.1 - L	5	with sealing

DO NOT ALTER CAD DRAWING BY HAND Directive 2011/65/EU RoHS compliant	Index: f 07.08.13 fro Ä4867 Colour changed	 dim. in mm	
		date	name
		drawn 13.10.08	Fromm
		appd. 27.10.08	Mankopf
general tolerance:	0 ± 0,50mm		
	0,0 ± 0,25mm		
	0,00 ± 0,10mm		
THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH			

		title: Male socket M12x1 with soldering version	
		dwg no:  43K1A754	
		part no:	