


ED 800

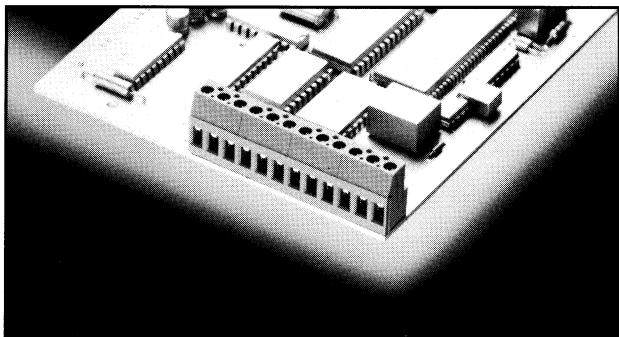

Spacing 10.0 mm
insert required no. of poles **
How to order see page 6

Ratings:

* Approvals pending



UL1059



CSA 22.2 No. 158



EN 60998

Rated Voltage

250 VB

300 VB

450 V

Rated Current

15 A

7 A

24 A (T60)

Wire Size

AWG 22-14

AWG 22-14

2.5 mm²

Test Voltage

2.0 Kv

Rated Torque/Screw Size

0.5 Nm/M3

Rated Cross Section

Single Wire (solid)

2.5 mm²

Stranded Wire (flexible)

2.5 mm²

Stranded wire with Ferrules

2.5 mm²

Dimensions

Spacing

10.0 mm

PCB Hole Diameter

1.3 mm

Stripped Length

8.0 mm

Materials

Insulating Material

PA

Flammability Class

UL94 V-0

Temperature Range

-30°C/+105°C

Terminal Block

CuZn

Wire Guard

Cu

Color

Green

