


# CnC Tech . LLC

STYLE 品名	PVC INSULATED 105°C 300V HOOK UP WIRE	DATE 日期	2012-11-15
SIZE 规格	UL2651 28AWG 7/0.12TS CONDUCTOR	REV 版本	A0
ITEM 类型	HP-XXP-28#-7/0.12TS-1.27		
STANDARD 标准	UL785 UL1581 C22.2		
APPLICATION 用途:	INTERNAL WIRING OF APPLIANCES AND ELECTRONIC EQUIPMENT		
CONSTRUCTION 加工:			

CONDUCTOR 导体	SIZE 规格	28AWG			
	CONSTRUCTION 结构	7/0.12±0.003mmTS			
	MATERIAL 材质	TINNED COPPER CONDUCTOR			
	CONDUCTOR DIAMETER 导体直径	0.36mm			
INSULATION 绝缘	MINIMUM THICKNESS 最小厚度	0.23mm			
	AVERAGE THICKNESS 平均厚度	0.26mm			
	COLOR 颜色	UL2651 GRAY FLAT CABLE			
JACKET 外被	DIAMETER 外径	0.9±0.05mm			
	MATERIAL 材质	105°C PVC			
	PITCH 间距	1.27±0.05mm			
	MARKING 印字	UL AWM 2651 28AWG 105°C 300V VW-1 E332441 C UL AWM I A 105°C 300V FT1			
ELECTRIC 电气 FUNCTION 功能	RATE VOLTAGE 额定电压	300V			
	VOLTAGE-WITHSTAND 耐电压	2500V/ONE MINUTE			
	COND.RESISTANCE 导体电阻	MAX: 237Ω/KM 20°C			
	INSU.RESISTANCE 绝缘电阻	MIN: 100MΩ/KM 20°C			
	TENSILE STRENGTH 抗张强度	老化前	1500PSI	老化后	1290 PSI (85%)
	ELONGATION 伸长率		100%		75% (65%)

**FLAT /WIRE CABLE 排线电缆**

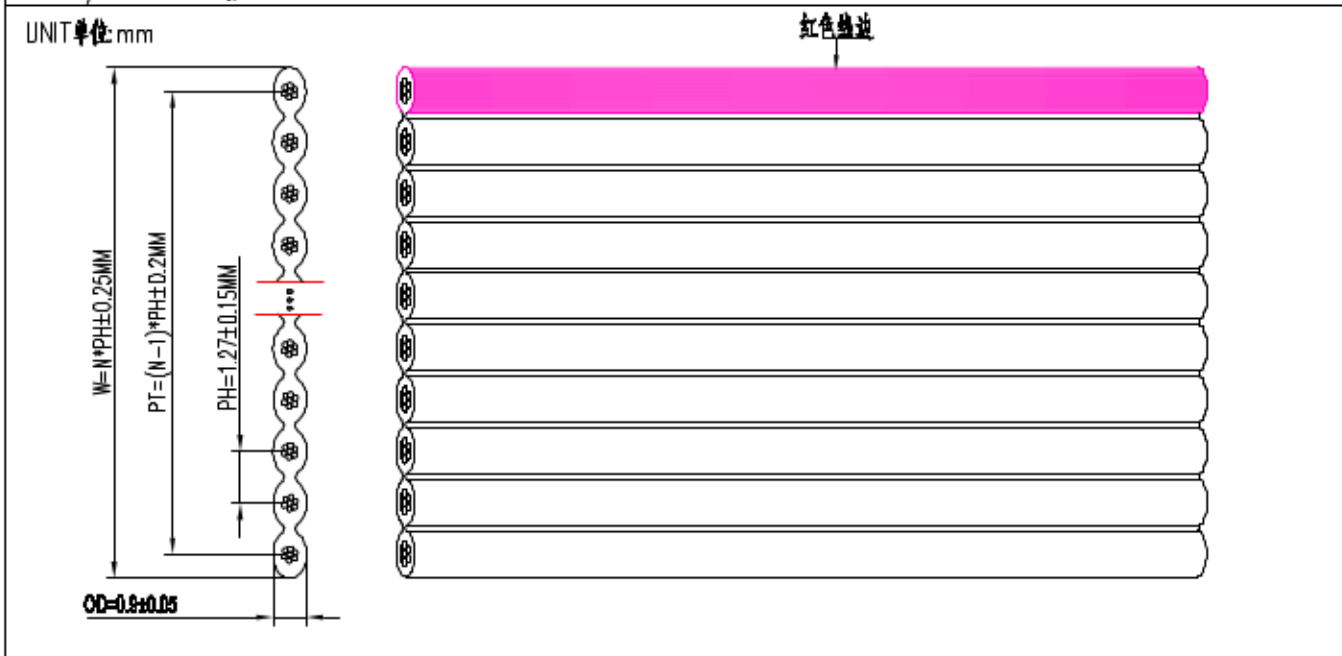

制作	马翠华	审核	袁志勇	核准	
----	-----	----	-----	----	--