
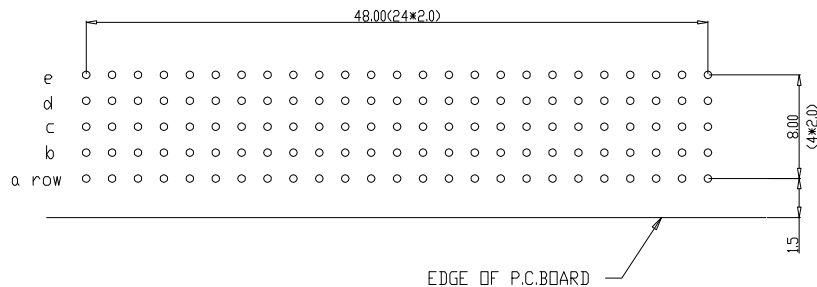


PERFORMANCE CHARACTERISTICS

1.5 A AT 20°C (FULLY LOADED)
 CURRENT RATING: 1 A AT 70°C (FULLY LOADED)
 RATED VOLTAGE: 500 V AC (CONT /CONT)
 OPERATING TEMPERATURE : -55°C TO 125°C
 CONTACT RESISTANCE : 20 m Ω MAX
 INSERTION FORCE: 0.75N MAX/CONT
 EXTRACTION FORCE : 0.15N MIN /CONT
 INSULATION RESISTANCE: 10⁴ MΩ MIN

NOTES

- LEAD FREE INDICATOR :LF=LEAD FREE
- THIS PRODUCT IS CSA APPROVED.
THIS PRODUCT IS UL RECOGNIZED.
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A.201572.001
- THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

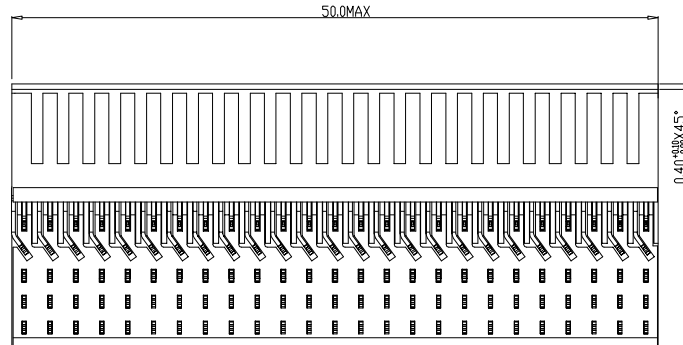

rev	ecn no	dr	date	Dr	10 2 92	J.V.B	Product family	size	Scale
A	CONVERSION REVISION 06	KN	14-9-01	Eng				A1	5.000
B	105-0093	MINI	17-06-05	Chr			Model Name	ECN	
C	DG05-0278	kason	02-08-05	Appr			Model Revision	REL Level	
D	DG06-0274	kason	05-07-06						
E	DG07-0362	kason	05/09/07						
F	DG10-0110	NZ	03-22-10						

Material	Spec ref	
Mat code	✓	TOLERANCE
Heat treat		1DEC ±0.2 1DEC
Plating/Finish		2DEC ±0.1 2DEC
		ANGLES ±1°HÖEKEN
Dr	10 2 92	J.V.B
size	A1	Scale
Product family		
Model Name		ECN
Model Revision		REL Level
Pro/E file	CAT.NO. HM2R02PA5100----	CUSTOMER DRAWING
Part No	MPACS 5+2R RA	Rev.
Part No	RCP CONN TYPE B	F
Part No	B.S.C .201418.002	
Part No		