

# SPECIFICATION FOR APPROVAL



TO: \_\_\_\_\_

PART NO.		REV.		DELTA SAMPLE ISSUE NO	
PART NAME	POWER ENTRY MODULE		DELTA MODEL		10C3
ORDER P/N.	10C3		SAMPLE ISSUE DATE		

1. ELECTRICAL CHARACTERISTICS:

1-1. VOLTAGE RATING ..... 250VAC

1-2. CURRENT RATING

A. AT 115/250VAC ..... 10 A RMS Max.

1-3. HIPOT RATING (FOR ONE MINUTE)

A. LINE TO GROUND ..... 2000VAC

B. LINE TO LINE ..... 2000VAC

1-4. MINIMUM INSERTION RESISTANCE: @500VDC

A. LINE & NEUTRAL TO GROUND ..... 10M OHM

B. LINE TO NEUTRAL ..... 10M OHM

1-5. SAFETY

REPORT BY	CHECKED BY	APPROVED BY		
			REV.	

**DELTA ELECTRONICS, INC.**

186 RUEY KUANG ROAD, NEIHU. TAIPEI 114,  
TAIWAN, R.O.C.  
TEL:886-2-87972088 FAX:886-2-87972120


# SPECIFICATION FOR APPROVAL




TO: \_\_\_\_\_

PART NO.		REV.		DELTA SAMPLE ISSUE NO	
PART NAME	POWER ENTRY MODULE			DELTA MODEL	10C3
ORDER P/N.	10C3			SAMPLE ISSUE DATE	


## 2. PHYSICAL DIMENSIONS:

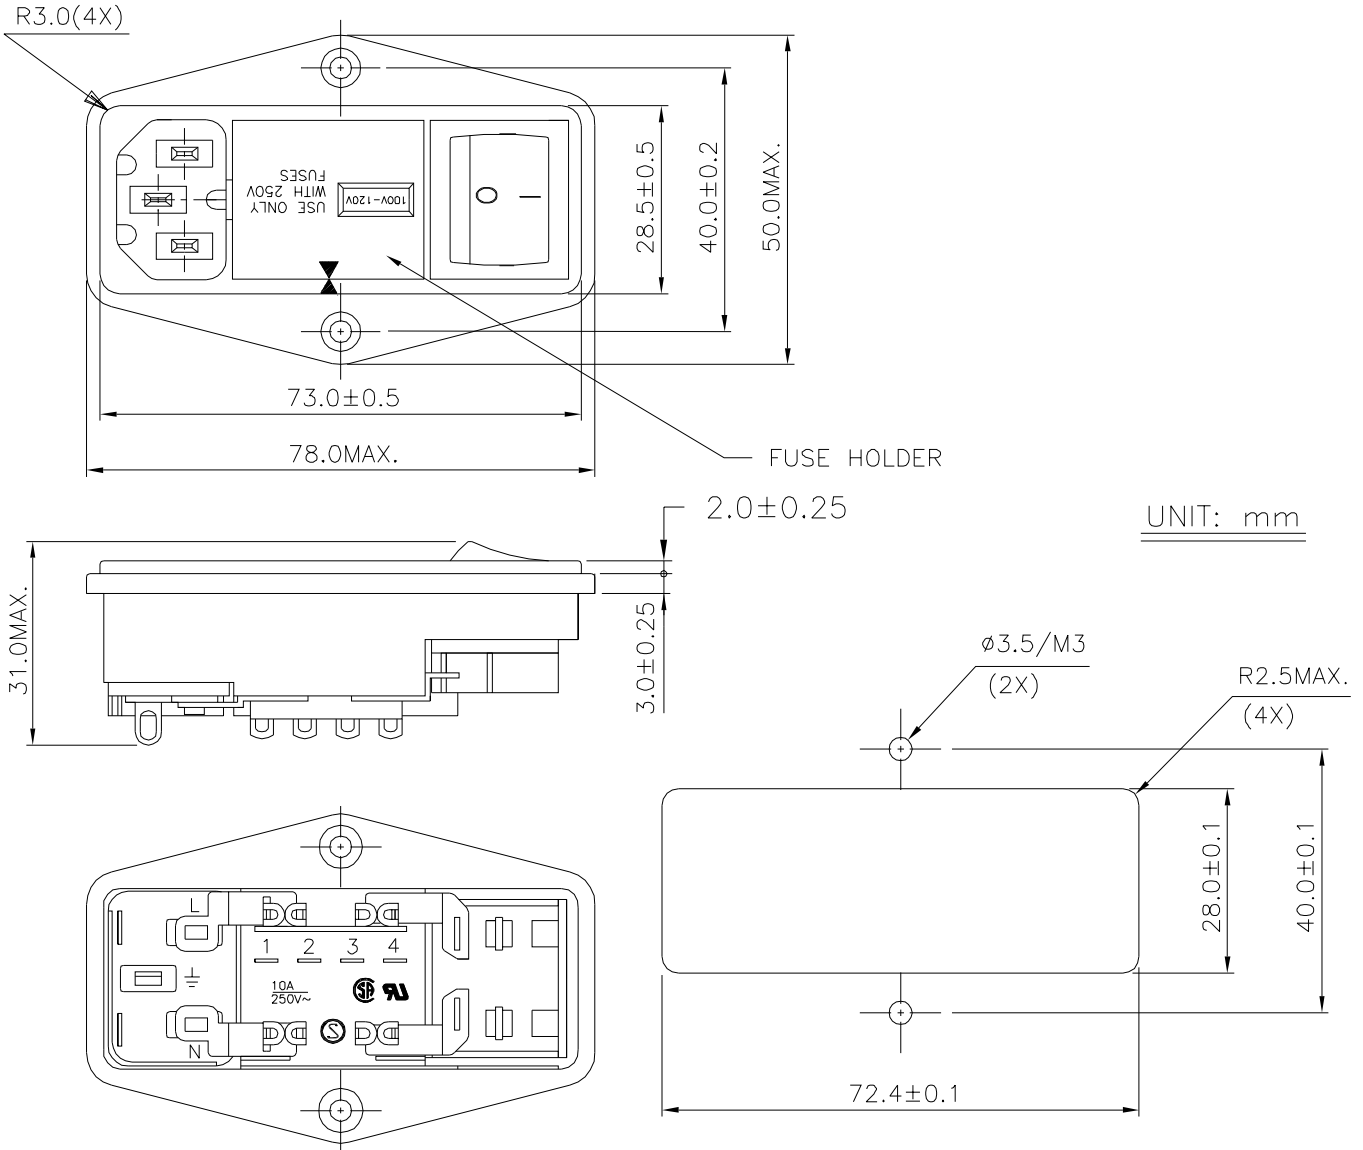

## 3. ELECTRICAL SCHEMATIC:

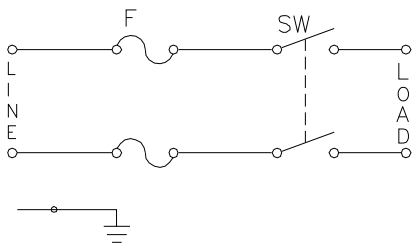

### MOUNTING CUTOUT

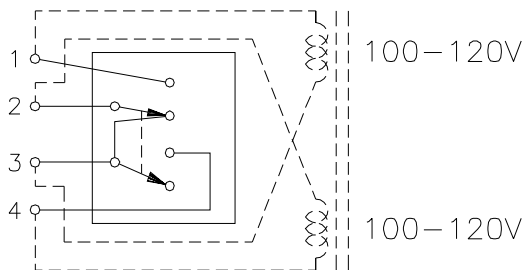

REPORT BY	CHECKED BY	APPROVED BY	UNLESS OTHERWISE SPECIFIED DIMENSION TOLERANCE		
			DCEIMALS .X±	.XX±	ANGLES±
			REV.		

**DELTA ELECTRONICS, INC.**

186 RUEY KUANG ROAD, NEIHU, TAIPEI 114,  
TAIWAN, R.O.C.  
TEL:886-2-87972088 FAX:886-2-87972120