
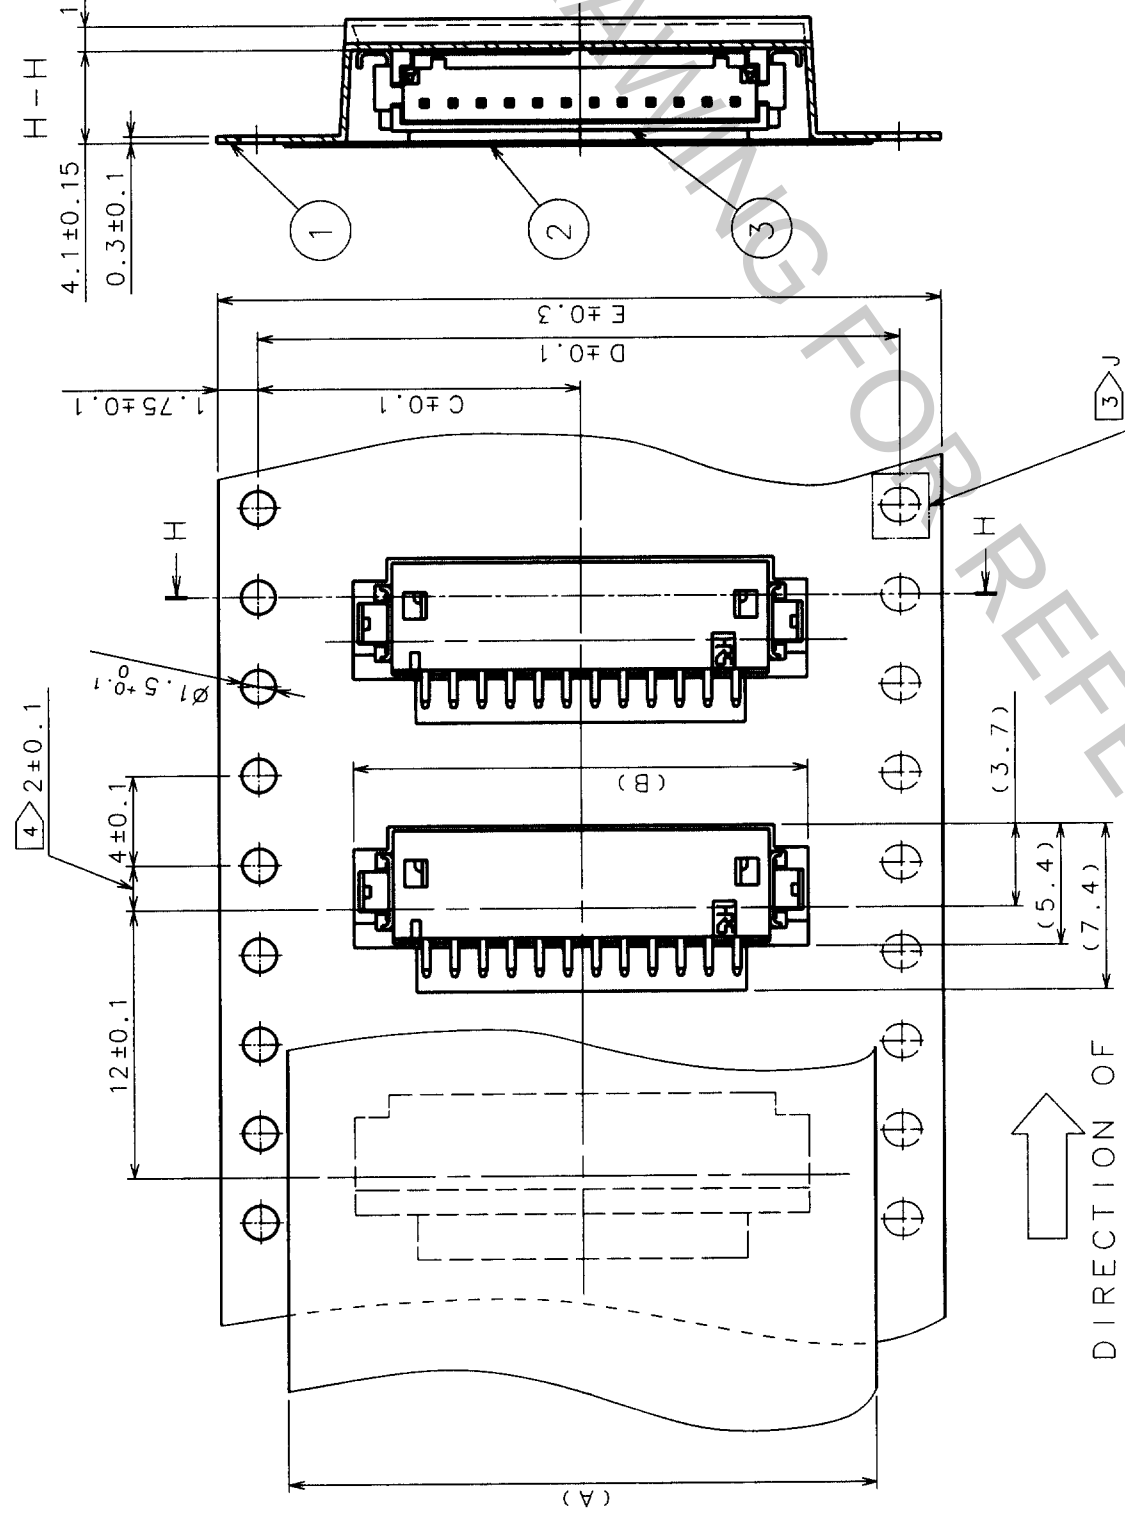


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△				
△					△				
△					△				

CODE NO.	PART NO.	A	B	C	D	E	F
CL536-0301-8-51	DF13A-2P-1.25H(51)	13.5	7.6	7.5		16	16.4
CL536-0302-0-51	DF13A-3P-1.25H(51)	13.5	8.85	7.5		16	16.4
CL536-0303-3-51	DF13A-4P-1.25H(51)	21.5	10.1	11.5		24	24.4
CL536-0304-6-51	DF13A-5P-1.25H(51)	21.5	11.35	11.5		24	24.4
CL536-0305-9-51	DF13A-6P-1.25H(51)	21.5	12.6	11.5		24	24.4
CL536-0306-1-51	DF13A-7P-1.25H(51)	21.5	13.85	11.5		24	24.4
CL536-0307-4-51	DF13A-8P-1.25H(51)	21.5	15.1	11.5		24	24.4
CL536-0308-7-51	DF13A-9P-1.25H(51)	21.5	16.35	11.5		24	24.4
CL536-0309-0-51	DF13A-10P-1.25H(51)	21.5	17.6	11.5		24	24.4
CL536-0310-9-51	DF13A-11P-1.25H(51)	26	18.85	14.2	28.4	32	32.4
CL536-0311-1-51	DF13A-12P-1.25H(51)	26	20.1	14.2	28.4	32	32.4
CL536-0313-7-51	DF13A-14P-1.25H(51)	26	22.6	14.2	28.4	32	32.4
CL536-0314-0-51	DF13A-15P-1.25H(51)	37	23.85	20.2	40.4	44	44.4

### DETAIL OF PART NO. LABEL

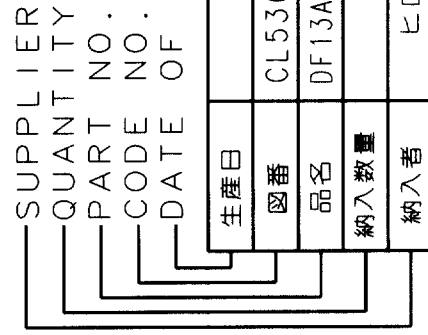


↑ DIRECTION OF UNREELING

NOTES

- 1 REEL 1000 CONNECTORS.
- 2 AT THE BEGINNING OF THE REEL, 30 COMPONENTS SHALL BE EMPTY. AT THE END OF THE REEL, 20 COMPONENTS SHALL BE EMPTY.
- 3 WHEN THE TAPE WIDTH IS 32 OR 44mm, SPROCKET HOLES SHALL BE SET ON BOTH SIDES OF REEL AS SHOWN ON THIS DRAWING.
- 4 WHEN THE TAPE WIDTH IS 44mm OR OVER, THE TOLERANCE SHALL BE 2±0.15.

### STYLE AND DIMENSION OF REEL

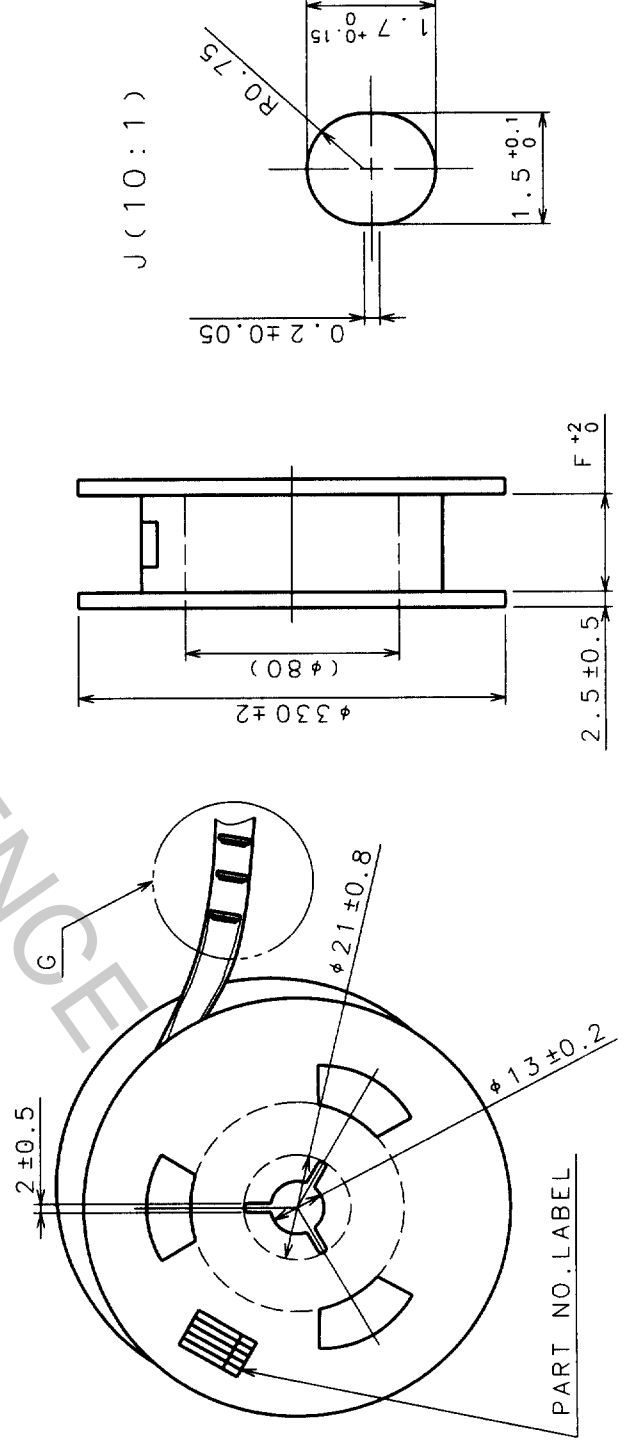

2	POLYESTER	CLEAR (COVER TAPE)	FINISH, REMARKS	3	DF13A-*P-1.25H(01)		
1	PAN	CLEAR (EMBOSSED CARRIER TAPE)					
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS		
CODE NO. (OLD)	DRAWN		DESIGNED	CHECKED	APPROVED	RELEASED	
		<i>F. Asai</i>	<i>F. Asai</i>	<i>K. Kobayashi</i>	<i>K. Kobayashi</i>		
		98.6.23	98.6.23	98.6.25	98.6.25		
	DRAWING NO.	PART NO.					
	EDC3-162444-02	DF13A-*P-1.25H(51)					
SCALE	CODE NO.			CODE NO. SHALL BE ACCORDANCE WITH TABLE.			
FR:EE	1						
UNITS	mm						
	HIROSE ELECTRIC CO.,LTD.						