

Ŧ	D G	<u>п</u>	m	D	<u>с</u>



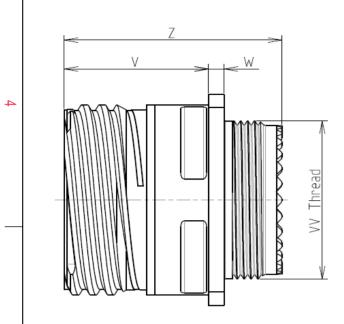

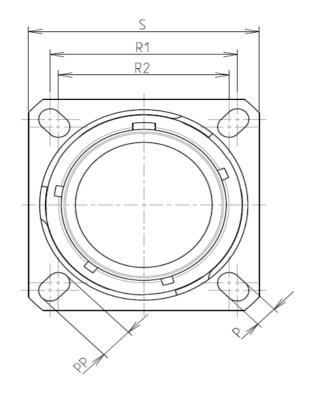

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 17

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Black Zinc Nickel			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	-65°C to +175°C			
-Salt Spray	: 500 hours			

: 35.93 g ± 10%

8D 0

G

17

Ζ

08

S

F

Ν

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	26.97		
R2	24.61		
S	33.3±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M25x1-6g		


ORIENTATION : N

CONTACT LAYOUT : 17-08

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

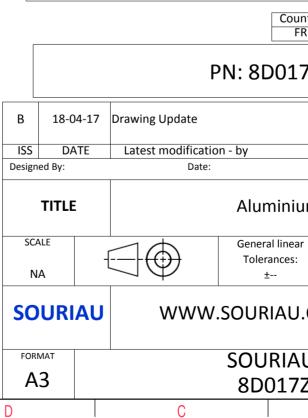

	Φ		A		
					4
AS EXA	AMPLE				3
any non-conformity or damage which does not comply with of the Parties or by a third party adation, technical notice.)					
Intry R	Jurisd	liction & Cont Not Listed	troi list		2
7Z08SN					
				MOD N°	
um	customer drawing m Receptacle 8D series				
ar	NPRDS / PROJECT				
		_	59		1
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
				SHEET	
20	8SN-C B		A	±/ £	J

		G	г	m		0	
		Contact Layout					Panel Cutor
4	-x ($ \begin{array}{c} $			λ ~	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Conta position A B C C D E	Contacts (Insert arrangement 17-8) act Location X-axis Y-axis (mm) (mm) +.000 (0.00) +.236 (5.99) +.128 (3.25) +.096 (2.18) +.230 (5.84) 078 (1.98) +.094 (2.39) 216 (5.49)			4	Max. thickness panel for receptacle: Ty	_Ø⊺ ype 0: front mod
ω	F G H Shell Arrangement Nur size no. coi	128 (3.25) +.086 (2.18)				Dim ØA ØAA R1 ØT	A
						SOURIAU shall not be li due to a use of the P the Specifications issued (professional rec	Products wh by either o
N						PN: 8	Countr FR 3D0172
_					B 18-04-1 ISS DATE Designed By:	7 Drawing Update Latest modification - by Date:	
_					TITLE SCALE NA	Gen	uminiun Ieral linear Ierances: ±
					FORMAT		iriau.c Uriau
	Н	G	F	E	A3		D017Z
					\bigvee		

