



**Wiha TorqueControl Adapters**

**Adapters For TorqueFix™ & TorqueVario™**



**285 81 Bit Holder Adapter For 1/4" Drive Bits**

Shaft CVM steel, hardened, corrosion protected.

Item					
No.	Size	mm	mm	lbs.	pkg.
285 81	1/4	149	4.0	.09	1



See pages  
185-197  
for Insert bits



**285 82 Square Drive Adapter For 1/4" Sockets**

Shaft CVM steel, hardened, corrosion protected.

Item					
No.	Size	mm	mm	lbs.	pkg.
285 82	1/4	145	4.0	.08	1



See pages  
211-215  
for Sockets



**285 83 Adapter Blade For Wiha 4 mm MicroBits**

Shaft CVM steel, hardened, corrosion protected.

Item					
No.	Size	mm	mm	lbs.	pkg.
285 83	4.0	149	4.0	.09	1



See pages  
159-160  
for Micro bits




**288 82 ESD Safe Bit Holder Adapter For 1/4" Drive Bits**

Shaft CVM steel, hardened, corrosion protected.

Item					
No.	Size	mm	mm	lbs.	pkg.
288 82	1/4	162	4.0	.09	1



See pages  
185-197  
for Insert bits

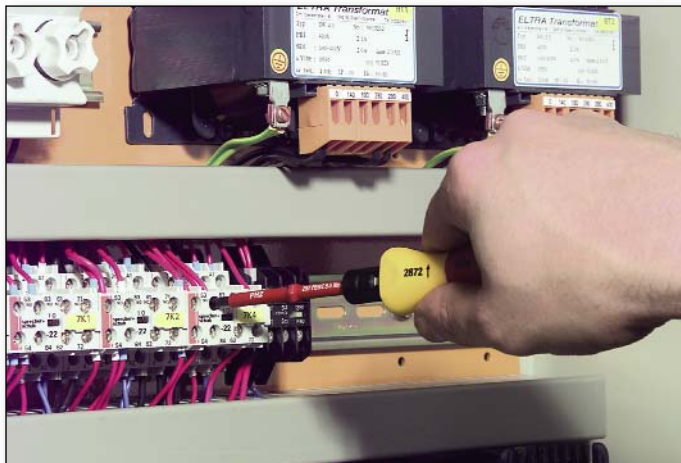

See Insulated Tools On Pages 87-110

**Wiha Insulated TorqueControl Tools**



**1000V**

Includes Certificate



**285 Insulated TorqueVario-S, With Window Scale Insulation**

**up to 1000 Volt. EN 60900, VDE, ASTM F-1505, NFPA EN ISO 6798, BS EN 26789, ASME B107.14M, VDE, ASTM F-1505-01 & NFPA70E, +/- 6% Accuracy Ergonomic multi-component handle, light and compact. Handle sizes proportioned to optimize torque range. Audible and perceptible click when torque setting has been attained.**

Item	Range				
No.	Inch lbs.	Increments	mm	lbs.	pkg.
285 14	7.5 - 20	.5 Inch lbs	126 - 131	.43	1
285 16	10 - 50	2 Inch lbs	133 - 138	.40	1
285 20	20 - 70	2 Inch lbs	137 - 142	.69	1

Each TorqueVario handle has unique serial number and certificate of calibration



10,000 Volt Tested



**287 Insulated Slotted Interchangeable Blades For TorqueVario-S**

Slotted tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum tool steel, hardened. VDE Insulated.

Item					Max. Torque	
No.	mm	Inch	mm	lbs.	Nm	pkg.
287 01	3.0	.118	190	.07	0.6	1
287 03	3.5	.139	190	.07	1.1	1
287 05	4.0	.157	190	.07	2.5	1
287 07	5.5	.216	190	.07	3.8	1

These Insulated Blades work in Insulated handles only



10,000 Volt Tested



**287 Insulated Phillips Interchangeable Blades For TorqueVario-S**

Phillips tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum tool steel, hardened. VDE Insulated.

Item					Max. Torque	
No.	Size	mm	mm	lbs.	Nm	pkg.
287 10	0	190	4.0	.07	0.9	1
287 11	1	190	4.0	.07	3.8	1
287 12	2	190	4.0	.07	5.5	1

These Insulated Blades work in Insulated handles only