

4840, solder terminal, Plug, 5.5 mm, 2-pole, DC Plug/Socket



Description


- Solder terminal :
for cable mounting
- Low Voltage DC Plug and Socket
- DC Plug: 2-pole , straight

Technical Data

Diameter	5.5 mm / 2.5 mm	Allowable Operation Temperature	-20 °C to 70 °C
Number of Poles	2-pole	Terminal	solder terminal nickel-plated
Ratings DC	1.0A / 12VDC	Style	straight
Dielectric Strength	500VDC	Lifetime	5000 Insertions
Insulation Resistance	> 100 MΩ @ 500VDC		

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [General Product Information](#)

Dimensions

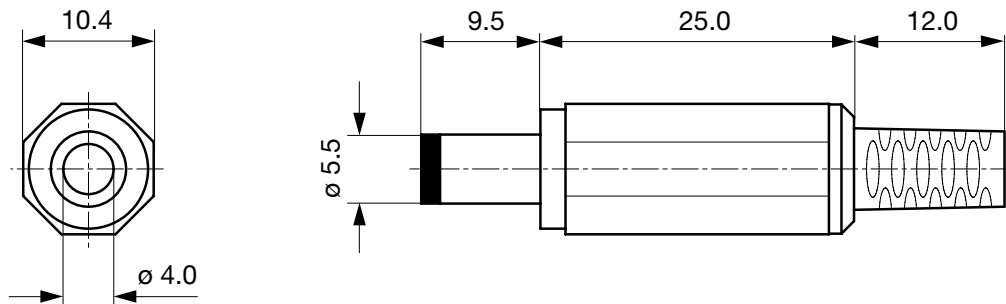

Cable diameter max. 4.0 mm

All Variants

Product group	Diameter [mm]	Number of Poles	Terminal	Order Number
DC Plug/Socket	5.5	2-pole	solder terminal	4840.1210

Most Popular.

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Packaging unit 100 Pcs

Mating Outlets/Connectors

Category / Description



[DC Plug/Socket Overview complete](#)

4840, solder terminal, Socket, 6.3 mm, 2-pole, DC Plug/Socket	4840.2210
4840, PCB terminals, Socket, 6.0 mm, 2-pole, DC Plug/Socket	4840.2211
4840, Cable, Plug, 5.5 mm, 2-pole, DC Plug/Socket	4840.5212

[DC Plug/Socket further types to 4840.1210](#)