




NB-IoT CELLULAR  
EMBEDDED MODEM  
FOR EUROPE

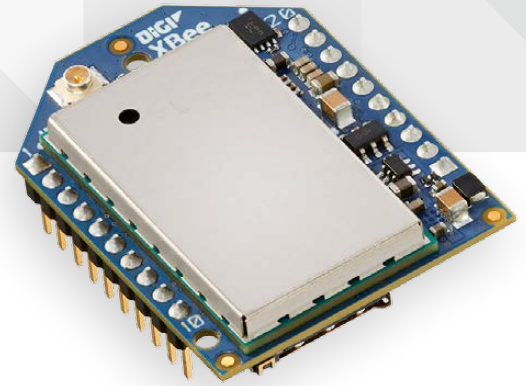

# DIGI XBEE® CELLULAR NB-IoT

Digi XBee Cellular NB-IoT embedded modems provide OEMs with a simple way to integrate low-power narrow-band cellular connectivity into their devices.

Digi XBee Cellular Narrowband IoT (NB-IoT) is a low-cost, low power wide area (LPWA) embedded cellular modem designed specifically to handle small amounts of data over existing cellular networks, provide improved range, and optimized for maximum battery life.


The modem is programmable, with support for custom MicroPython applications running directly onboard, allowing users to more efficiently manage their devices and eliminating the need for an external microcontroller in certain use-cases.

It includes the full suite of standard Digi XBee API frames and AT commands, so existing customers can simply drop this modem into their existing designs to instantly achieve cellular integration, without the pain and hassle of doing a complete re-design. It is also CE/RED certified, making it ideal for use in LPWA applications in Europe.


## BENEFITS

- Extremely low power consumption for battery life of 10+ years
- Excellent coverage and building penetration
- Reduced hardware complexity with only 1 antenna required
- Transparent and API modes simplify software integration
- Integrated MicroPython programmability
- Enhanced with Digi TrustFence™ security framework
- CE/RED certified and network tested
- Manage and configure with XCTU and Digi Remote Manager®
- Available with Digi provided SIM cards and data plans

## APPLICATION EXAMPLE

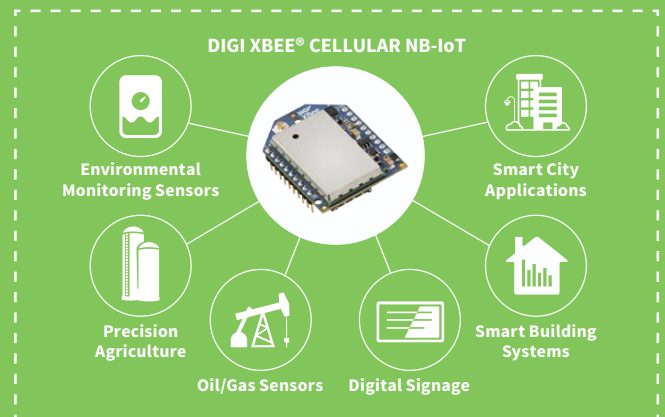

## RELATED PRODUCTS

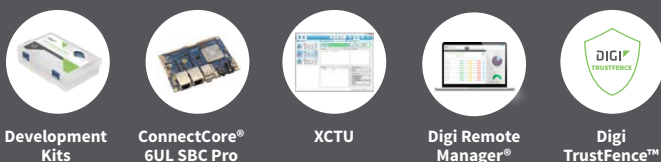

## SPECIFICATIONS

## Digi XBee® Cellular NB-IoT

INTERFACES AND HARDWARE	
CHIPSET REFERENCE	u-blox N210
SERIAL DATA INTERFACE	UART, SPI coming soon
CONFIGURATION METHODS	AT Commands, API Frames, local or OTA
OPERATING MODES	Transparent, API, Bypass
PROGRAMMABILITY	MicroPython with 8 KB Flash / 24 KB RAM
ANALOG I/O	4 ADC lines (10-bit)
DIGITAL I/O	15 DIO lines
FORM FACTOR	Digi XBee 20-pin through-hole
ANTENNA OPTIONS	1 U.FL
DIMENSIONS	24.38 mm x 32.94 mm
OPERATING TEMPERATURE	-40° C to +80° C
RF CHARACTERISTICS	
MODULATION	BPSK/QPSK
TRANSMIT POWER	Up to 23 dBm
RECEIVE SENSITIVITY	TBD
NETWORKING AND CARRIER	
CARRIER AND TECHNOLOGY	NB-IoT
SUPPORTED BANDS	Band 20
SECURITY	Digi Trustfence™ security with Secure Boot, Encrypted Storage, Protected JTAG
RF THROUGHPUT	TBD
DOWNLINK/UPLINK SPEEDS	Up to ~100 Kbps
DUPLEX MODE	Half-Duplex
POWER REQUIREMENTS	
SUPPLY VOLTAGE	2.5 to 4.2 V
TRANSMIT CURRENT	TBD
RECEIVE CURRENT	TBD
IDLE CURRENT (LISTENING)	TBD
DEEP SLEEP	TBD
REGULATORY AND CARRIER APPROVALS	
CE / RED	TBD

## PART NUMBERS

## DESCRIPTION

XBC-N1-UT-001	Digi XBee Cellular NB-IoT, Band 20, U.FL, TH, Europe
XKC-N1T-E	Digi XBee Cellular NB-IoT Development Kit, Band 20, Europe

The information provided in this document is preliminary and may be subject to change without notice.

**DIGI SERVICE AND SUPPORT** / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit [www.digi.com/support](http://www.digi.com/support).

© 1996-2017 Digi International Inc. All rights reserved.  
All trademarks are the property of their respective owners.

91003676  
A4/717

**DIGI INTERNATIONAL WORLDWIDE HQ**  
877-912-3444 / 952-912-3444 / [www.digi.com](http://www.digi.com)

**DIGI INTERNATIONAL GERMANY**  
+49-89-540-428-0

**DIGI INTERNATIONAL JAPAN**  
+81-3-5428-0261 / [www.digi-intl.co.jp](http://www.digi-intl.co.jp)

**DIGI INTERNATIONAL SINGAPORE**  
+65-6213-5380

**DIGI INTERNATIONAL CHINA**  
+86-21-50492199 / [www.digi.com.cn](http://www.digi.com.cn)

